

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

WZ-2RQ1T**ATM4000****WZ-2RQ1T**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
15

REPLACES

RELEASE NO.


CHECK

REVISIONS

A	CO17410
G C H	20 MAY 63
B	CO-69351-D
JWB	18 JUL 91
C	CO-77591
DAW	22 JUN 94
D	CO-79125
SAD	30 NOV 94
E	CO-82133
CSL	26 JUL 96
F	CO93346
DLT	22 SEP 98
G	0017585
LKM	20 FEB 06

CHECK

L.S.D. 15 JUN 63

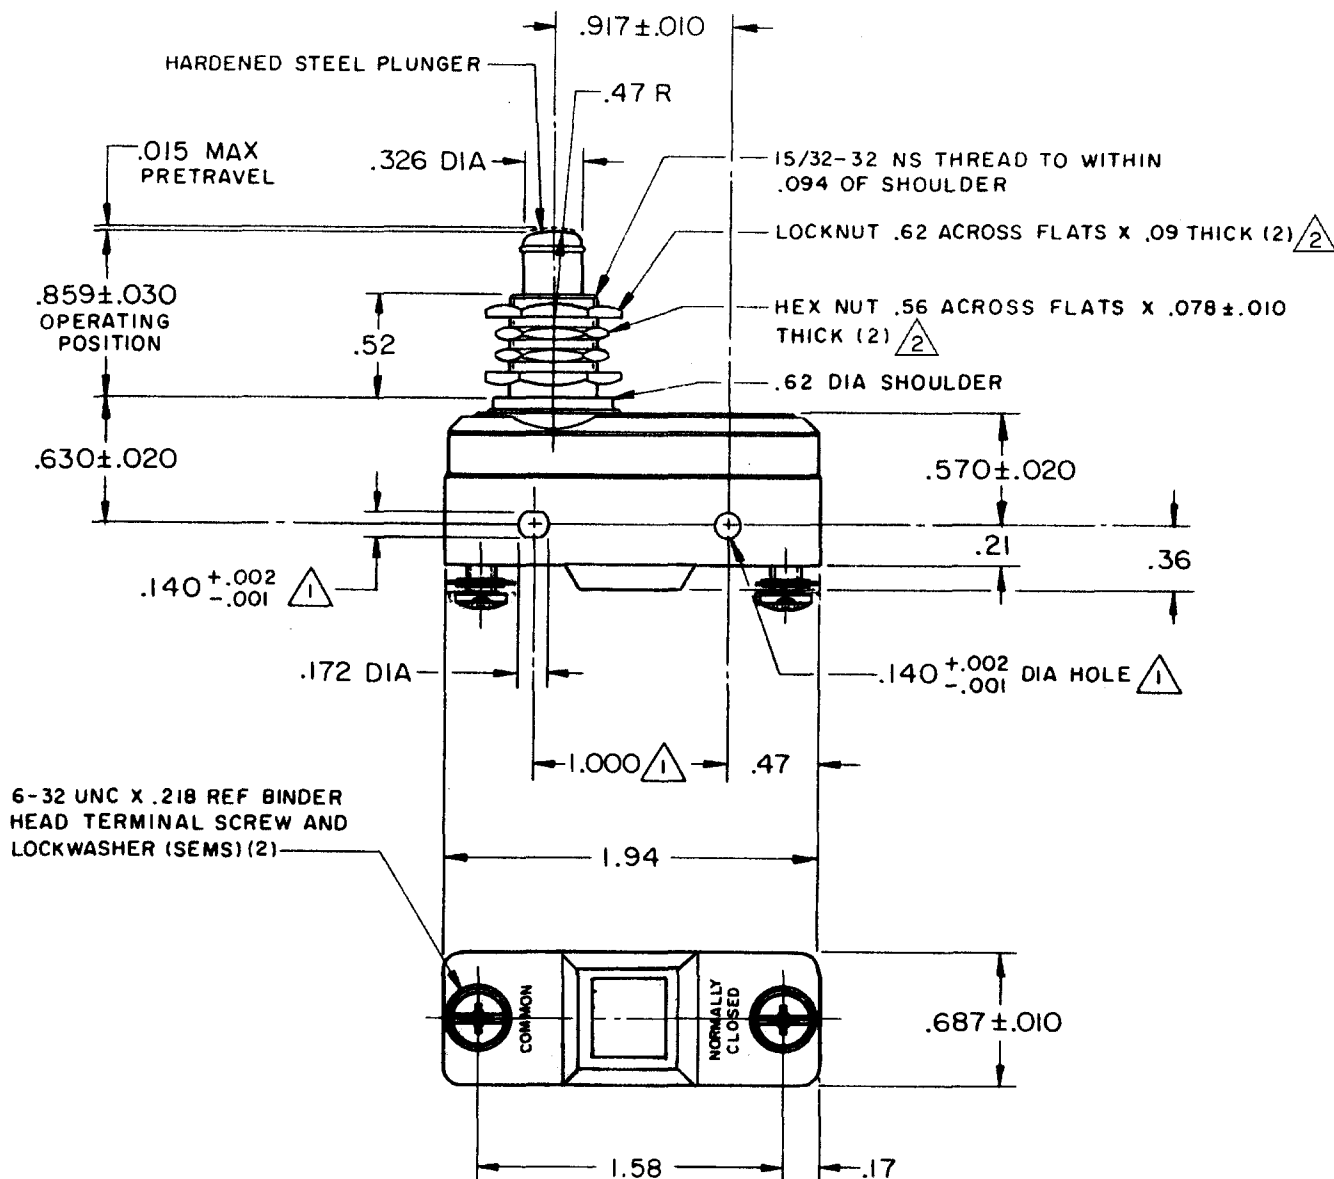

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9 - 13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ----- .0004 - .0020

OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC, 1/4 HP-250 VAC

-L288-
-L315-
-L306-

CE SP 05 RU
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .094 LB

FORMTEK

FO-50378

DRAWN

G C H 20 MAY 63