

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREDPORT, HAMMOND

SWITCH-BASIC

CATALOG LISTING
WZ-2RW84429-P52

AVJ5232

WZ-2RW84429-P52
PAGE 1 OF 1

DRAWING
NUMBER

ISSUE
8

REPLACES X68280-WZ

RELEASE NO. PR-7685

22AUG07

PSR

CHECK

17 FEB 06

RJ

CHECK

23 FEB 79

TSG

0033162


JA

CHECK

16 FEB 79

GRT

0-50378

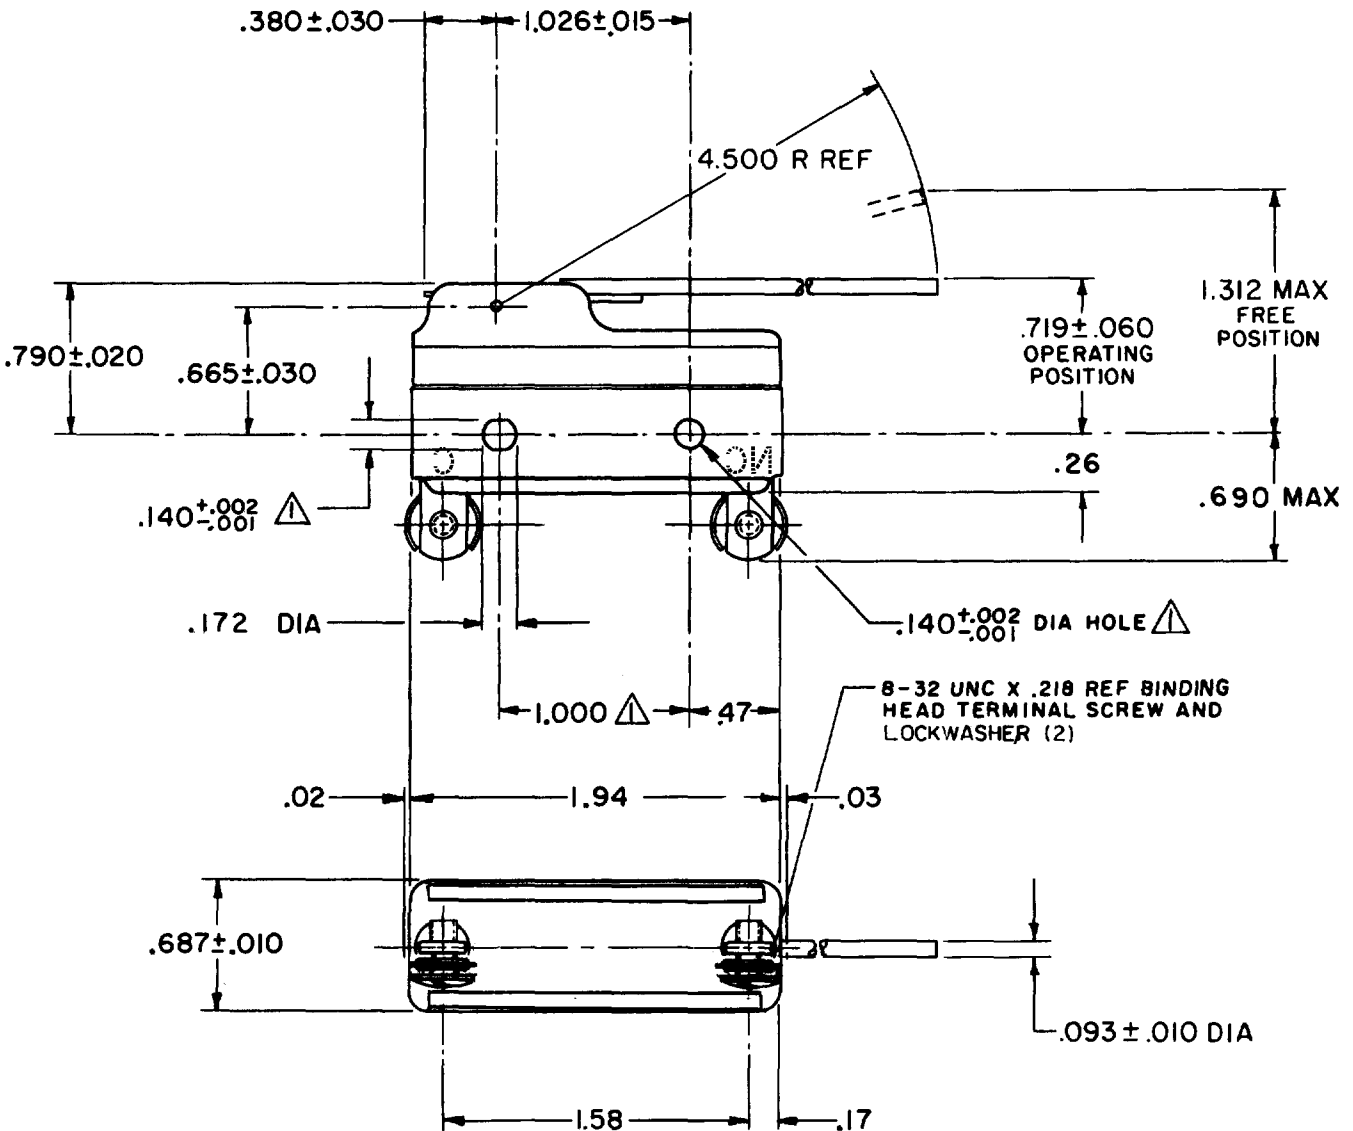

NOTE
 $\triangle$ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — — 3/4 OZ MAX	CONTACT ARRANGEMENT S P N C	DO NOT SCALE PRINT
DIFFERENTIAL FORCE — — — — — 1/2 OZ MAX	CODE L96 15A-125, 250 OR 480 VAC	UNLESS OTHERWISE SPECIFIED
PRETRAVEL — — — — — .625 MAX	1/8 HP-125 VAC; 1/4 HP-250 VAC	DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — — — — .027-.219	1/2A-125 VDC; 1/4A-250 VDC	TOLERANCES ARE:
OVERTRAVEL — — — — — .140 MIN	-L288- -L306- -L315-	ONE PLACE (.0) $\pm .030$
	CE 05	TWO PLACE (.00) $\pm .015$
	16A 250V ~ T85 5E4	THREE PLACE (.000) $\pm .005$
		ANGLES $\pm$
		WEIGHT