

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

WZ-R**WZ-R****M**DRAWING
NUMBER

88

12

ISSUE

10M

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO15200
J A N	22 JAN 65
B	CO23645
ORD	23 JAN 68
C	CO34162
D/B W	3 JUL 75
D	CO46304
WIM	13 DEC 79
E	CO-77592
DAW	15 AUG 94

CHECK

JAN 22 1965

CHECK


JAN 22 1965

JAN 22 1965

JAN 22 1965

JAN 22 1965

JAN 22 1965

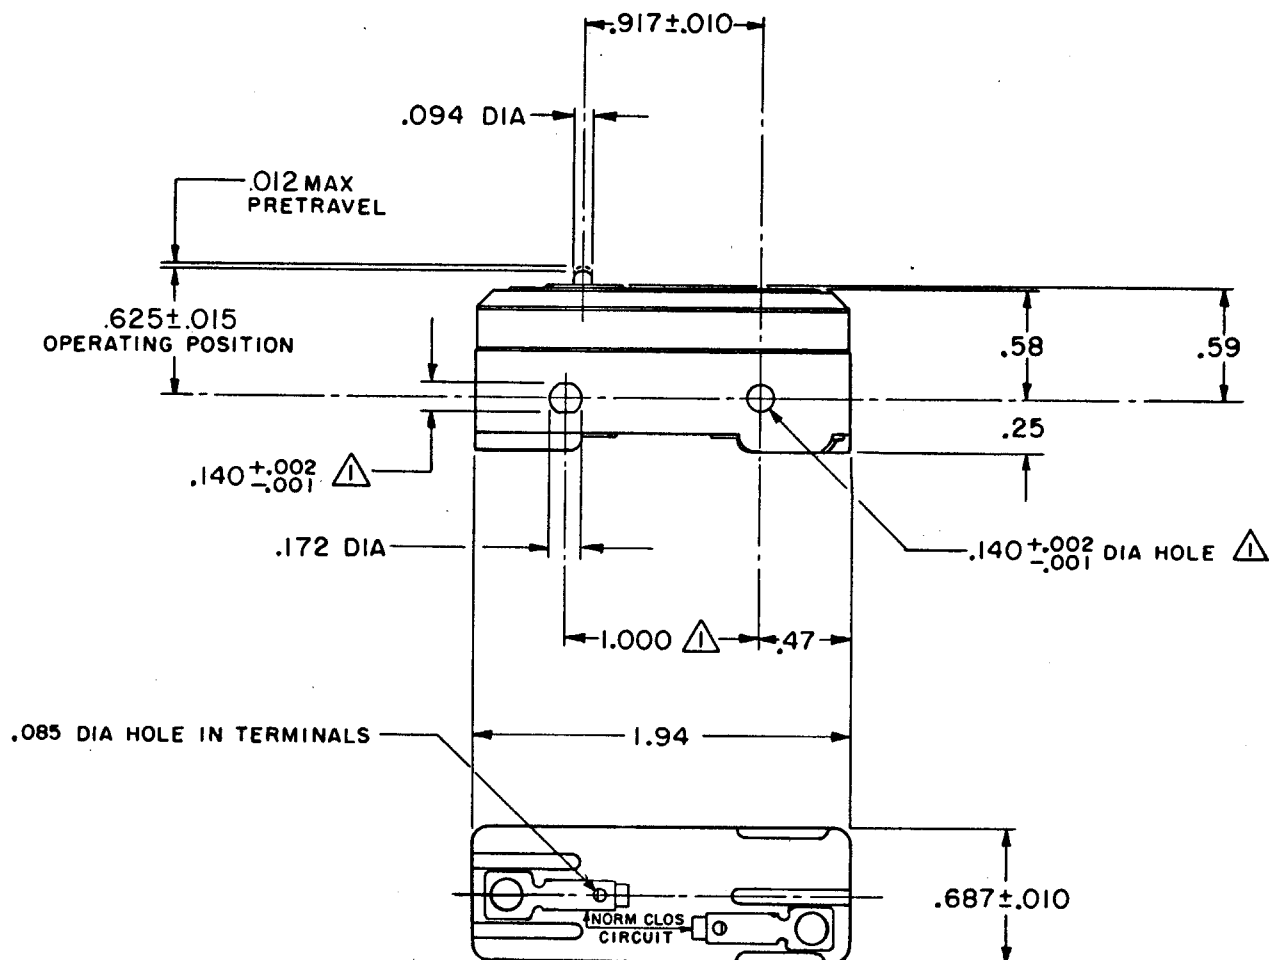

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-9 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL --- .00020-.00035

OVERTRAVEL ----- .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P N C

UNDERWRITERS' LAB. INC. LISTED RATING
-L103- 15 A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .050 LB

FO-50378

DRAWN