

**MICRO SWITCH**FREEPORT ILLINOIS
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

WZ-R141

CATALOG LISTING

WZ-R141

PAGE 1 OF 1

REPLACES

RELEASE NO. SR10752

ISSUE

7**M**

REVISIONS

A	C080986
	JALA
	26 JUN 95
B	203155
	C.S.L.
	25 MAY 01

CHECK

CHECK

31 JAN 63

GCH


CHECK

31 JAN 63

MBF

RASTER

DRAWN

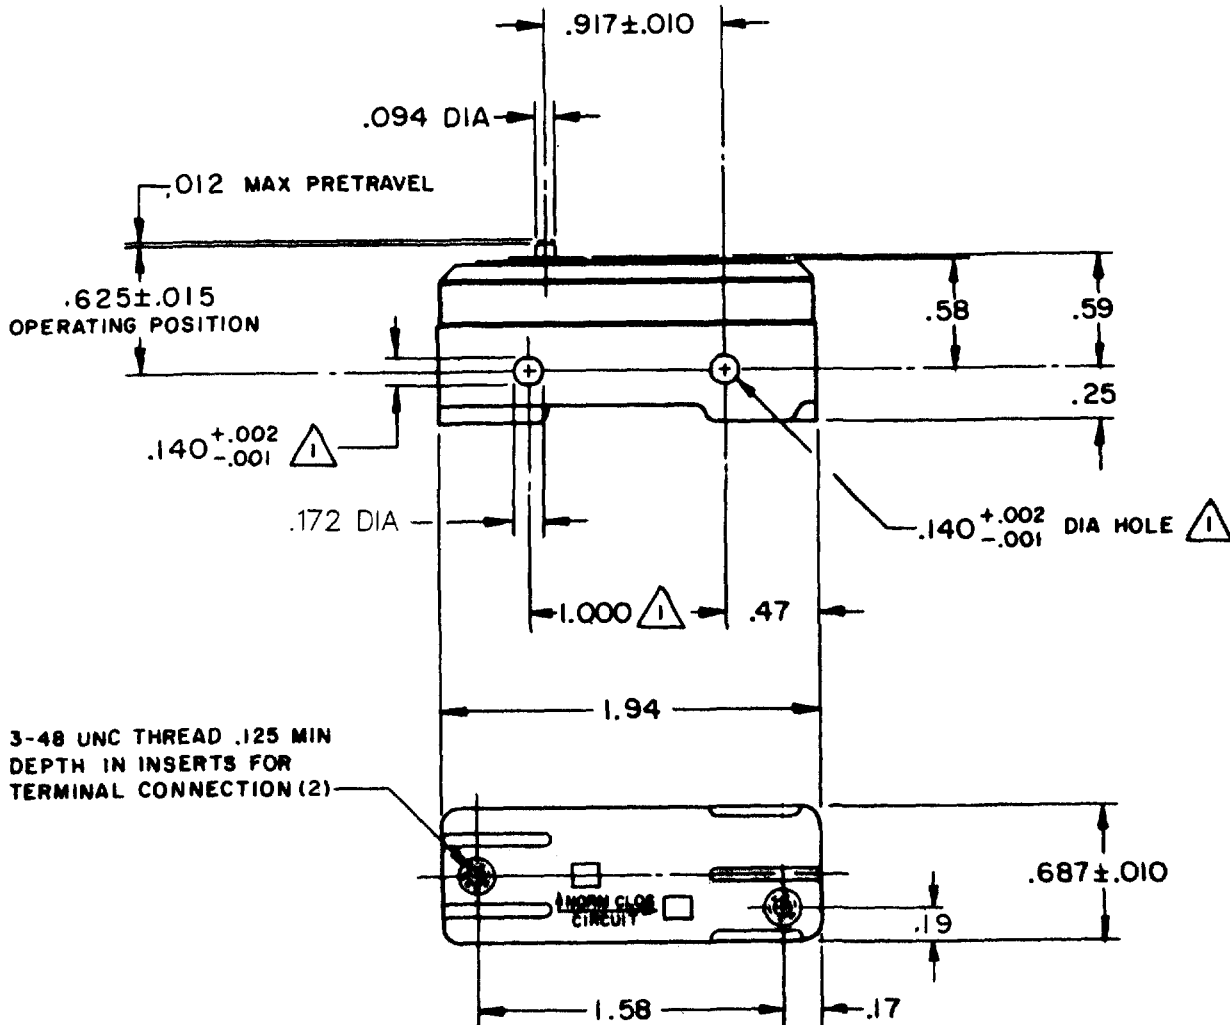

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — — 7 - 9 OZ

RELEASE FORCE — — — — — 4 OZ MIN

DIFFERENTIAL TRAVEL — .0003 - .0006

OVERTRAVEL — — — — — .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P N CL103 15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VACL288
L299
L30616A 250V $\sim$ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT .050 LB

WZ-R141

M

**DRAWING
NUMBER**

ISSUE

REVISIONS

A	C080986
JALA	
26 JUN 95	

REPLACES

SR 10752

RELEASE NO.

CHECK

CHECK


31 JAN 63

H 33

CHECK

31 JAN 63

384

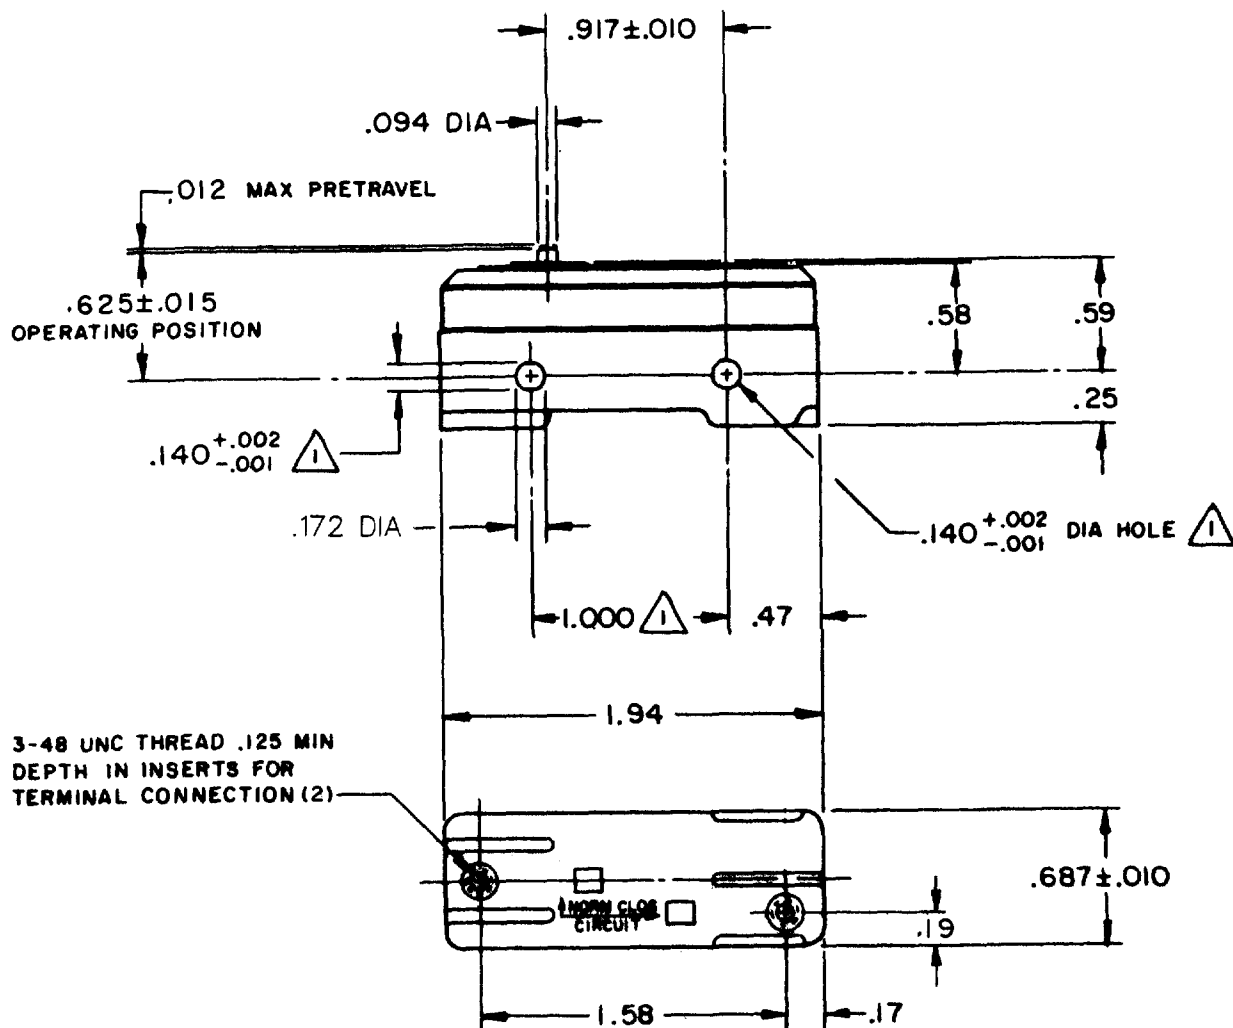

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS

2 - 3-48 UNC X .125 REF TERMINAL SCREW FURNISHED UNASSEMBLED (2)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	
OPERATING FORCE — — — — 7 - 9 OZ		CONTACT ARRANGEMENT S P N C		DO NOT SCALE PRINT	
RELEASE FORCE — — — — — 4 OZ MIN		UNDERWRITERS' LAB. INC. LISTED RATING 15 A-125, 250 OR 480 VAC -L103- 1/8 HP-125 VAC; 1/4 HP-250 VAC 		UNLESS OTHERWISE SPECIFIED	
DIFFERENTIAL TRAVEL — ,0003 — ,0006				DIMENSIONS ARE IN INCHES	
OVERTRAVEL — — — — — ,005 MIN				TOLERANCES ARE:	
				ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±	
				WEIGHT .050 LB	