

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

YA-2RV196-D63

ADQ7975

CATALOG LISTING
YA-2RV196-D63
PAGE 1 OF 1

M

DRAWING
NUMBER

6

ISSUE

REPLACES X73321-YA

RELEASE NO. PR-10901

CHECK

REVISIONS

A	CO-77588	17 FEB 06
	KDR	29 MAR 94
B	CO-80938	
	DLT	9 JUN 95
C	C093346	
	DLT	27 AUG 98
D	0000763	
	CSL	2 JUL 03
E	0018388	
	TGP	17 FEB 06

RJ

CHECK

4 FEB 02

4 FEB 02

4 FEB 02

4 FEB 02


4 FEB 02

4 FEB 02

4 FEB 02

4 FEB 02

4 FEB 02

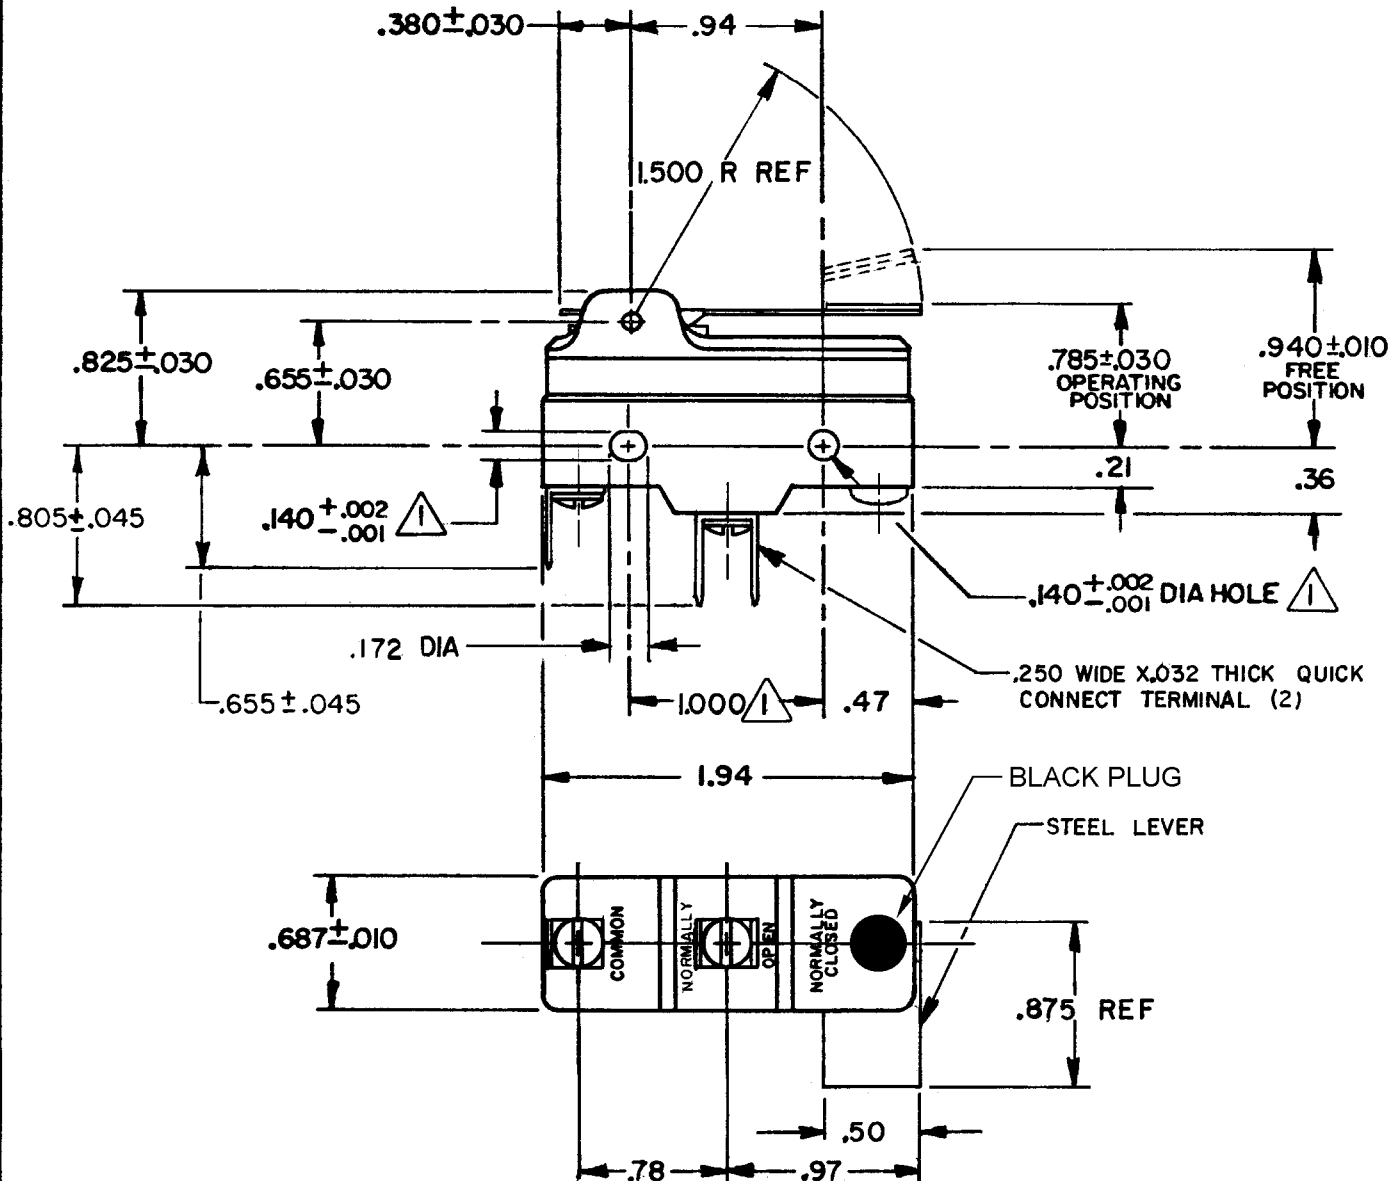


NOTES

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
- FREE POSITION MEASURED WITH SWITCH INVERTED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE- - - - 3 OZ MAX
RELEASE FORCE- - - - 1/2 OZ MIN
DIFFERENTIAL TRAVEL- - - .075 MAX
OVERTRAVEL- - - - .090 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

20A-125, 250 OR 480 VAC; 10A-125 VAC "L"
1HP-125 VAC; 2HP-250 VAC
CODE L23 1/2A-125 VDC; 1/4A-250 VDC
L288
L308
L315

CE
20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED TOLERANCES ARE ±

	DIM.	TOL.	DIM.	TOL.
	IN	MM/IN	IN	MM/IN
NO PLACES	X	1/32	X X	0.01/05
ONE PLACE	X.X	0.001/0.01	X.XX	0.001/0.01
TWO PLACES	X.XX	0.001/0.01	X.XXX	0.001/0.01
THREE PLACES	X.XXX	0.001/0.01		
ANGLES				

BY METRIC

US CUSTOMARY

DESIGN UNITS ☐

☒

WEIGHT

RASTER

FO-32848-A

DRAWN

CHECK

26 JAN 82

26 JAN 82

26 JAN 82

26 JAN 82