


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

YE-2RV22-D5

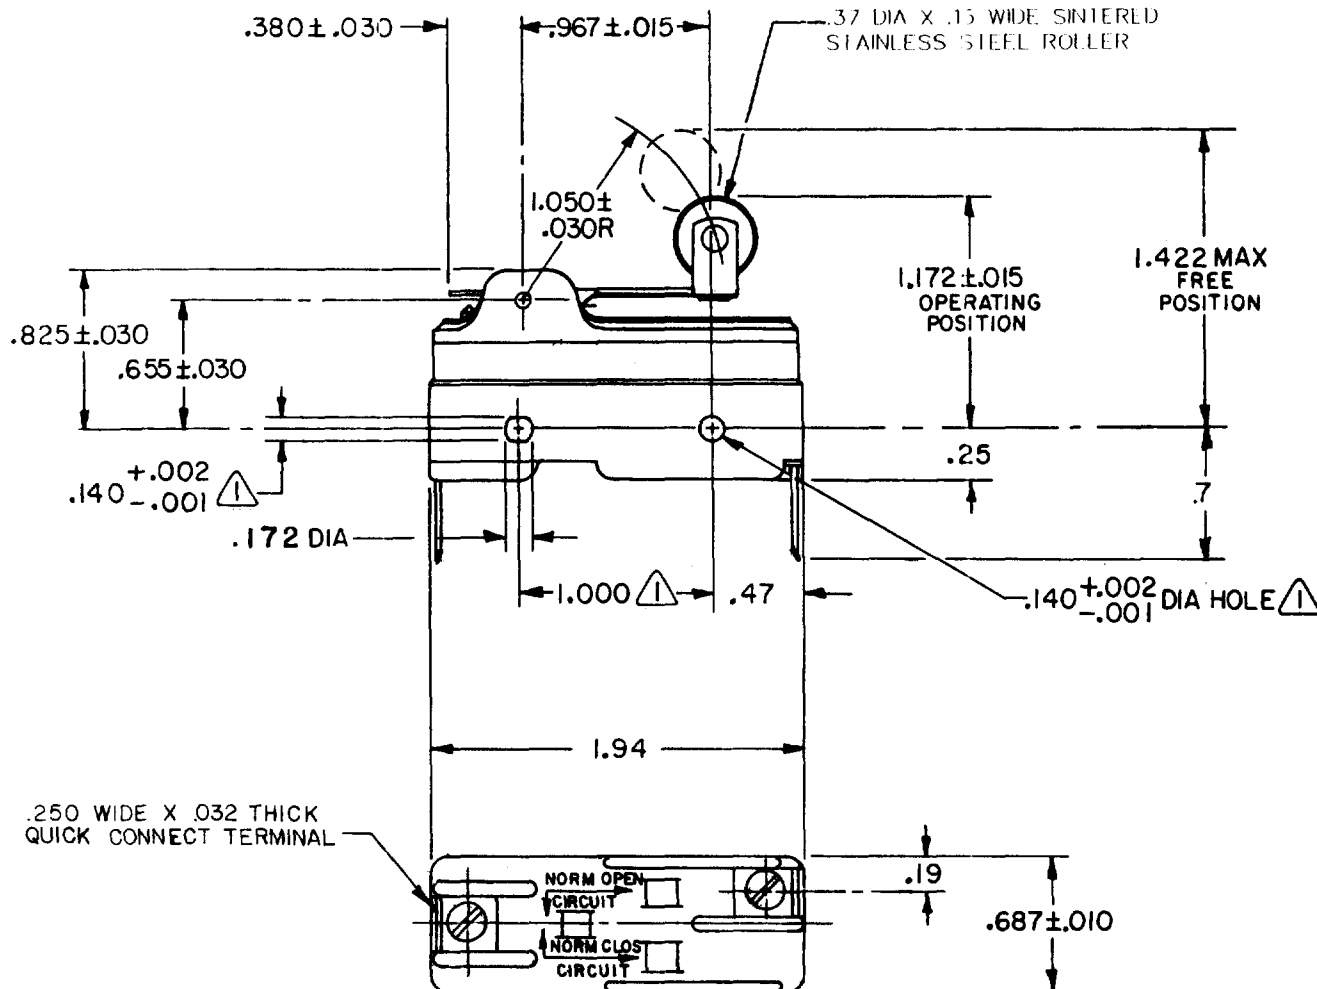

NOTE

1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE-----6 OZ MAX
RELEASE FORCE-----1 1/2 OZ MIN
PRETRAVEL-----.250 MAX
DIFFERENTIAL TRAVEL-----.045 MAX
OVERTRAVEL-----.030 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

25A 125, 250 480 VAC
1 HP 125 VAC, 2 HP 250 OR 480 VAC
PILOT DUTY
750 VA 480 VAC, MAX
60/75°C (Cu)

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	X X
ONE PLACE	X, X	0.4/0.016	X X X
TWO PLACES	X, XX	0.16/0.008	X X X
THREE PLACES	X, XXX	0.38/0.015	X, XXX
ANGLES		0.13/0.005	

DESIGN UNITS ☐ SYMETRIC ☐ US CUSTOMARY ☒

WEIGHT .060 LB

DRAWING NUMBER
YE-2RV22-D5

PAGE 1 OF 1

ISSUE
7

CHECK

REVISIONS

A CO 58782
WJM
25 JAN 86

B CO 70184-G
G J W
9 MAR 92

C CO-72387
JJO
1 MAY 92

D CO-75204B
DAW
1 FEB 94

E CO77590
DLV
10 JUN 94

F CO-94212-H
JJA
1 OCT 99

CHECK

9 NOV 83

9 NOV 83

9 NOV 83

9 NOV 83

9 NOV 83

9 NOV 83

FORMTEK

FO-52848-A

DRAWN

REPLACES

RELEASE NO. PR-12557

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK