



MICRO SWITCH
 a Honeywell Division
 FED.MFG.CODE 91929

SWITCH — BASIC

CATALOG LISTING
YM-1R2450

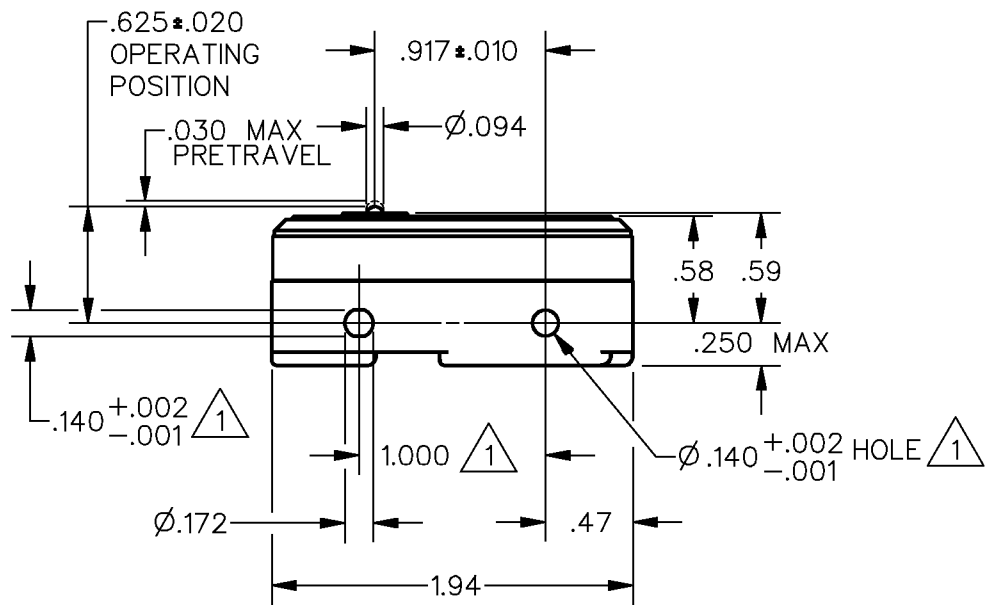

2X 4-40 UNS THREAD
 (MOD. PITCH Ø.0930-
 .0991) ∇ .157 MIN IN
 INSERTS FOR TER-
 MINAL CONNECTIONS
 (COMMON AND
 NORMALLY OPEN)

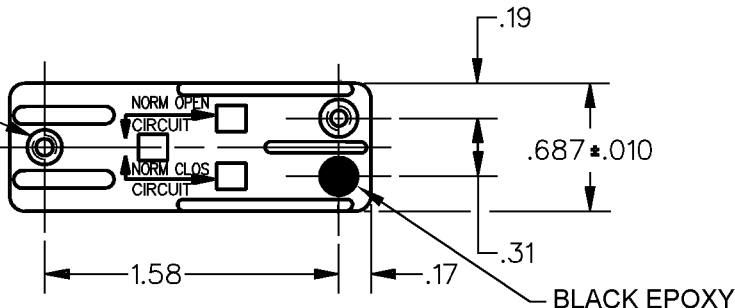

NOTE
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF Ø.139 MAX ON 1.000±.002 CENTERS
 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — 11-22 OZ	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
DIFFERENTIAL FORCE — — — .5-2.5 OZ	L316		
RELEASE FORCE — — — — 9 OZ MIN	15A 480 VAC	ONE PLACE (.)	±.030
DIFFERENTIAL TRAVEL — — .0002-.0008	22A 125, 277 VAC	TWO PLACE (.00)	±.015
OVERTRAVEL — — — — .010 MIN	1/4HP 125 VAC, 1/2HP 250 VAC	THREE PLACE (.000)	±.005
	L288 L310 L315 L318	ANGLES	±
	22A 250V ~ T85 5E4	WEIGHT	.050 LB

