

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

19221-0403

Status:


Active

Overview:

Battery Cable Lugs

Description:

Compression Style Ring Tongue Terminal for 4/0 AWG Wire, Stud Size 1/2" (M12), Un-Plated, Barrel Length 19.05mm

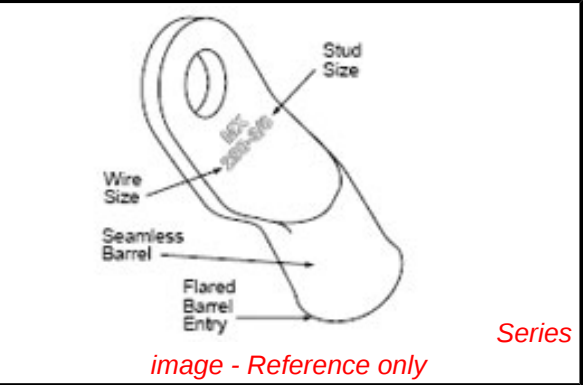

Documents:

Drawing (PDF)

Product Specification PS-19902-011 (PDF)

Product Specification PS-19902-013 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR18689
UL	E32244
General	
Product Family	Ring and Spade Terminals
Series	19221
Comments	Heavy Duty
Crimp Quality Equipment	Yes
Mil-Spec	N/A
Overview	Battery Cable Lugs
Product Name	Battery Cable Lug
Type	Ring
UPC	800753064874
Physical	
Barrel Type	Closed
Insulation	None
Material - Plating Mating	Tin
Net Weight	37.703/g
Packaging Type	Bag
Stud Size	1/2" (M12)
Termination Interface: Style	Crimp or Compression
Wire Size AWG	4/0
Wire Size mm²	96.3 - 117.0
Material Info	
Old Part Number	BCL-4012
Reference - Drawing Numbers	
Product Specification	PS-19902-011, PS-19902-013
Sales Drawing	SD-19221-011

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

19221Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool	0192840034
Putt Pump Dieless Head System	0192860065
Manual Putt Pump Hydraulic System, Die set required	0192860117
Die Set (large) for the HHLS Hydraulic Crimper	0192900031
Manual tool for Crimping non-insulated 8AWG thru 4/0 Terminals	0192940008

This document was generated on 10/22/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION