


M22 Connectors

Female Crimp Housings and Contacts

- Suitable for use with male connectors shown on pages 129 to 134.
- Twin-leaf phosphor bronze contacts, supplied loose or on reels, rear insertable into housing.
- For polarising key use **order code M22-0340000**.

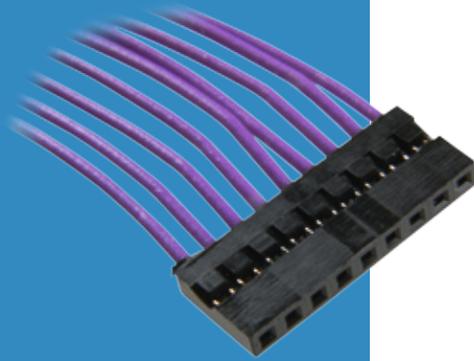

2mm (.079") PITCH

SINGLE ROW	CALCULATION	DOUBLE ROW	CALCULATION
	A B + 2.30		A B + 2.20
	B 2.00 x (No. of contacts per row - 1)		B 2.00 x (No. of contacts per row - 1)

CONTACTS	HAND CRIMP TOOL
<ul style="list-style-type: none"> ➤ Order codes for reeled contacts refer to one reel of 10,000 contacts. ➤ Order codes for loose contacts refer to one pack of 100 contacts. 	
<div style="background-color: #0056b3; color: white; padding: 5px; text-align: center;">WIRE STRIPPING DETAILS</div>	<div style="background-color: #0056b3; color: white; padding: 5px; text-align: center;">ORDER CODE</div> <div style="background-color: #e6e6fa; padding: 5px; text-align: center;">Z22-020</div> <p>➤ Instruction sheets available at www.harwin.com/downloads/instructions</p>

HOW TO ORDER

M22 - 30 X XX XX

SERIES CODE	
TYPE	
1	Single Row Housing
2	Double Row Housing
4	Reeled Contacts
5	Loose Contacts

NO. OF CONTACTS PER ROW	
02 to 30	Single Row Housing
02 to 40	Double Row Housing
00	Contacts

FINISH	
00	Housings
42	Gold + Tin (Contacts)
46	Tin (Contacts)

All dimensions in mm.