


## Male Crimp

- ❑ Mates with female connectors shown on pages 38, 39, 41, 42, 44 and 46 to 50.
- ❑ Jackscrews are assembled where specified.
- ❑ Crimp contacts supplied loose.
- ❑ Crimp contacts are rear insertable and replaceable.
- ❑ Large Bore 22 AWG, Small Bore 24 - 28 AWG.
- ❑ Part numbers are for housings and the equivalent no. of contacts.
- ❑ Spare contacts are available - see page 65.

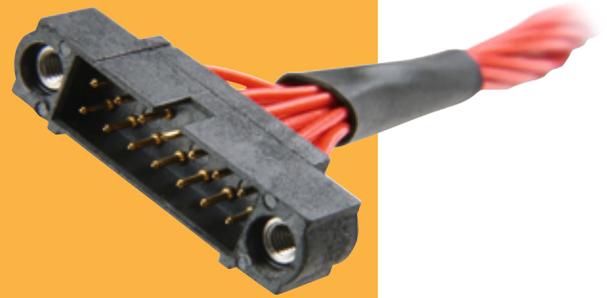

DATAMATE J-TEK

WITHOUT JACKSCREWS	WITH JACKSCREWS														
<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">CALCULATION</th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;"><b>A</b></td> <td>B + 12</td> </tr> <tr> <td style="background-color: #f4a460;"><b>B</b></td> <td>Total no. of contacts - 2</td> </tr> <tr> <td style="background-color: #f4a460;"><b>C</b></td> <td>B + 7</td> </tr> </tbody> </table>		CALCULATION		<b>A</b>	B + 12	<b>B</b>	Total no. of contacts - 2	<b>C</b>	B + 7						
CALCULATION															
<b>A</b>	B + 12														
<b>B</b>	Total no. of contacts - 2														
<b>C</b>	B + 7														
TOOLS	WIRE STRIPPING DETAILS														
<p><b>Recommended Crimp Tool</b> - M22520/2-01  <b>Positioner</b> - Z80-193  <b>Contact Insertion/Removal Tool</b> - Z80-280                      See pages 87 to 89                      ❑ Instruction sheets available at <a href="http://www.harwin.com/downloads/instructions">www.harwin.com/downloads/instructions</a></p>															
HOW TO ORDER															
<h3>M80 - XXX XX 05</h3>															
<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">SERIES CODE</th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">560</td> <td>Large Bore, with Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">561</td> <td>Small Bore, with Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">570</td> <td>Large Bore, without Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">571</td> <td>Small Bore, without Jackscrews</td> </tr> </tbody> </table>	SERIES CODE		560	Large Bore, with Jackscrews	561	Small Bore, with Jackscrews	570	Large Bore, without Jackscrews	571	Small Bore, without Jackscrews	<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">05</td> <td>Gold </td> </tr> </tbody> </table>	FINISH		05	Gold
SERIES CODE															
560	Large Bore, with Jackscrews														
561	Small Bore, with Jackscrews														
570	Large Bore, without Jackscrews														
571	Small Bore, without Jackscrews														
FINISH															
05	Gold														
<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="background-color: #f4a460;">04 to 50</td> </tr> </tbody> </table> <p style="font-size: small;">Even numbers only</p>		TOTAL NO. OF CONTACTS		04 to 50											
TOTAL NO. OF CONTACTS															
04 to 50															

All dimensions in mm.