



MATERIAL NO.	ENGINEERING NO.
1302990400	130299-0400





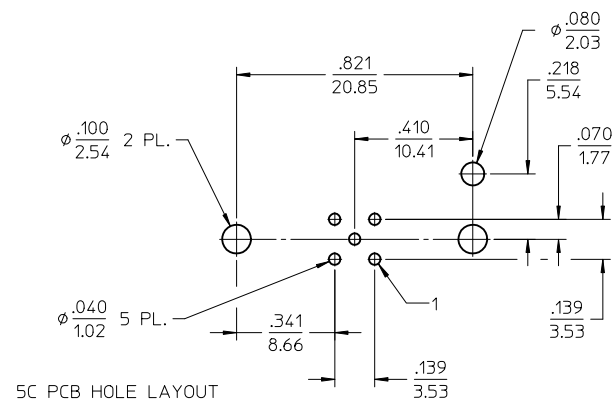


5C PCB HOLE LAYOUT
(COMPONENT SIDE)

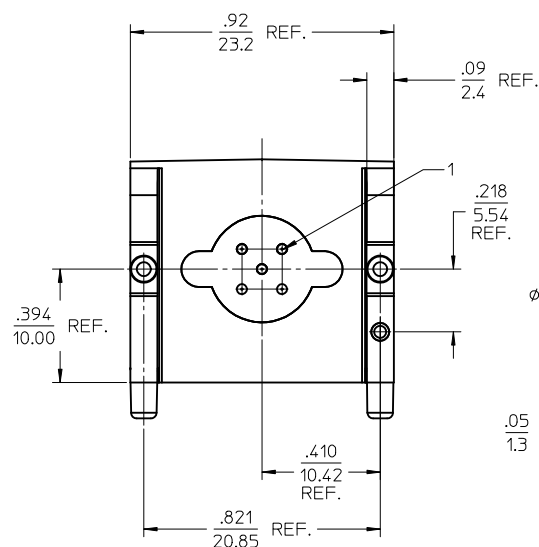

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPEC: PS-130299-001
4. PACKAGING: PK-130299-001
5. MATES WITH: MALE A-CODE CABLE ASSEMBLY
6. ELECTRICAL SPECS:
VOLTAGE: 250V AC/DC
CURRENT: 4 AMPS
7. PROTECTION: IP67
8. ASSEMBLY IS RoHS COMPLIANT

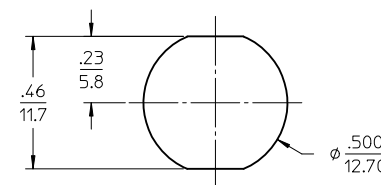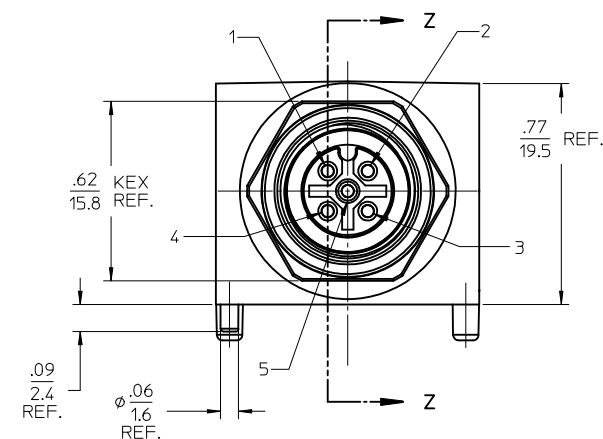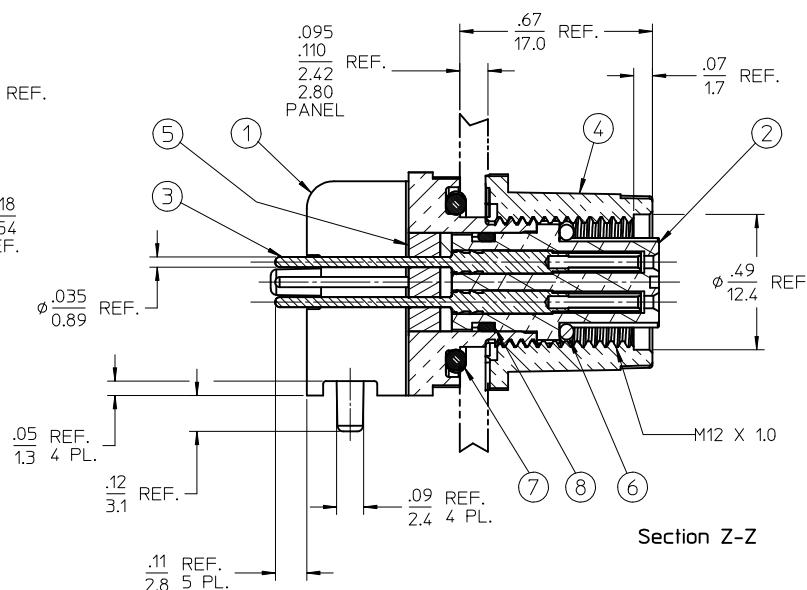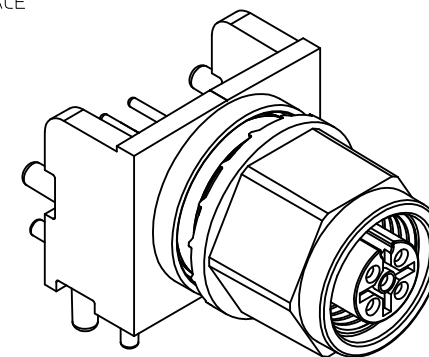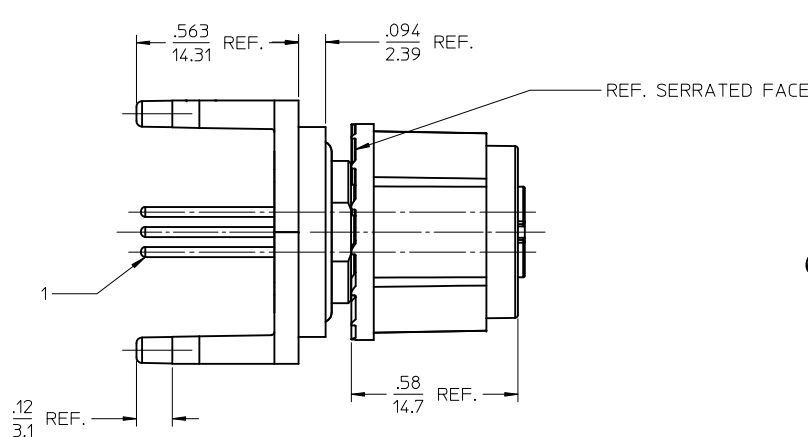

MOUNTING HOLE LAYOUT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	INSULATOR O-RING	VITON	BROWN
7	1	PANEL O-RING	VITON	RED
6	1	MATING O-RING	VITON	RED
5	A/R	POTTING COMPOUND	EPOXY	RED
4	1	PANEL NUT	ZINC (DIE-CAST)	CHROME/DUPLEX NICKEL
3	4	CONTACT SOCKET, STRAIGHT	BRASS	GOLD PLATED
2	1	5/C A-CODE INSULATOR	PUR	BLACK
1	1	RECEPTACLE SHELL, M12	ZINC (DIE-CAST)	WHITE BRONZE PLATING

REV	DESCRIPTION
1	REMOVED CUST SIGN-OFF
2	EC NO: WNA2011-0198
3	DRWN:RSTONE 2010/10/15
4	CHKD:K. JOZWIK 2010/10/21
5	APPR:JFMURPHY 2010/12/14

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	mm INCH
▽=0	4 PLACES ± .005 ± .005
	3 PLACES ± .005 ± .005
	2 PLACES ± .013 ± .010
	1 PLACE ± .03 ± .010
	ANGULAR ± 2 °
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS
IN/MM	3:1	INCH
DRAWN BY	DATE	TITLE
RSTONE	2010/05/17	MIC PCB RECEPTACLE 5C, A-CODE, STRAIGHT
CHECKED BY	DATE	
K. JOZWIK	2010/05/25	
APPROVED BY	DATE	
JFMURPHY	2010/05/20	

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE CHART	SD-130299-008	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		