
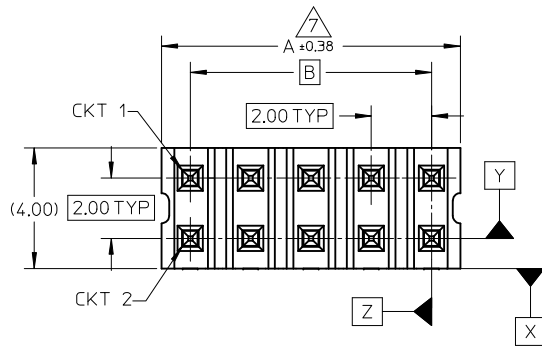
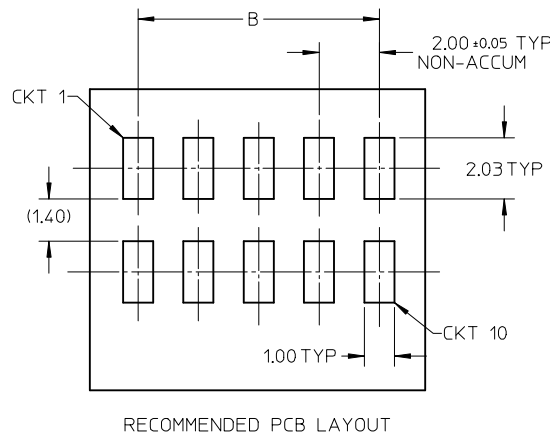
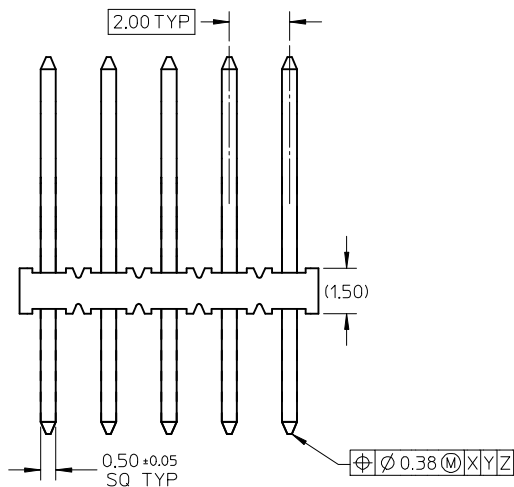


NOTES

- MATERIAL:
HSG: NYLON, GLASS-FILLED, UL94V-0 COLOR: BLACK
PIN: 0.50MM SQ, COPPER ALLOY
- PLATING TYPE:
(1) GOLD FLASH OVER
1.270µm MIN, NICKEL OVERALL.
(2) GOLD FLASH ON CONTACT AND
1.905µm MIN, TIN ON SOLDER TAIL OVER
1.270µm MIN, NICKEL OVERALL.
(3) 0.254µm MIN. GOLD PLATE ON CONTACT AND
1.905µm MIN, TIN ON SOLDER TAIL OVER
1.270µm MIN, NICKEL OVERALL.
(4) 0.381µm MIN. GOLD PLATE ON CONTACT AND
1.905µm MIN, TIN ON SOLDER TAIL OVER
1.270µm MIN, NICKEL OVERALL.
(5) 0.762µm MIN. GOLD PLATE ON CONTACT AND
1.905µm MIN, TIN ON SOLDER TAIL OVER
1.270µm MIN, NICKEL OVERALL.
(6) 2.540µm MIN. TIN OVERALL
1.270µm MIN, NICKEL OVERALL
- PRODUCT SPECIFICATION: PS-87761-100
- PACKAGING TYPE: SEE TABLE
- WAFER TO BE FLAT WITHIN 0.003 mm/mm
- COPLANARITY IS TO BE MEASURED BY RESTING THE SOLDER TAIL ON A GAUGE SURFACE
- IRREGULAR CIRCUIT CUTOFF WITHIN BREAKAWAY SECTION IS PERMISSIBLE. CUTTING OR CHIPPING OF THE MAIN BODY IS NOT ACCEPTABLE
- RECOMMENDED PCB THICKNESS IS 1.60mm±0.10
- THE ABOVE CKT 10 IS FOR ILLUSTRATION PURPOSE ONLY
- PACKAGING SPECIFICATION:
TRAY: PK-89990-487
T&R : PK-89990-484


CHANGE KAPTON TAPE SIZE			QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
EC NO: S2013-0833 2013/05/28 DRW:ATSEE 2013/08/20 CHKD:SKANG 2013/08/22 APPR:MLONG			DESCRIPTION	F _A =0	4 PLACES	± ---	± ---	DRAWN BY KCHO	DATE 2005/01/31	TITLE CUSTOM HEADER MGRID DUAL ROW HEADER S/WFR, HORIZONTAL SMT		
			F _C =0	3 PLACES	± ---	± ---	CHECKED BY	DATE				
			F _P =0	2 PLACES	± 0.20	± ---	PTLIM	2005/02/17				
				1 PLACE	± ---	± ---	APPROVED BY	DATE	SCLOW	2005/02/17	MOLEX	MOLEX INCORPORATED
A7			REV									

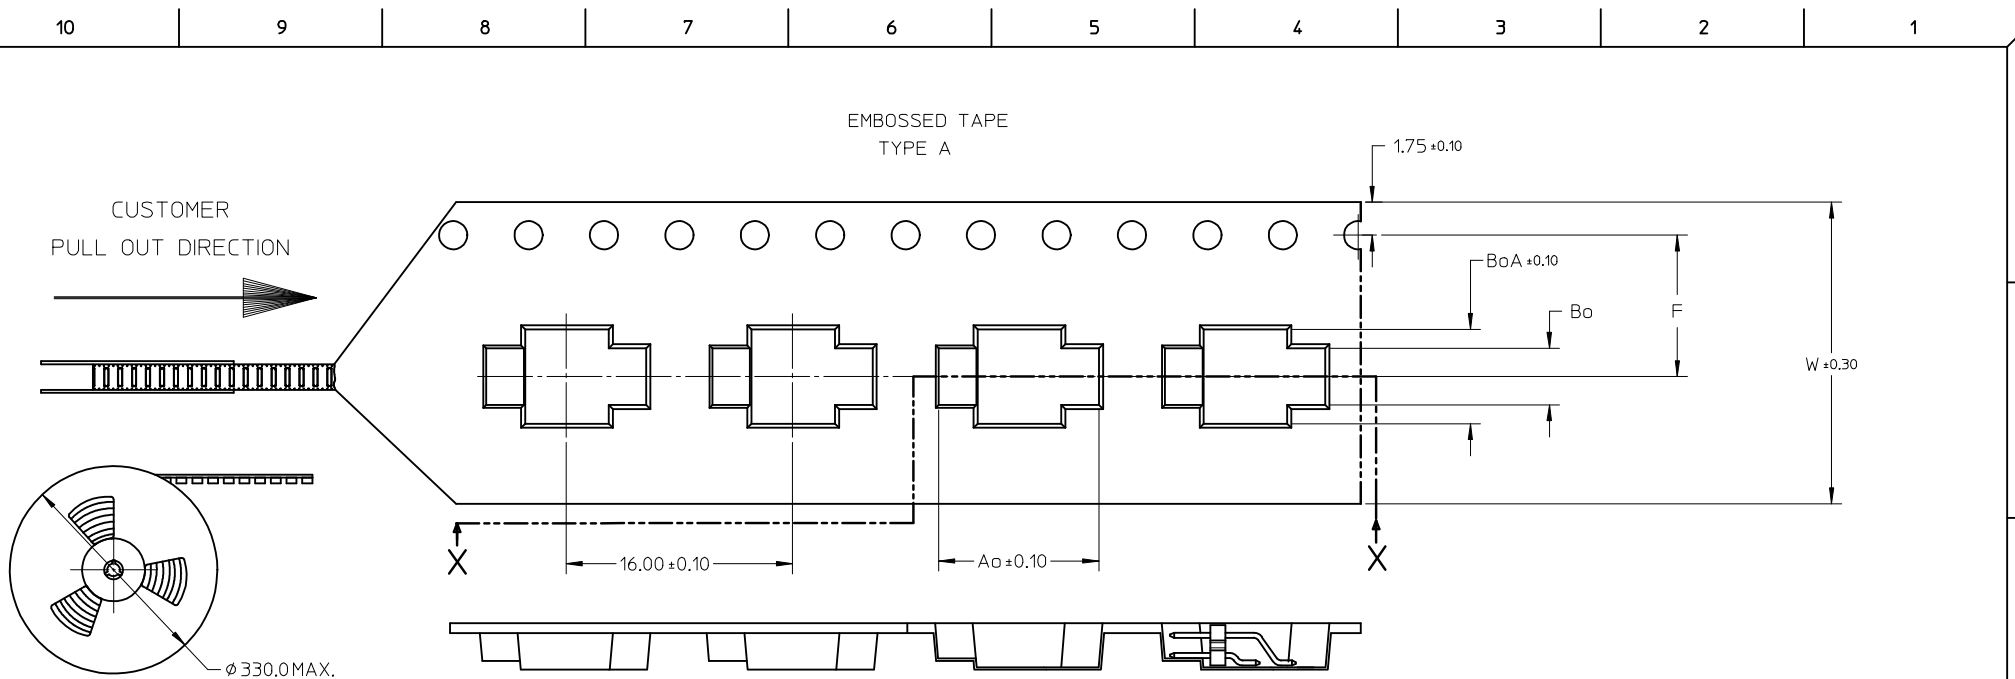


SECTION X-X PART IN T&R FOR ILLUSTRATION ONLY

NOTES:

1. LEADER AND TRAILER TAPE

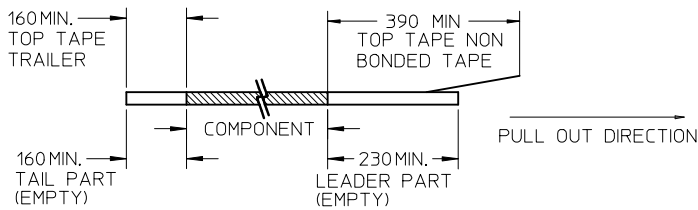

2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)





3. PACKAGING STANDARD IS AS PER EIA-481.

△ KAPTON TAPE SHOULD BE LOCATED AS CENTRAL OF PART AS POSSIBLE.

5. TAPE & REEL QUANTITY : 900 PCS/ REEL.

EMBOSSED TAPE TYPE B

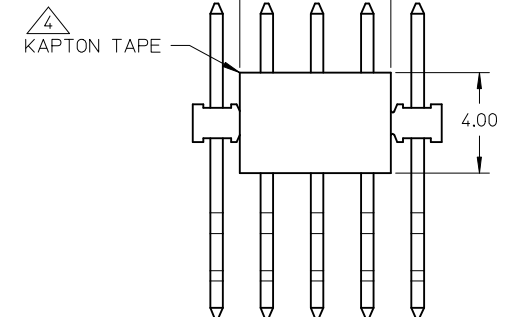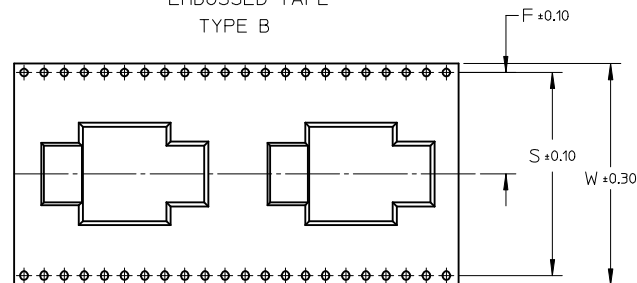

PART WITH KAPTON TAPE 10CKT SHOWN FOR ILLUSTRATION ONLY

CHANGE KAPTON TAPE SIZE EC NO: S2013-0833 DRWN:ATSEE CHKD:SKANG APPR:MLONG A7	2013/05/28 2013/08/20 2013/08/22	DESCRIPTION	QUALITY SYMBOLS F_A=0 F_B=0 F_C=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION					
				4 PLACES	± mm	± INCH	DRAWN BY KCHO	DATE 2005/01/31	TITLE CUSTOM HEADER MGRID DUAL ROW HEADER S/WFR, HORIZONTAL SMT						
					3 PLACES	± ---	± ---	CHECKED BY PTL IM				DATE 2005/02/17			
					2 PLACES	± 0.20	± ---	APPROVED BY SCLOW				DATE 2005/02/17	 MOLEX INCORPORATED		
					1 PLACE	± ---	± ---	MATERIAL NO.				DOCUMENT NO.		SHEET NO. 2 OF 3	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE TABLE			SD-87979-002				
								SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10										9				8			7		6		5		4		3		2		1	
F	PART NO.	CKT SIZE	PEG	PLATE OPT.	VOID POSITION	DIMENSION			WITH KAPTON TAPE	PACKAGING OPTION	Bo	BoA	Ao	F	S	W	EMBOSSSED TAPE TYPE													
								MATING END																						
						A	B	M																						
	87979-0406	4	N	6	----	4.00	2.00	4.00	NO	TRAY	-	-	-	-	-	-	-													
	87979-0806	8	N	6	----	8.00	6.00	4.00	YES	T&R	7.00	9.00	13.00	11.50	-	24.00	A													
	87979-1006	10	N	6	----	10.00	8.00	4.00	NO	TRAY	-	-	-	-	-	-	-													
	87979-1206	12	N	2	----	12.00	10.00	4.00	YES	T&R	11.00	13.00	13.00	11.50	-	24.00	A													
	87979-1606	16	N	6	----	16.00	14.00	4.00	NO	TRAY	-	-	-	-	-	-	-													
E	87979-1607	16	N	6	----	16.00	14.00	4.00	YES	T&R	14.80	16.40	13.10	11.50	-	24.00	A													
	87979-2406	24	N	2	----	24.00	22.00	4.00	YES	T&R	23.00	25.00	13.00	20.20	40.40	44.00	B													
	87979-4206	42	N	6	----	42.00	40.00	4.00	YES	T&R	41.00	43.00	13.00	26.20	52.40	56.00	B													
	87979-5006	50	N	6	----	50.00	48.00	4.00	NO	TRAY	-	-	-	-	-	-	-													
D																														
C																														
B																														
A																														
fb_frame_A3_P_AM_T Rev. F 2009/06/18 987654321																														