

90584	-**26	26	(35.53)/1.399	(31.75)/1.250	(30.48)/1.200
	-**24	24	(32.99)/1.299	(29.21)/1.150	(27.94)/1.100
	-**22	22	(30.45)/1.199	(26.67)/1.050	(25.40)/1.000
	-**20	20	(27.91)/1.099	(24.13)/.950	(22.86)/.900
	-**18	18	(25.37)/.999	(21.59)/.850	(20.32)/.800
	-**16	16	(22.83)/.899	(19.05)/.750	(17.78)/.700
	-**14	14	(20.29)/.799	(16.51)/.650	(15.24)/.600
	-**12	12	(17.75)/.699	(13.97)/.550	(12.70)/.500
	-**10	10	(15.21)/.599	(11.43)/.450	(10.16)/.400
	-**08	8	(12.67)/.499	(8.89)/.350	(7.62)/.300
	-**06	6	(10.13)/.399	(6.35)/.250	(5.08)/.200
90584	-**04	4	(7.59)/.299	(3.81)/.150	(2.54)/.100
PART NO.	CCT SIZE		DIMENSION A	DIMENSION B	DIMENSION C

HOUSING

MATL. POLYESTER, RATED UL 94V-0, COLOUR WHITE.

IDT CONTACT

MATL : PHOSPHOR BRONZE (0.28)/.011 REF THICK.

PLATING : (2-4um) / 80-160u" TIN

NOTES:

1. APPL. CLASS TO DIN 40040 HME (-25°C/+100°C)

2. PRODUCT SPECIFICATION: PS-99020-0011

3. WIRE TERMINATION SPEC: ES-99033-0002

4. PACKAGING SPEC: PK-90584-001

90584- * * * *

04 TO 26 = CKT SIZE.



3= NO CIRCUITS VOIDED.

4= CIRCUITS 4 & 5 VOIDED.

1= INDIVIDUAL TUBED ASSY

2= STACKED TUBED ASSY - SEE SHEET 2

9= NON STANDARD OPTION - SEE SHEET 3

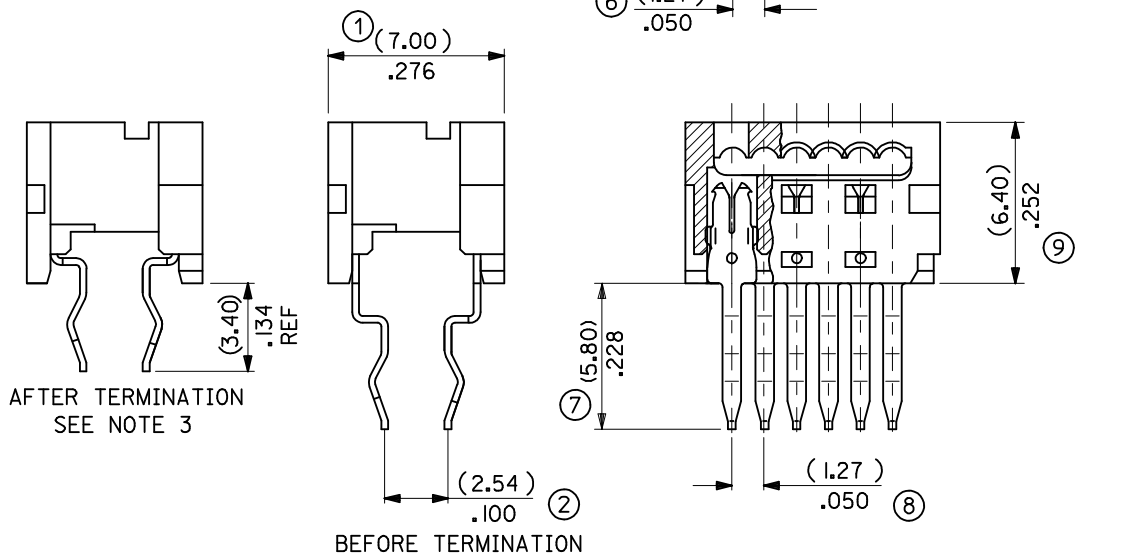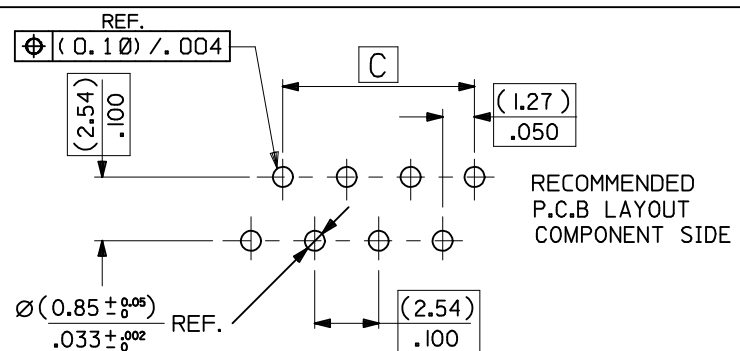

ADDED PACKAGING NOTE:

EC NO: IPG2013-2038

DRWN: JBYRNE 2013/06/26

CHKD: SUEA 2013/06/27

APPR: STGRFF IN 2013/07/16

REV

DESCRIPTION

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± .010

2 PLACES ± 0.25 ± ---

1 PLACE ± --- ± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SIZE

A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAWN BY

DATE

2003/09/01

CHECKED BY

DATE

2003/09/01

APPROVED BY

DATE

2003/09/01

MATERIAL NO.

DOCUMENT NO.

SDA-90584

SHEET NO.

1 OF 3

MOLEX INCORPORATED

1.27MM PF LOW PRO IDT BOARD-IN CONNECTOR

THIRD ANGLE PROJECTION

SCALE

5:1

DESIGN UNITS

METRIC

MM/IN

DATE

2003/09/01

DATE

2003/09/01

90584	***26	26	(35.53)/1.399	(31.75)/1.250	(30.48)/1.200
	***24	24	(32.99)/1.299	(29.21)/1.150	(27.94)/1.100
	***22	22	(30.45)/1.199	(26.67)/1.050	(25.40)/1.000
	***20	20	(27.91)/1.099	(24.13)/.950	(22.86)/.900
	***18	18	(25.37)/.999	(21.59)/.850	(20.32)/.800
	***16	16	(22.83)/.899	(19.05)/.750	(17.78)/.700
	***14	14	(20.29)/.799	(16.51)/.650	(15.24)/.600
	***12	12	(17.75)/.699	(13.97)/.550	(12.70)/.500
	***10	10	(15.21)/.599	(11.43)/.450	(10.16)/.400
	***08	8	(12.67)/.499	(8.89)/.350	(7.62)/.300
	***06	6	(10.13)/.399	(6.35)/.250	(5.08)/.200
90584	***04	4	(7.59)/.299	(3.81)/.150	(2.54)/.100
PART NO.	CCT SIZE		DIMENSION A	DIMENSION B	DIMENSION C

HOUSING

MATL. POLYESTER, RATED UL 94V-0, COLOUR WHITE.

IDT CONTACT

MATL : PHOSPHOR BRONZE (0.28)/.011 REF THICK.

PLATING : (2-4um) / 80-160u" TIN

NOTES:

1. APPL. CLASS TO DIN 40040 HME (-25°C/+100°C)

2. PRODUCT SPECIFICATION: PS-99020-0011

3. WIRE TERMINATION SPEC: ES-99033-0002

4. PACKAGING SPEC: PK-90584-001

90584- * * * *

04 TO 26 = CKT SIZE.



3= NO CIRCUITS VOIDED.

4= CIRCUITS 4 & 5 VOIDED.

1= INDIVIDUAL TUBED ASSY

2= STACKED TUBED ASSY - SEE SHEET 2

9= NON STANDARD OPTION - SEE SHEET 3

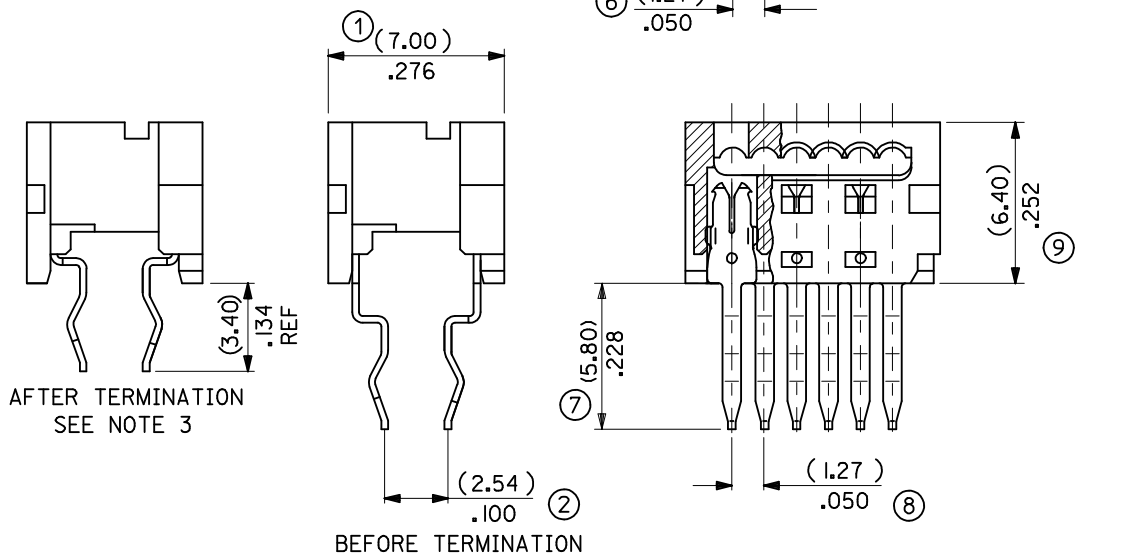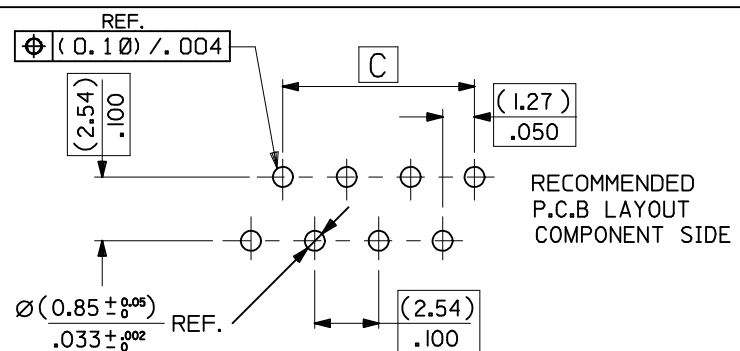

ADDED PACKAGING NOTE:

EC NO: IPG2013-2038

DRWN: JBYRNE 2013/06/26

CHKD: SUEA 2013/06/27

APPR: STGRFF IN 2013/07/16

REV

DESCRIPTION

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± .010

2 PLACES ± 0.25 ± ---

1 PLACE ± --- ± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE

MUST REMAIN

WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY

DATE

TITLE

CHECKED BY

DATE

APPROVED BY

DATE

MATERIAL NO.

DOCUMENT NO.

SHEET NO.

1 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SEE CHART

SDA-90584

MOLEX INCORPORATED

THIRD ANGLE PROJECTION

SCALE

5:1

DESIGN UNITS

METRIC

1.27MM PF LOW PRO IDT BOARD-IN CONNECTOR

MOLEX

MOLEX INCORPORATED

THIRD ANGLE PROJECTION

	10	9	8	7	6	5	4	3	2	1																																																				
F											F																																																			
E	<table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>90584 -9001</td><td>26</td><td>(35.53)/ 1.399</td><td>(31.75)/ 1.250</td><td>(30.48)/ 1.200</td><td>12, 13, 14, 15</td><td>14</td><td>98</td><td>7</td></tr><tr><td>PART NO.</td><td>CCT SIZE</td><td>DIMENSION A</td><td>DIMENSION B</td><td>DIMENSION C</td><td>VOIDED POSITIONS</td><td>TUBE QTY</td><td>STACK QTY</td><td>TUBES PER STACK</td></tr></table>																				90584 -9001	26	(35.53)/ 1.399	(31.75)/ 1.250	(30.48)/ 1.200	12, 13, 14, 15	14	98	7	PART NO.	CCT SIZE	DIMENSION A	DIMENSION B	DIMENSION C	VOIDED POSITIONS	TUBE QTY	STACK QTY	TUBES PER STACK	E																							
90584 -9001	26	(35.53)/ 1.399	(31.75)/ 1.250	(30.48)/ 1.200	12, 13, 14, 15	14	98	7																																																						
PART NO.	CCT SIZE	DIMENSION A	DIMENSION B	DIMENSION C	VOIDED POSITIONS	TUBE QTY	STACK QTY	TUBES PER STACK																																																						
D	CCT 1 MX-I 26										D																																																			
C											C																																																			
B	NOTES: 1. SEE SHEET ONE FOR ALL DIMENSIONS AND NOTES NON STANDARD OPTION										B																																																			
A	<table><tr><td rowspan="5">REVISION UPDATE EC NO: E2005-1027 DRAWN:GMSWEEN 2005/05/10 CHKD:DMORIARTY 2005/05/10 APPR: JDENNEHY 2005/05/26</td><td rowspan="5">DESCRIPTION REV</td><td>QUALITY SYMBOLS =0 =0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM/IN</td><td>SCALE 5:1</td><td>DESIGN UNITS METRIC</td><td colspan="2">THIRD ANGLE PROJECTION</td></tr><tr><td rowspan="4">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td>mm</td><td>INCH</td><td>DRAWN BY KD</td><td>DATE 2001/01/31</td><td rowspan="4">TITLE 1.27MM PF LOW PRO IDT BOARD-IN CONNECTOR</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td><td>CHECKED BY DMORIARTY</td><td>DATE 2005/05/06</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .010</td><td>APPROVED BY JDENNEHY</td><td>DATE 2005/05/10</td></tr><tr><td>2 PLACES</td><td>± 0.25</td><td>± ---</td><td>MATERIAL NO.</td><td>DOCUMENT NO. SDA-90584</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td><td colspan="2">SEE CHART</td><td colspan="2">MOLEX INCORPORATED</td><td>SHEET NO. 3 OF 3</td></tr><tr><td colspan="3"></td><td colspan="2">ANGULAR ± 2 °</td><td colspan="2">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td><td colspan="4"></td></tr></table>										REVISION UPDATE EC NO: E2005-1027 DRAWN:GMSWEEN 2005/05/10 CHKD:DMORIARTY 2005/05/10 APPR: JDENNEHY 2005/05/26	DESCRIPTION REV	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	mm	INCH	DRAWN BY KD	DATE 2001/01/31	TITLE 1.27MM PF LOW PRO IDT BOARD-IN CONNECTOR	4 PLACES	± ---	± ---	CHECKED BY DMORIARTY	DATE 2005/05/06	3 PLACES	± ---	± .010	APPROVED BY JDENNEHY	DATE 2005/05/10	2 PLACES	± 0.25	± ---	MATERIAL NO.	DOCUMENT NO. SDA-90584	1 PLACE	± ---	± ---	SEE CHART		MOLEX INCORPORATED		SHEET NO. 3 OF 3				ANGULAR ± 2 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						A
REVISION UPDATE EC NO: E2005-1027 DRAWN:GMSWEEN 2005/05/10 CHKD:DMORIARTY 2005/05/10 APPR: JDENNEHY 2005/05/26	DESCRIPTION REV	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																																					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	mm	INCH	DRAWN BY KD	DATE 2001/01/31	TITLE 1.27MM PF LOW PRO IDT BOARD-IN CONNECTOR																																																							
			4 PLACES	± ---	± ---	CHECKED BY DMORIARTY		DATE 2005/05/06																																																						
			3 PLACES	± ---	± .010	APPROVED BY JDENNEHY		DATE 2005/05/10																																																						
			2 PLACES	± 0.25	± ---	MATERIAL NO.		DOCUMENT NO. SDA-90584																																																						
1 PLACE	± ---	± ---	SEE CHART		MOLEX INCORPORATED		SHEET NO. 3 OF 3																																																							
			ANGULAR ± 2 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																									
	10	9	8	7	6	5	4	3	2	1																																																				

ib_frame_A3_P_ME_T
Rev. D 2004/04/02