




(1,27 mm) .050"

FOLC SERIES

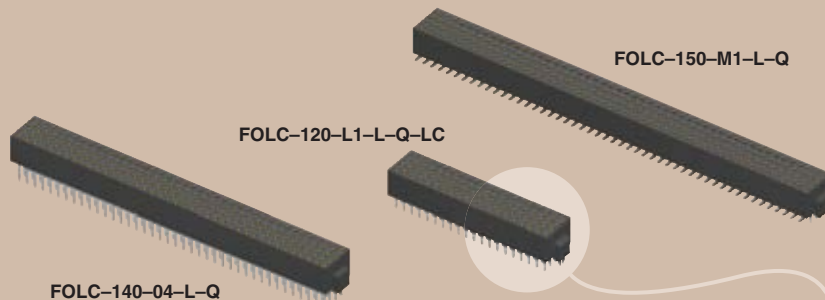

HIGH DENSITY TIGER EYE™ SOCKETS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?FOLC

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

BeCu

Current Rating:

1A/Contact @ 80°C ambient

Operating Temp Range:

-55°C to +125°C

Plating:

Au or Sn over

50µ" (1,27 µm) Ni

Contact Resistance:

15 mΩ

Insertion Depth:

(3,30 mm) .130" to

(4,06 mm) .160"

Insertion Force:

(Single contact only)

Standard= 5.0 oz (1,39 N) avg.

LIF= 2.0 oz (0,56 N) avg.

Normal Force:

Standard= 70 grams

(0,69 N) avg.

LIF= 40 grams (0,39 N) avg.

Withdrawal Force:

(Single contact only)

Standard= 4 oz (1,11 N) avg.

LIF= 1.5 oz (0,42 N) avg.

Max Cycles:

100 with 30µ" (0,76 µm) Au

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,15 mm) .006" max




Mates with:
MOLC

APPLICATION SPECIFIC OPTION

Alignment pins available.
Call Samtec.

Low Insertion Force
contacts available

High reliability
Tiger Eye™
contacts

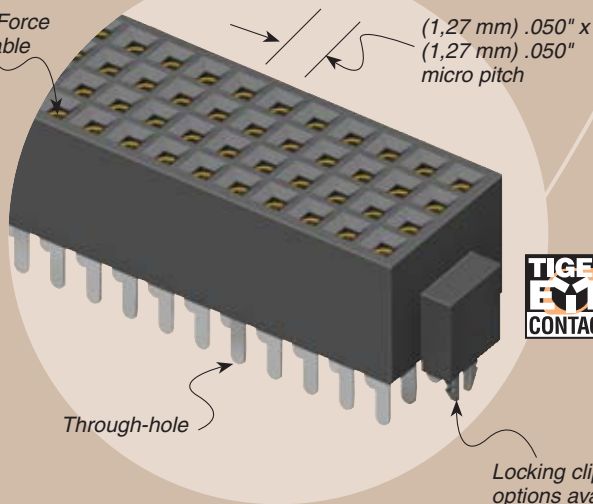

(1,27 mm) .050" x
(1,27 mm) .050"
micro pitch

Through-hole

Locking clip
options available

FOLC

1

NO. PINS
PER ROWLEAD
STYLEPLATING
OPTION

Q

OPTION

20, 25, 30, 35,
40, 45, 50
(Call Samtec for other sizes)

–01 & –04
= Through-Hole

–M1 & –M2
= Mixed Technology

–L1 & –L4
= Low Insertion Force
Through-Hole

–L
= 10µ" (0,25 µm)
Gold on contact,
Matte Tin on tail


–LC
= Locking
Clip
(Manual
placement
required)

ALSO AVAILABLE


- For surface mount with Tiger Eye™ contact, see www.samtec.com?ROLC
- Also see TOLC/SOLC Series for surface mount design with Tiger Buy™ contacts.

Note: Other Gold plating options available. Contact Samtec.

Note: Some sizes, styles and options are non-standard, non-returnable.

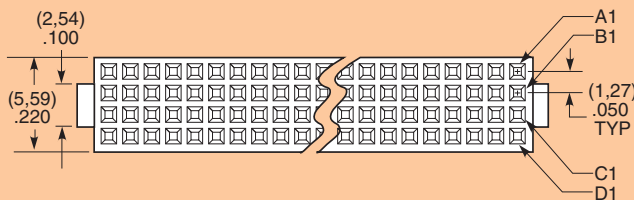

LEAD STYLE	C
–01, –M1	(1,91) .075
–04, –M2	(3,04) .120

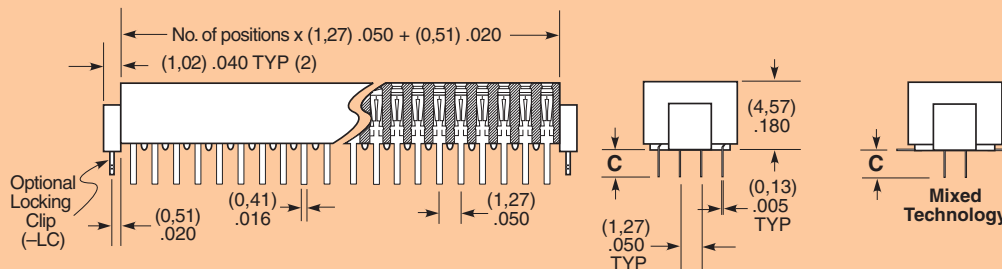

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683