



Panel Cutout




Terminal Options






6.3mm Tab

4.8mm Tab



Solder

Screw

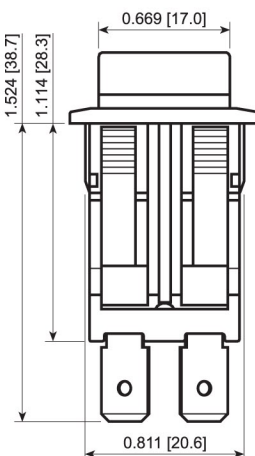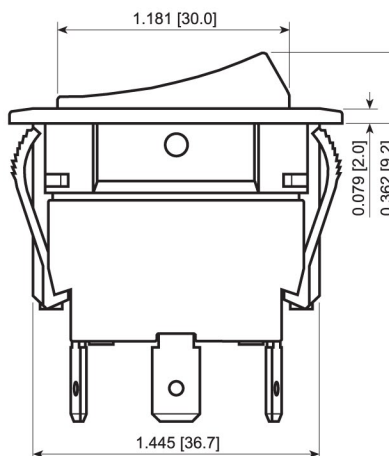

Wire Leads
(xx in inches)

FEATURES:

- Heavy Duty Ratings with cULus Approval
- Full Size Rocker Switch
- Internal Dust and Water Protection to IP54
- Glossy Finish Option

SPECIFICATIONS:

RATING: *MAINTAINED SWITCHES:*
 20A 125VAC [cULus UL508]
 15A 277VAC [cULus UL508]
 2HP 125-250VAC [cULus UL508]

MOMENTARY SWITCHES:
 20A 125VAC [cULus UL508]
 15A 277VAC [cULus UL508]
 1.5HP 125-250VAC [cULus UL508]

TEMPERATURE: -20°C to 55°C
ELECTRICAL LIFE: 6,000 Cycles [cULus]
CONTACT RESISTANCE: 50mΩ Max.
INSULATION RESISTANCE: 800MΩ Min. at 500VDC
DIELECTRIC STRENGTH: 1,500VAC for 1 Minute
INGRESS PROTECTION: IP54 Standard

MATERIALS:

BODY: Polyamide 6/6, UL94 V-2
ACTUATOR: Polyamide 6/6, UL94 V-2
CONTACTS: Silver Alloy
TERMINALS: Brass
 Silver Plated Brass



RVW52D1100



RVW42D2223

RVW46D1122

RVWW6Z02D1100

Series

Terminal

 1 - 4.8mm Tabs
 4 - 6.3mm Tabs
 5 - Solder
 6 - Screw

Function

 1 Pole:
 1 - Off-On
 3 - On-On
 4 - Off-(On)
 5 - On-Off-On
 A - On-(Off)
 B - On-(On)
 C - On-Off-(On)
 D - (On)-Off-(On)

Rating

 D - 20A 125VAC

Body Color

 1 - Black
 2 - White
 3 - Almond
 4 - Grey
 9 - Red

Actuator Color

 1 - Black
 2 - White
 3 - Almond
 4 - Grey
 5 - Orange
 7 - Blue
 8 - Green
 9 - Red

Marking Color

 0 - None
 1 - Black
 2 - White
 8 - Red

Marking Type

 0 - None
 1 - I/O Vert.
 2 - ON/OFF/ON Vert.
 3 - ON/OFF Vert.
 4 - ON/OFF Horiz.
 9 - I/O/III Horiz.
 S - I/O/III Vert.
 R - I/O Horiz.

2 Pole:
 2 - Off-On
 G - On-On
 E - Off-(On)
 6 - On-Off-On
 F - On-(Off)
 H - On-(On)
 J - On-Off-(On)
 K - (On)-Off-(On)

Custom Colors and Markings Available Upon Request

Note:
 Terminal bridging options available. See "Z02" function for polarity reversal in example photo.

EXAMPLE PART NUMBERS:

RVW41D1100 1P Off-On
 Black Body/Actuator, No Marking

RVW42D1100 2P Off-On
 Black Body/Actuator, No Marking

RVW42D1121 2P Off-On
 Black Body/Actuator, I/O Vert.

RVW43D1100 1P On-On
 Black Body/Actuator, No Marking

RVW45D1100 1P On-Off-On
 Black Body/Actuator, No Marking

RVW46D1100 2P On-Off-On
 Black Body/Actuator, No Marking

RVW4GD1100 2P On-On
 Black Body/Actuator, No Marking

RVWG41D1100 1P Off-On
 Glossy, Black Body/Actuator, No Marking

RVWG42D1100 2P Off-On
 Glossy Black Body/Actuator, No Marking



E-SWITCH®

www.e-switch.com

800.867.2717