

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RQ172-A2

ALK4300

BZ-2RQ172-A2
PAGE 1 OF 1

M

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. PR - 1024

07OCT05

RJ

CHECK

07DEC69

16 DEC 69

29 MAR 94

CSL
31 JUL 96

DLT
19 AUG 98

F
0015540
KSR
07OCT05

17 DEC 69

LSD

CHECK


15 DEC 69

GCH

15 DEC 69

DRAWN

0-50376-1A

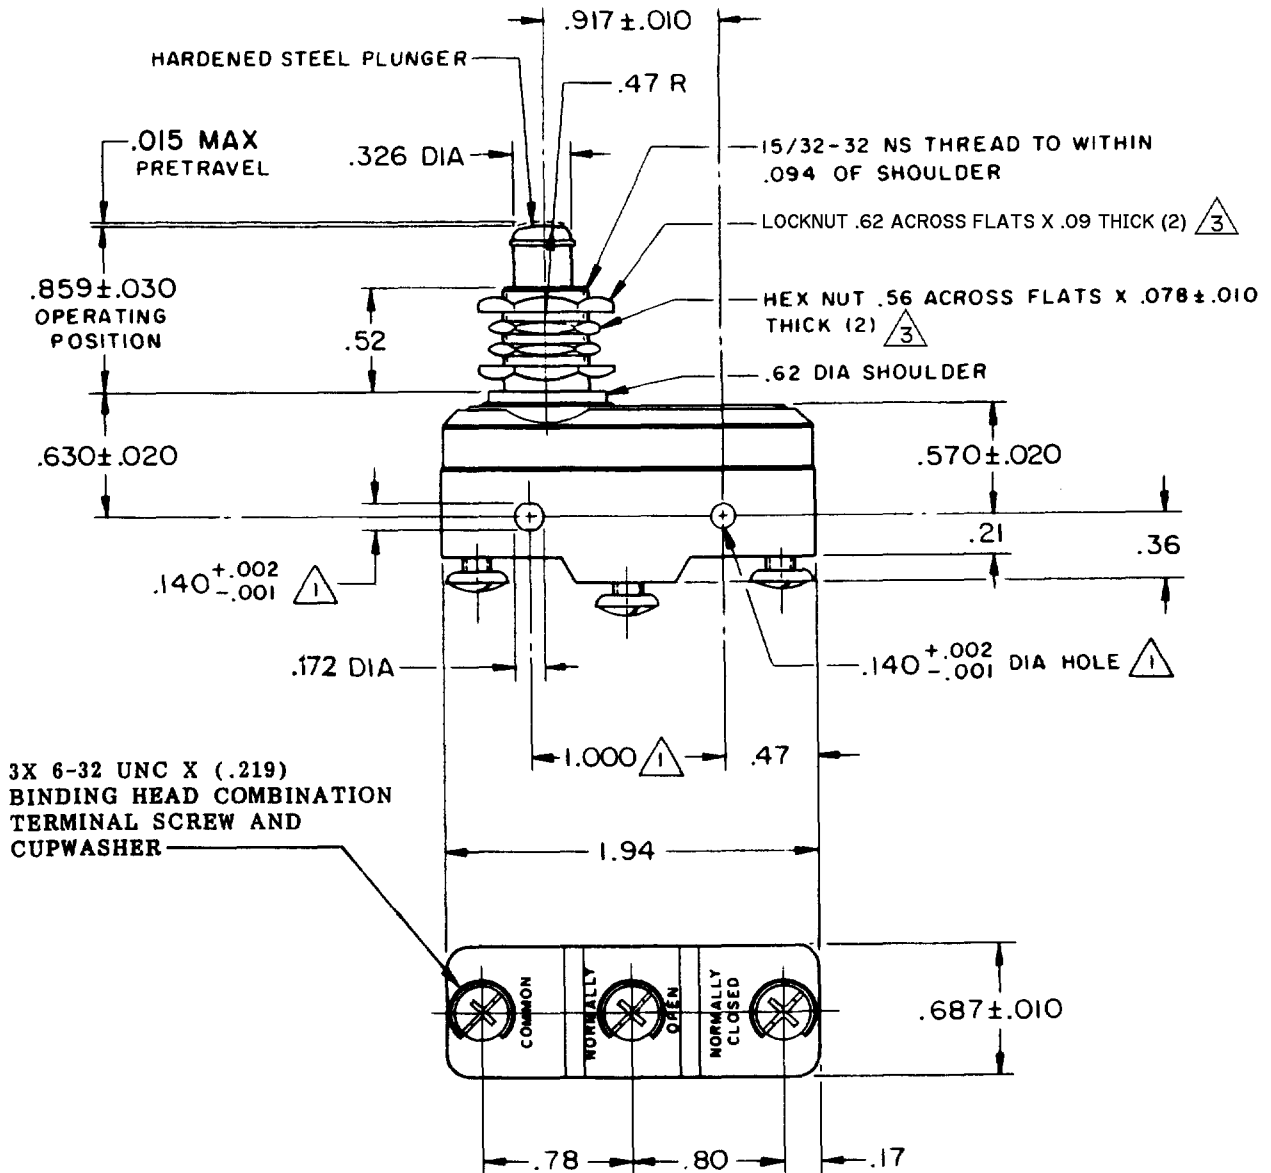

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- ② CONTACT MATERIAL - GOLD ALLOY
- ③ HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9 - 13 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .0004 - .0020
OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L22-

1A - 125 VAC

-L288-
-L315
-L307-

CE $\triangle$ $\triangle$ $\triangle$ $\triangle$
1A 250V $\sim$ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES $\pm$

WEIGHT .094 LB