

PRODUCT NUMBER

10072354-X01-XXXLF

PLATING
S = 0.38µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL OVER 1.27µm MIN NICKEL

RoHS COMPATIBLE
NOTE 6

PACKAGING
NOTE 5

G = 0.76µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL OVER 1.27µm MIN NICKEL

TOTAL NB OF POSITIONS
04 TO 50 POS

F = GOLD FASH ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL OVER 1.27µm MIN NICKEL

COLOR OPTION NOTE 1

NOTES:

1. MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC UL-94V0
- = STANDARD COLOR CREAM
B = OPTIONAL COLOR BLACK

2. MATERIAL TERMINAL: COPPER ALLOY

3. TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW.

4. 7N MIN PIN RETENTION IN EITHER DIRECTION.

5. PACKAGING :
= PLASTIC BOX
U = TUBE AVAILABLE FROM 06 TO 50 POS
K = TAPE & REEL WITHOUT PICK UP CAP



6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING
= "LF" MEANS THE PRODUCT IS LEAD-FREE
2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.




b - MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS MAX IN A CONVECTION, INRA-RED OR VAPOR PHASE OR REFLOW OVEN.

c - LABELLING:
- MEETS PACKAGING SPECS AS PER GS-14-920.

d - THIS PRODUCT MEETS EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008

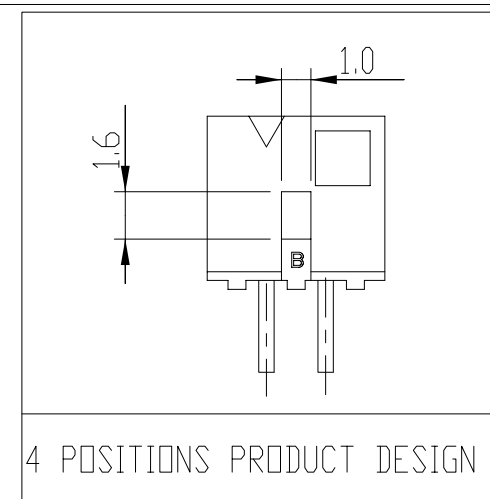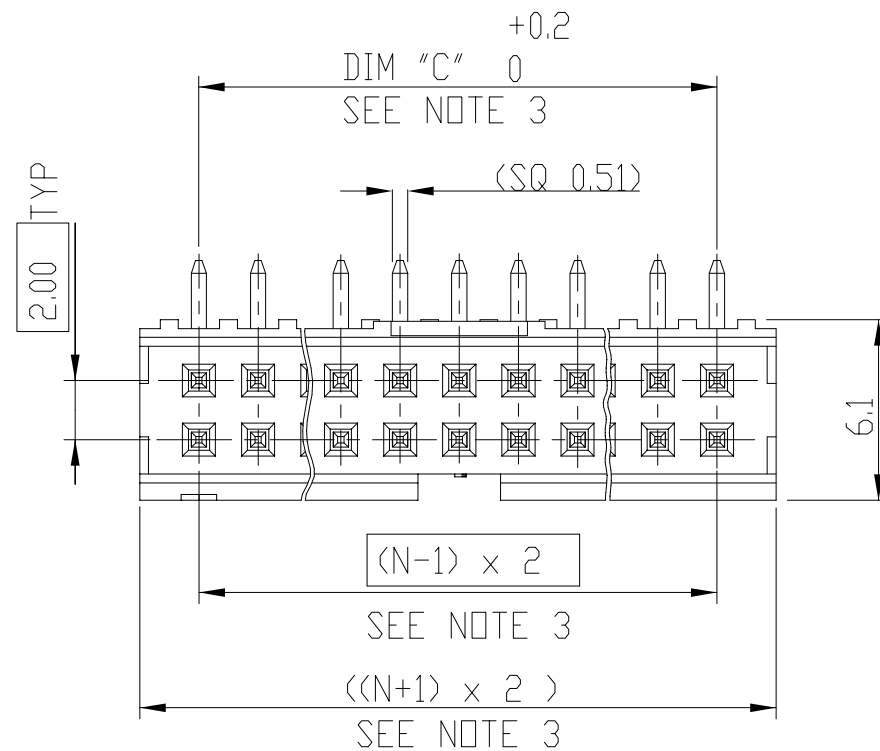

INDICATES POS 1

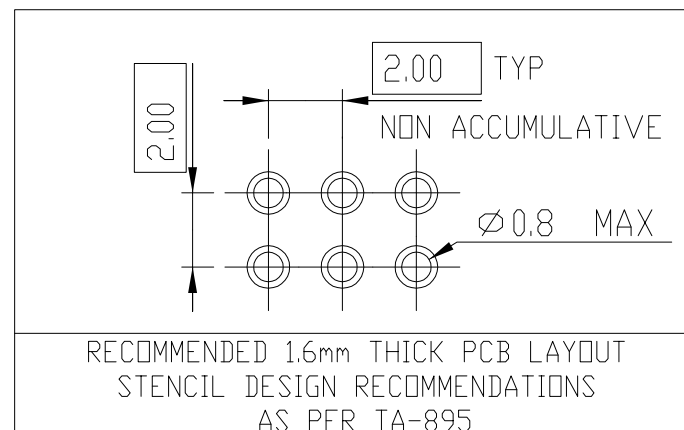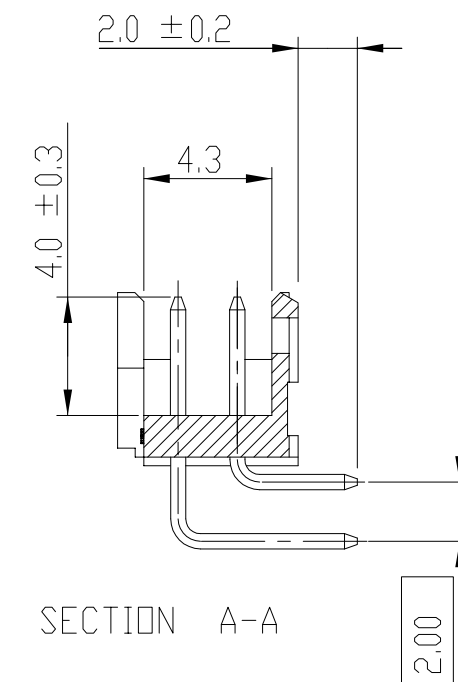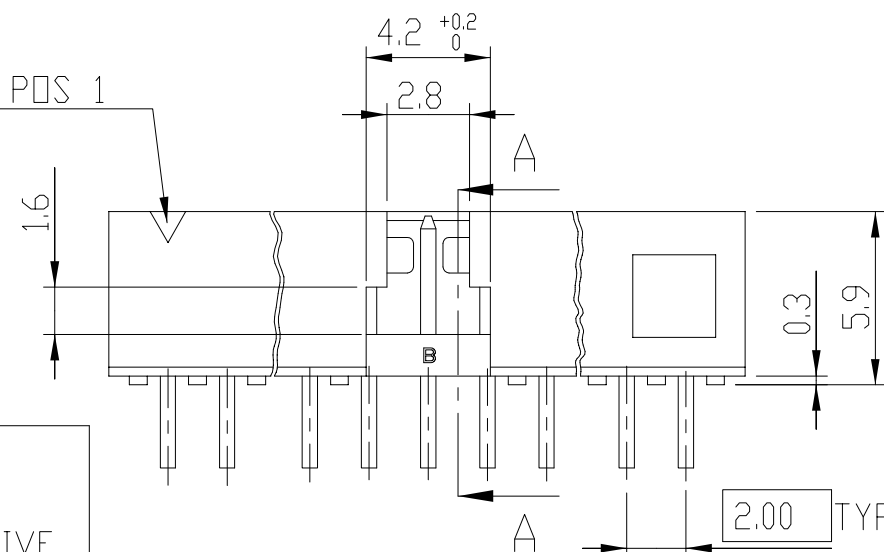

rev	ecn no	dr	date
A	F07-0105	LMU	07.01.10
B	F08-0113	LMU	08.01.17
C	F08-0145	ELA	15.04.08
D	F10-0013	GPE	23.02.10
E	F11-0303	LMU	12.09.11
F	F11-0324	LMU	24.10.11
-	-	-	-

www.fciconnect.com			surface ISO 1302		- ✓		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	L MULIN	06.09.14	ANGULAR	LINEAR	0.X		± 0.13		size A3	Scale 4:1		
Eng	J COMPAGNON	06.09.14			0.XX		± 0.05					
Chr	-	-			0°	±2°	0.XXX		±-		ECN	-
Appr	JM.C	06.09.14	Product family				Minitex		Spec ref		-	
		title SHR HEADER 2.00 RIGHT ANGLE PIP				dwg no 10072354				Rev. F		
catalog no				-				CUSTOMER Drawing		sheet 1 of 1		