

0,05	.002
7,29	.287
7,92	.312
8,33	.328
8,5	.33
9,4	.37
9,5	.375
12,7	.50
17,8	.70
18,3	.72
20,3	.80
25,4	1.00
29,5*1,5	1.161*.059
32,0	1.26
40,0	1.57
50,8	2.00
60,35	2.38
80,0	3.15
96,0	3.78
98,0	3.86
101,6	4.00
104,0	4.09
0,50 Nm	.369 PF
1,13 Kg	2.49 LB

ISSUE	3	M	CATALOG LISTING	11CX 12CX SERIES CHART 7	PAGE 1 OF 1

		RELEASE NO. PR-21223	REPLACES
--	--	----------------------	----------

REVISIONS	
A	PR22514 J A K 7 JAN 97
B	CO- 95297 G J W 6 JUL 99


CHECK	
-------	--

[illegible]

CHECK	GLH	7 SEP 94	CHECK
-------	-----	----------	-------

FORMTEK
DRAWN

GLH	7 SEP 94
-----	----------

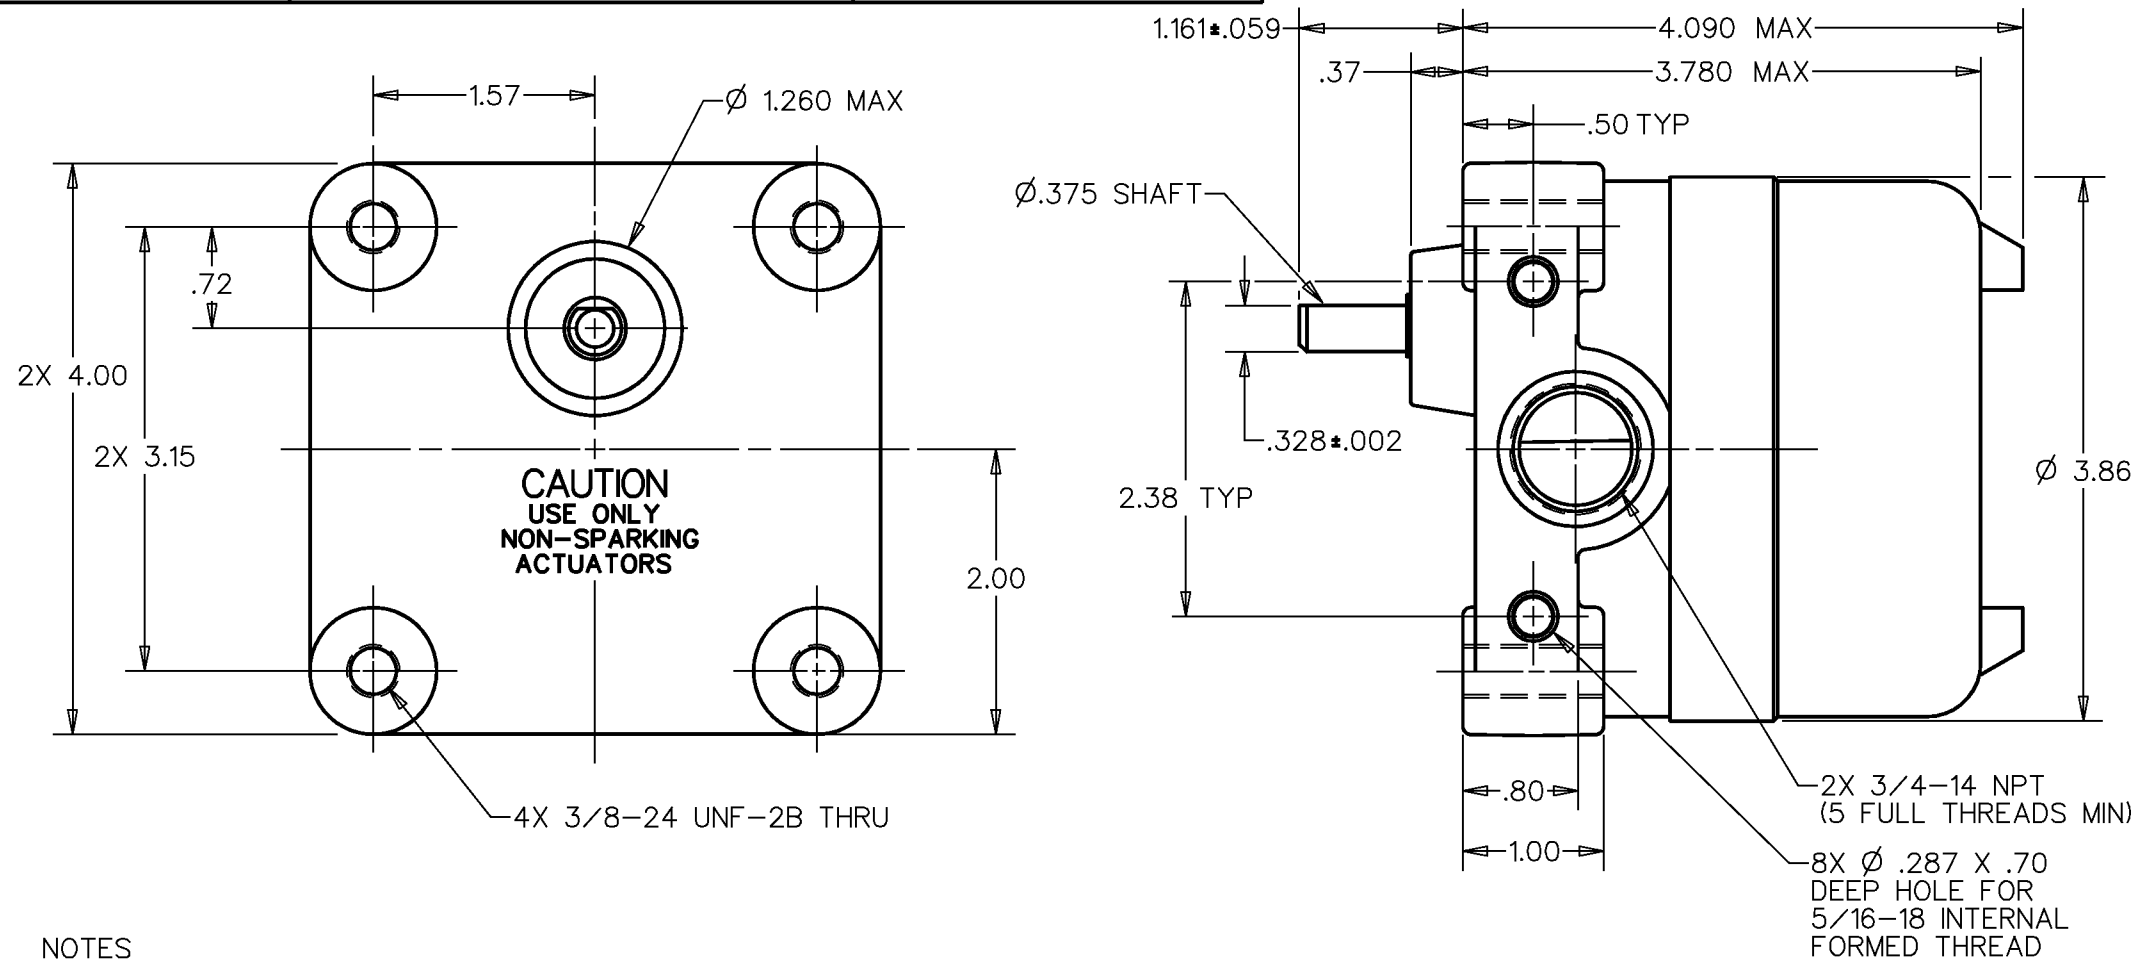


NOTES

- 1 - EXPLOSION PROOF-UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS 1, GROUPS C AND D; CLASS 2, GROUPS E, F, AND G
- 2 - ALUMINIUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
- 3 - 6-32 UNC X (.312) PAN HEAD TERMINAL SCREW AND CUPWASHER (3 PER BASIC)
- 4 - CAMS MAY BE REPOSITIONED IN 7°20' INCREMENTS
- 5 - FOR USE IN TEMPERATURES UP TO 85°C
- 6 - UNIT PROVIDES NO SHAFT RESTORING FORCE, THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF SHAFT
- 7 - CHARACTERISTICS PERTAIN TO ALL CHARTED LISTINGS
- 8 - SEE (M) 7CX SERIES CHARTS 1 AND 2 FOR LEVER ACTUATORS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE	— — — — —	.369 LB FT	MAX
PRETRAVEL	— — — — —	15°	MAX
DIFFERENTIAL TRAVEL	— — — — —	10°	MAX
OVERTRAVEL	— — — — —	90°	MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
(EACH BASIC)

SCALE .75:1

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 2.49 LB APPROX

CAT LIST 	DESCRIPTION 	ELECTRICAL DATA
11CX12BC-D01	2 BASICS, EACH OPERATES CLOCKWISE & COUNTER CLOCKWISE	L96 15A 125, <u>250</u> OR 480 VAC 1/8HP 125 VAC, 1/4HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC  
11CX11B-D01	1 BASIC, OPERATES CLOCKWISE & COUNTER CLOCKWISE	