
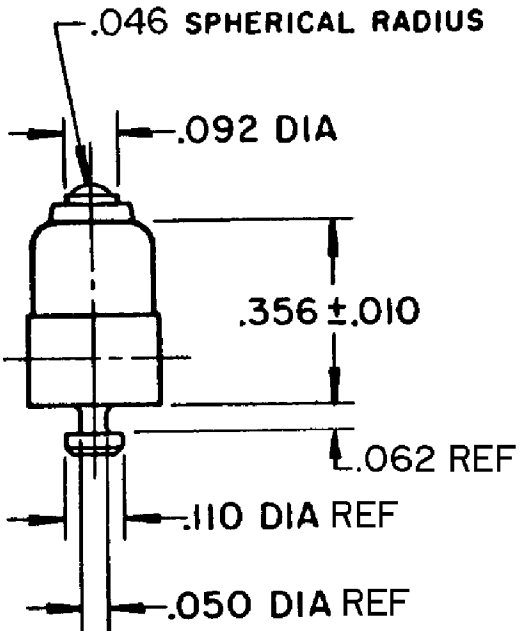
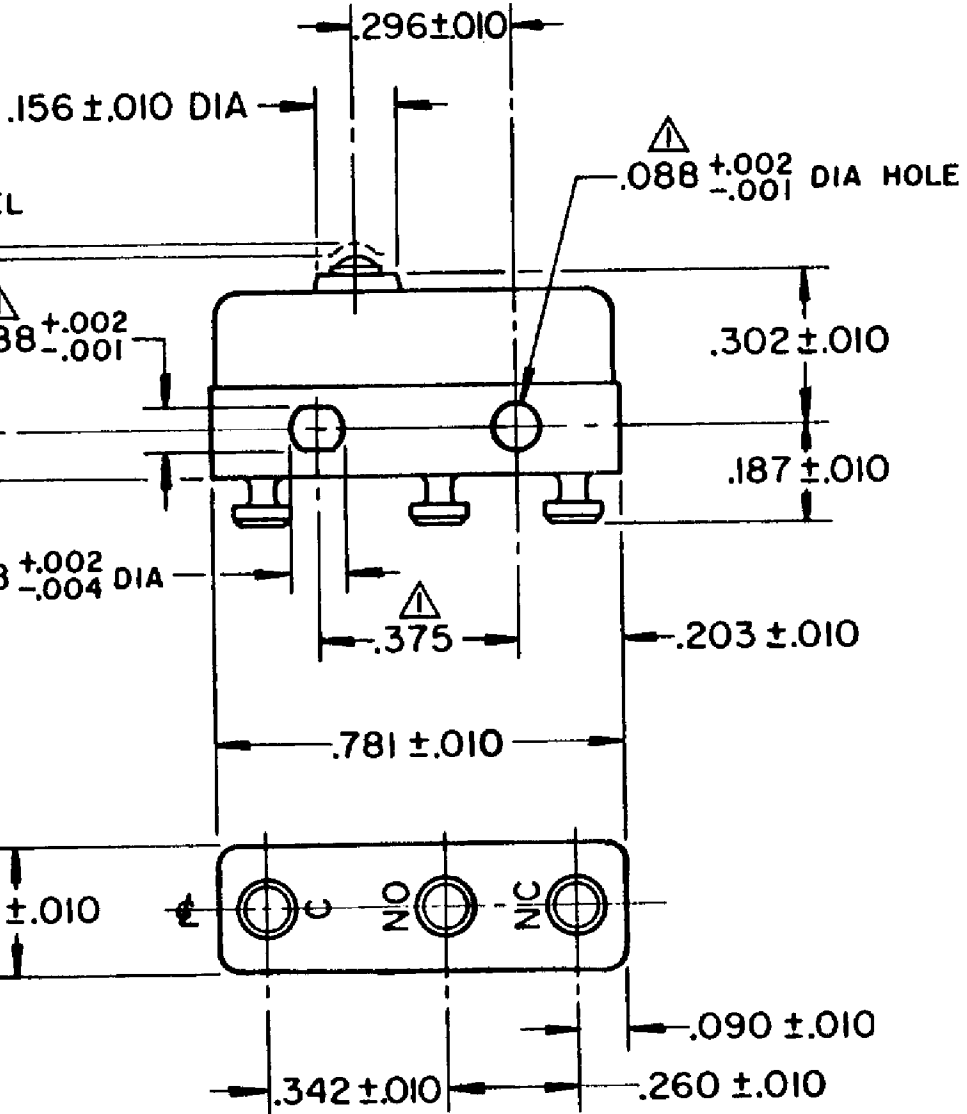


HONEYWELL PART NUMBER
12SM604-T
PRODUCT CODE TXA8300

REV	DOCUMENT	CHANGED BY	CHECK
5	0038444	KVS 09APR08	ASD

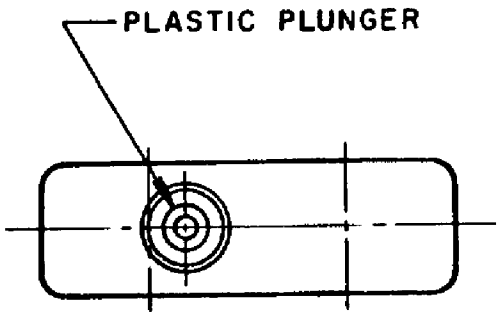

NOTE -
1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING
3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
4-CONTACT MATERIAL 24 K GOLD PLATED

RELEASE NO.	PR - 3561
REPLACES	X60608-SM

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	VK	15 FEB 08	Honeywell				
OPERATING FORCE — — — — 3-5 OZ		CONTACT ARRANGEMENT SPDT		TOLERANCES UNLESS NOTED:		CHECK	RJ	15 FEB 08					
RELEASE FORCE— — — — 1 OZ MIN				NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE				
DIFFERENTIAL TRAVEL— — — .004 MAX				ONE PLACE .X ±									
OVERTRAVEL — — — — — .003 MIN				TWO PLACE .XX ±									
				THREE PLACE .XXX ±									
				FOUR PLACE .XXXX ±									
				ANGLES ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		UL, CSA 0.1A 125 VAC 30 VDC   BRAND L171		THIRD ANGLE PROJECTION		RASTER			B	I	12SM604-T		5
									SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	