
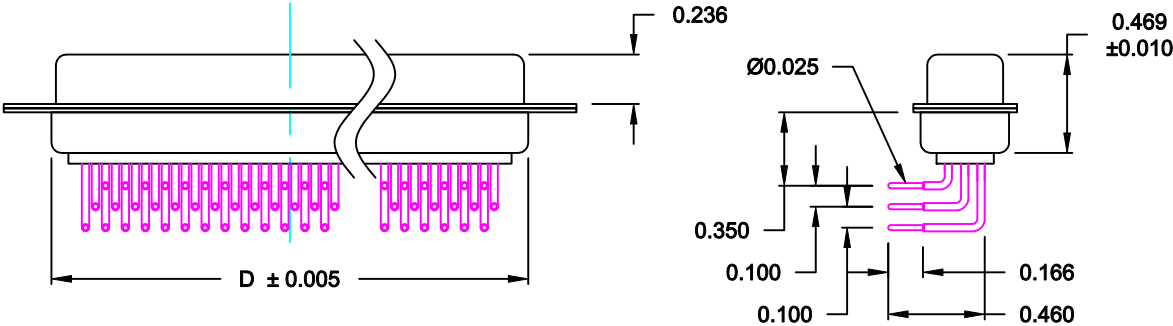


DESCRIPTION: HIGH DENSITY - MACHINED CONTACTS - RIGHT ANGLE

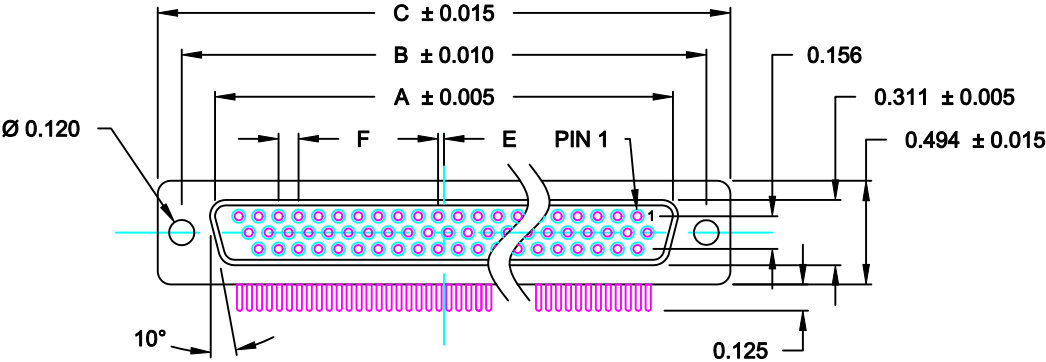

MATERIALS AND FINISH:

SHELL: STEEL MATERIAL, NICKEL FINISH
INSULATOR: PA6T=260°C, UL 94V-0 RATED, BLACK
CONTACT MATERIAL: BRASS
CONTACT FINISH: SELECTIVE GOLD FINISHED

ELECTRICAL:

CONTACT CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: 30 Milliohms Max.
DIELECTRIC WITHSTANDING VOLTAGE: 1,000VAC Min.
INSULATION RESISTANCE: 5,000 Megohms Min.
TEMPERATURE RATING: -55° ~ +105° C

181-MYY-2YYRYYY

SERIES _____
MACHINED CONTACTS _____
POSITIONS _____
15 _____
26 _____
44 _____
62 _____
GENDER _____
2 = FEMALE
TERMINATION _____
1 = RIGHT ANGLE
SHELL PLATING _____
3 = NICKEL
RoHS COMPLIANT _____
HARDWARE OPTIONS _____
14 = BRACKET WITH BOARD LOCK
AND LOCATOR PLATE
PLATING OPTIONS _____
1 = GOLD FLASH, ENTIRE CONTACT
2 = 30u" GOLD, ENTIRE CONTACT

DIMENSIONS (IN.)

No. OF PINS	A	B	C	D	E	F
15	0.643	0.984	1.213	0.759	0.010	0.090
26	0.971	1.312	1.541	1.083	0.020	0.090
44	1.511	1.852	2.088	1.625	0.020	0.090
62	2.159	2.500	2.729	2.272	0.023	0.095

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH

DATE: 03-19-07

CHECKED:

DATE:

SCALE: 1 : 1

SHEET 1 OF 4


REV 9

DWG NO.

181-MYY-2YYRYYY


RoHS COMPLIANT

NorComp

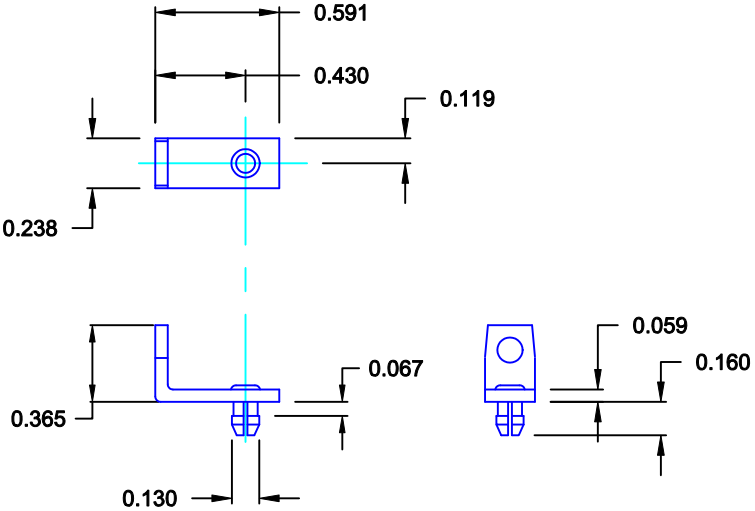

MOUNTING BRACKET
WITH BOARD LOCK

MATERIAL: COLD ROLLED STEEL
PLATING: CLEAR ZINC

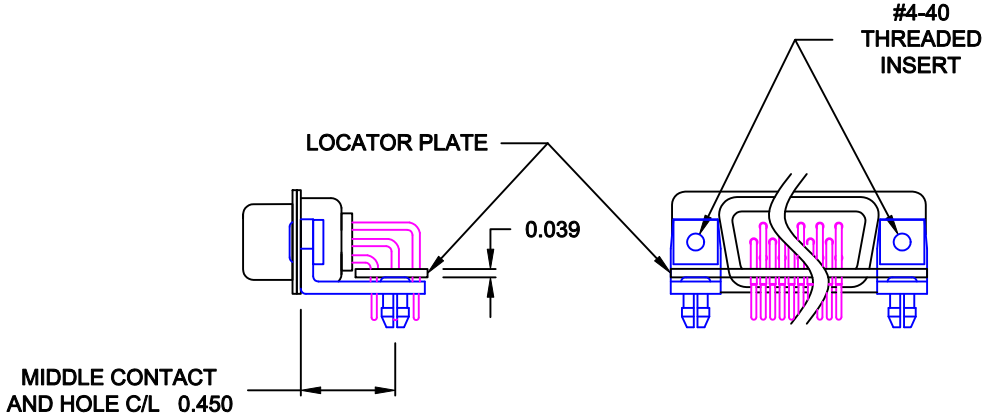





BRACKETS MOUNTED ON CONNECTOR
WITH LOCATOR PLATE

FOR CLARITY
HIDDEN LINES
NOT SHOWN


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 11-28-05		
		CHECKED:		DATE:		
	SCALE: 1 : 1		SHEET 2		OF 4	REV 9
	DWG NO. 181-MYY-2YYRYYY					

NOTE: FEMALE LOCATOR PLATE SHOWN
FLIP FOR MALE





MATERIAL: INSULATION PAPER
0.039" THICK

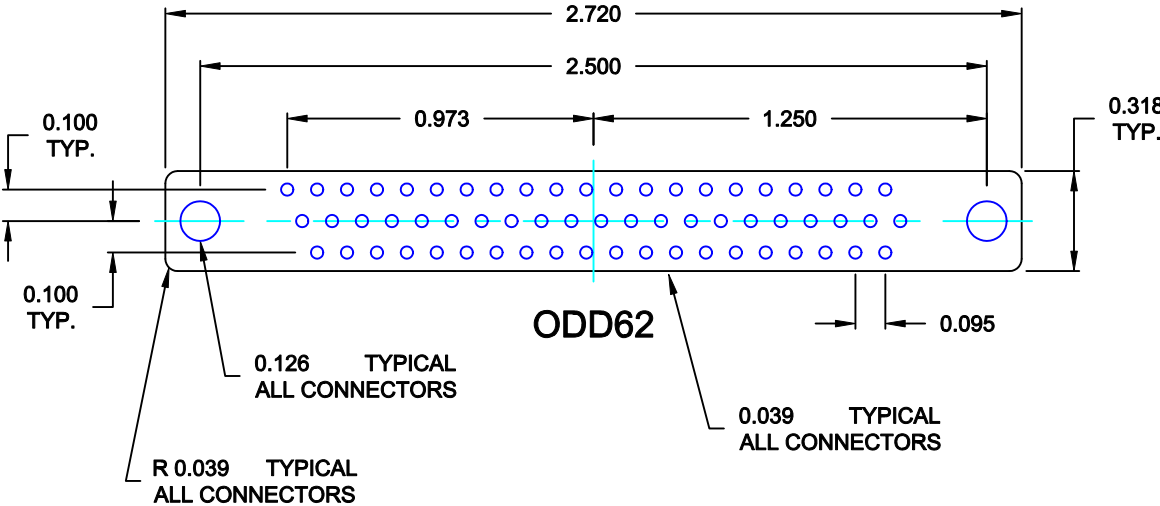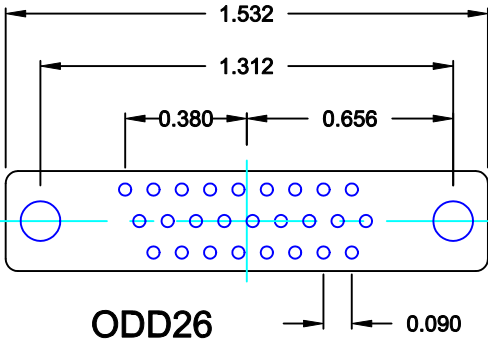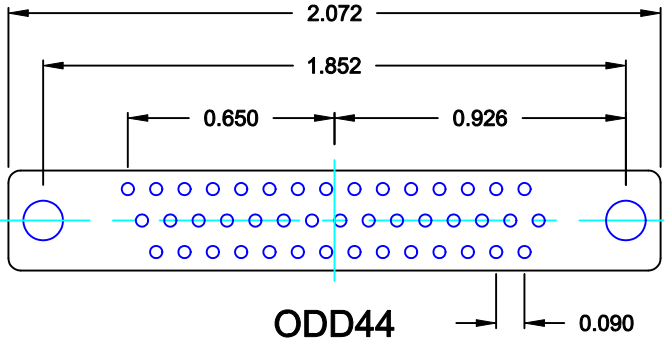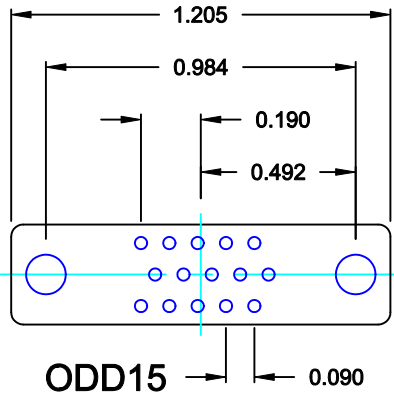

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 02-18-08	
		CHECKED:		DATE:	
	SCALE: 1.5 : 1		SHEET 3 OF 4		REV 9
	DWG NO. 181-MYY-2YYRYYY				

RoHS COMPLIANT

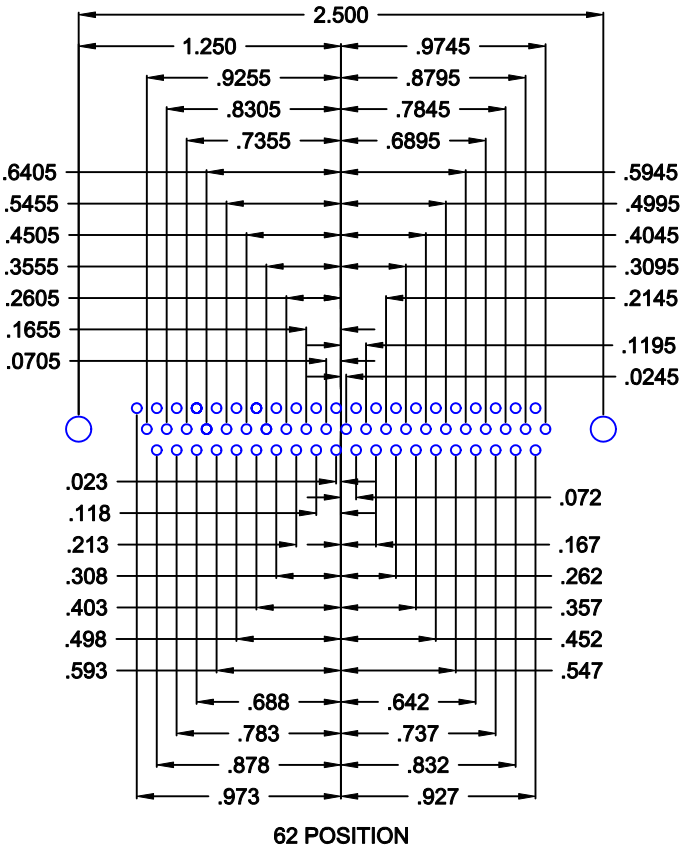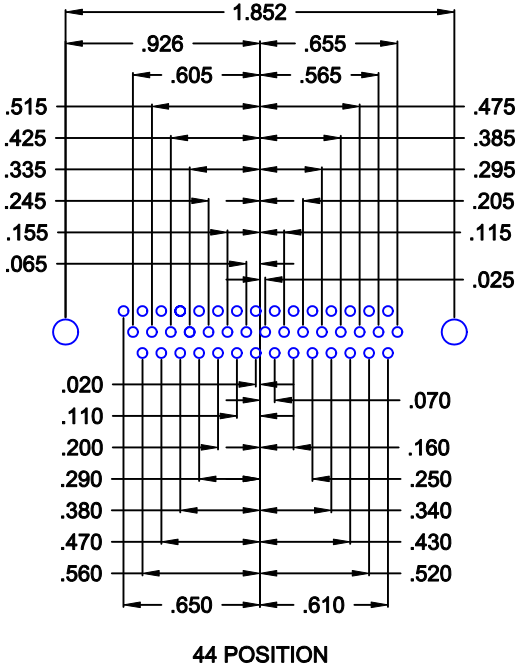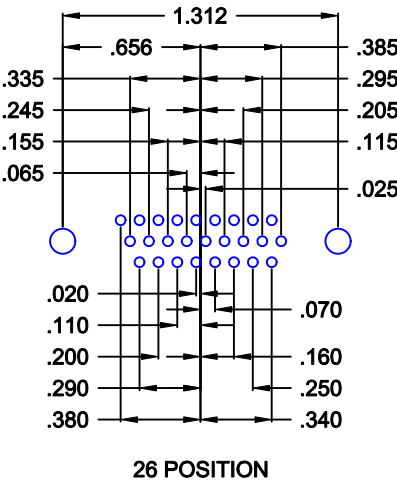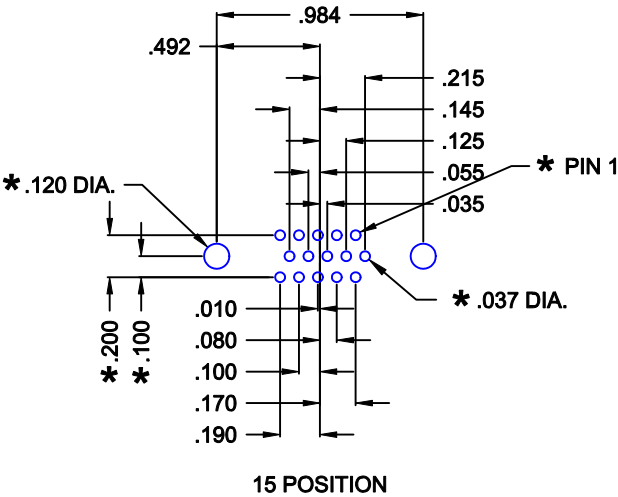

* TYP. ON ALL SIZES

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 03-19-07	
		CHECKED:		DATE:	
	SCALE: 1 : 1		SHEET 4 OF 4		REV 9
	DWG NO. 181-MYY-2YYRYYY				