



HONEYWELL PART NUMBER
ITL187_SERIES_CHART I

REV	DOCUMENT	CHANGED BY	CHECK
9	0008574	KR 21OCT04	AK

7 8	CATALOG LISTING	5 CIRCUIT MADE WITH TOGGLE LEVER IN			MILITARY RATING (AMPS)								
		KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	RESISITIVE LOAD			LAMP LOAD		INDUCTIVE LOAD			
					DC 28	VOLTS 125	AC 250	VOLTS 125	250	28 VDC	125 VAC	28 VDC	125 VAC
	ITL187-1	ON	OFF	ON	20	.75	.5	15	6	5	3	15	10
	ITL187-2	OFF	NONE	ON									
FAA-PMA	ITL187-3	ON	NONE	ON									
	ITL187-21	NONE	OFF	ON									
	ITL187-31	NONE	ON	ON	(REFER TO L191 FOR UL RATING)								
	ITL187-4	MOM OFF	NONE	ON	15	.75	5	15	6	4	2	10	7
	B	MOM ON	OFF	ON									
	ITL187-6	MOM ON	NONE	OFF									
	ITL187-7	MOM ON	OFF	MOM ON									
	ITL187-8	MOM ON	NONE	ON									
	ITL187-51	NONE	ON	MOM ON									
	ITL187-61	MOM ON	OFF	NONE	(REFER TO L192 FOR UL RATING)								

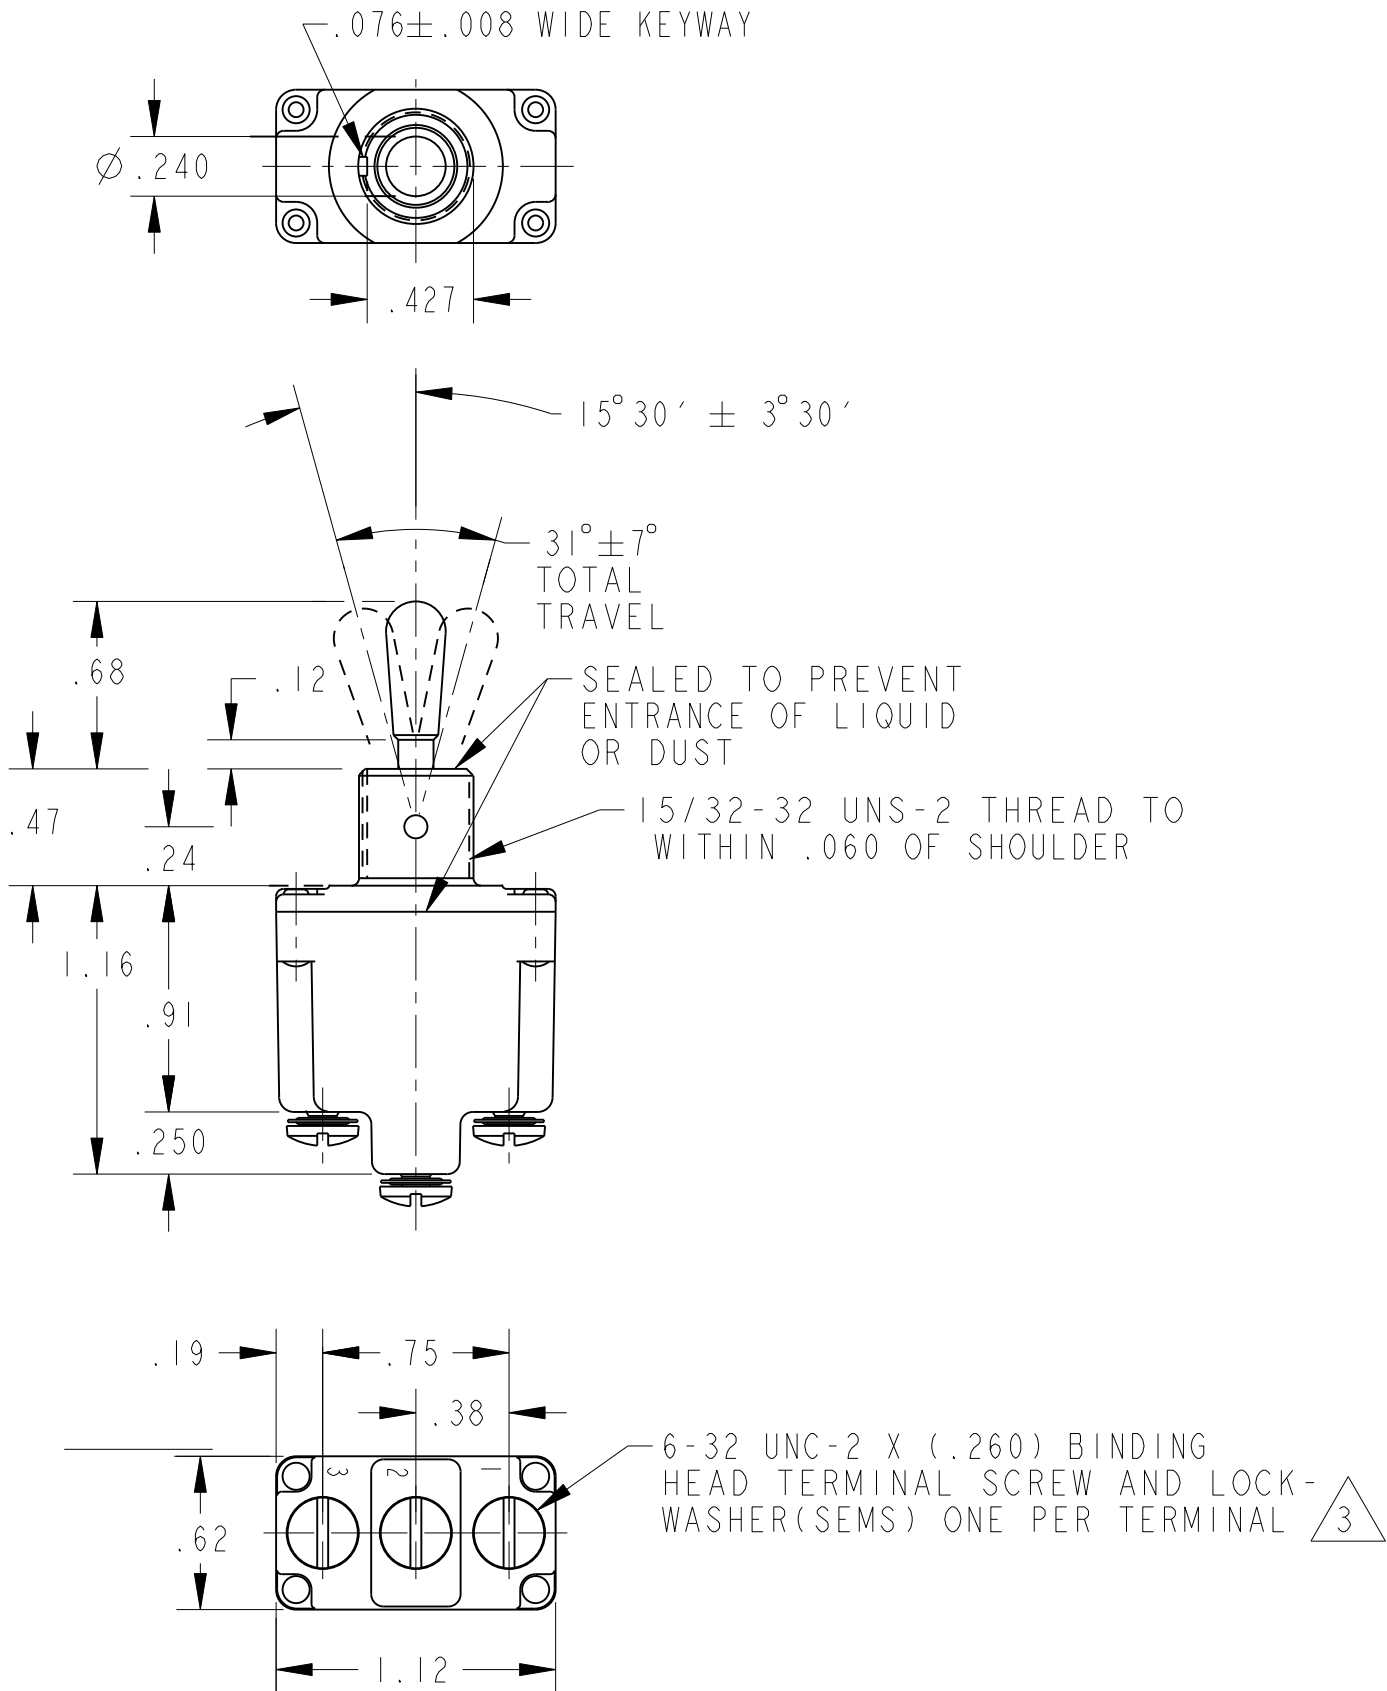

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FURNISHED UNASSEMBLED
 - 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7
 - 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 6 - GOLD PLATED CONTACTS
 - 7 - FAA-PMA MUST BE MARKED ON SWITCH
 - 8 - FOR MANUFACTURING DETAIL SEE THE CORRESPONDING ASSEMBLY DRAWING FOR EACH LISTING FOR FAA-PMA
 - 9 - WEIGHT: .07 LB APPROX

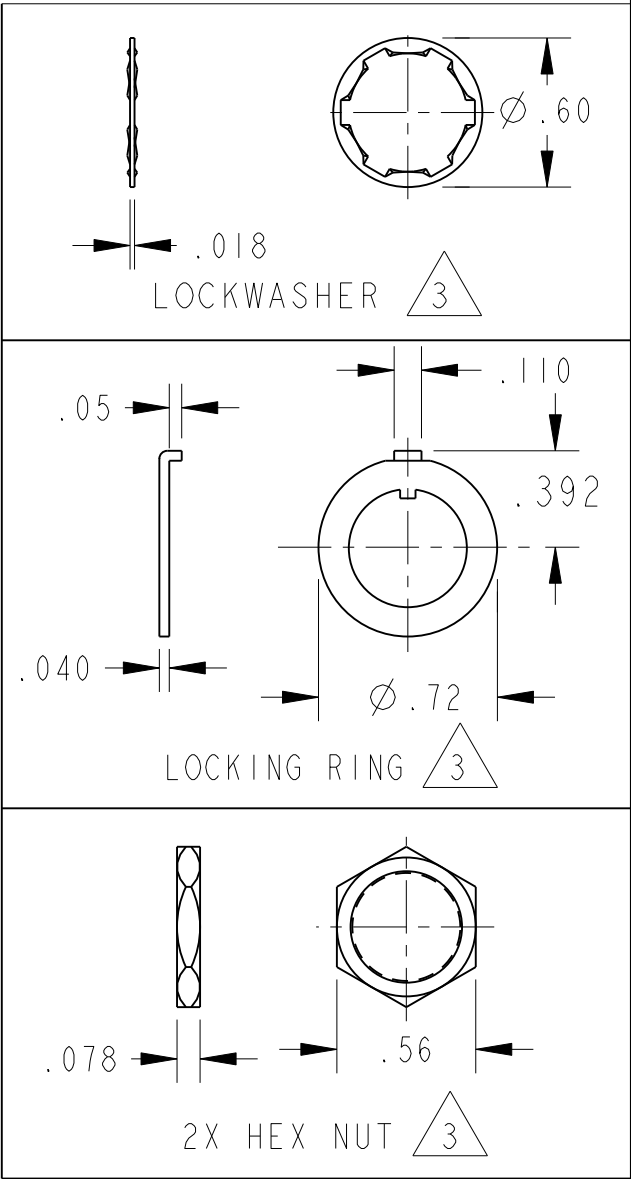

15A-125, <u>250</u> OR 277 VAC	10A-125, <u>250</u> , 277 VAC
1/2 HP-125VAC: 1 HP- <u>250</u> , 277 VAC	1/4 HP-125VAC: 1/2 HP- <u>250</u> , 277 VAC
5A-125VAC "L" CODE L191	3A-125VAC "L" CODE L192

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN TSM 12NOV99	Honeywell		
NO PLACE X ± 0.400 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES X ± 3	CHECK JAF 12NOV99			
THIRD ANGLE PROJECTION	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - TOGGLE
	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE C	TYPE I	DRAWING NAME ITL187_SERIES_CHART I
Pro/ENGINEER 2D		SCALE 1:1	SHEET 1 OF 1	