

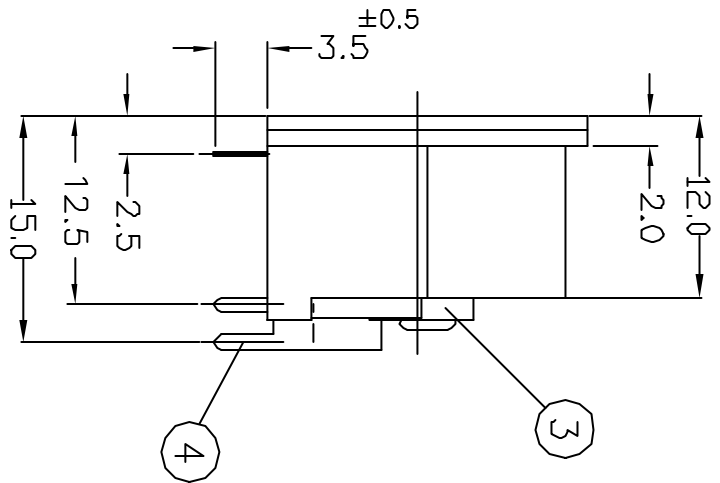
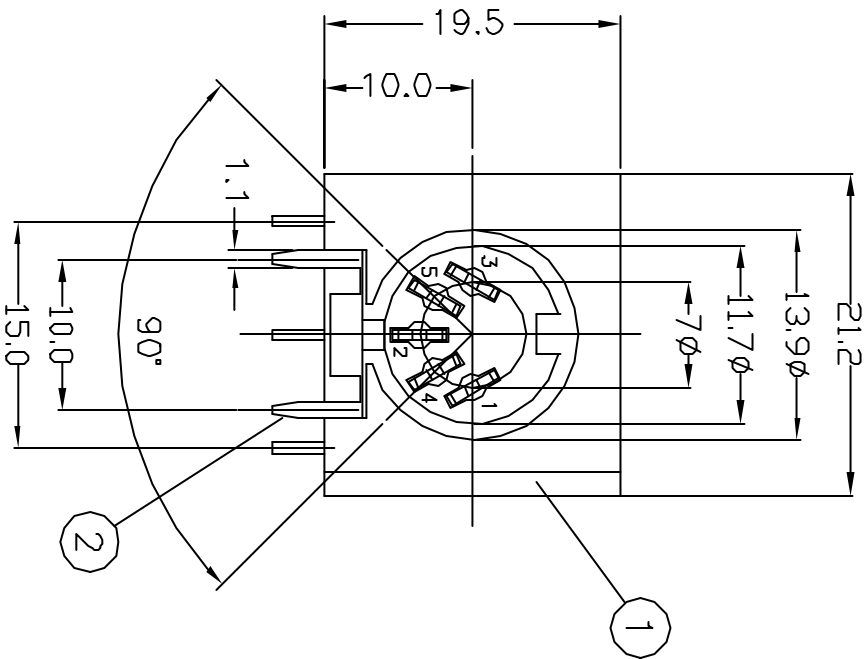


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
C	☒ 修改尺寸	1.4→1.5	J0Y	2/13'-04

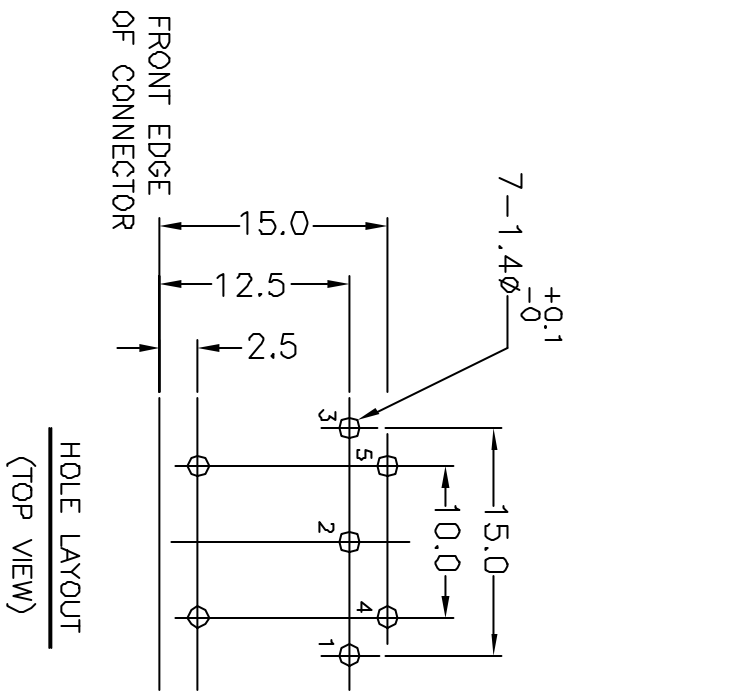

- SPECIFICATIONS:
- CURRENT RATING: AC: 100V 1A
DC: 24V 2A
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: DC 500V 100MΩ MIN.
 - VOLTAGE WITHSTANDING: AC 500V 1 MINUTE
 - INSERTION FORCE: 4Kg MAX.
 - WITHDRAWAL FORCE: 1kg MIN.
 - LIFE TEST: 5,000 CYCLES MIN. AFTER TESTING,
CONTACT RESISTANCE SHALL NOT EXCEED 100mΩ

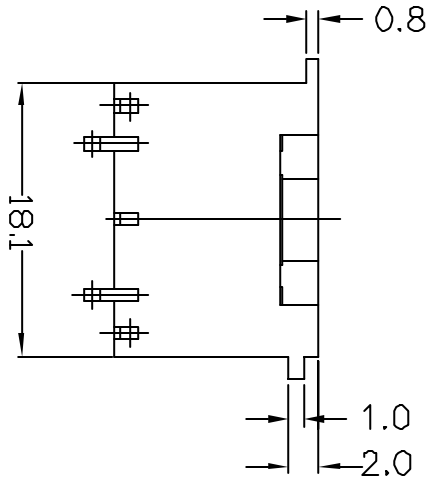

4	CONTACT TERMINAL	5	BRASS 0.7t	SILVER PLATING
3	PLATE	1	BAKELITE BOARD 1.5t [1]	
2	EARTH TERMINAL	1	PHOSPHOR BRONZE 0.25t	SILVER PLATING
1	BODY	1	PBT UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singapore Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE 5P 180° DIN CONNECTOR				
DWN	J0Y 2/13'-04	PART NO.	2DJ-006000003	
CHKD	KAN 2/13'-04	SCALE: 2/1	UNIT: MM	
APVD	ANDREW 2/13'-04	SIZE: A3	SHEET: 10F1	REV: C