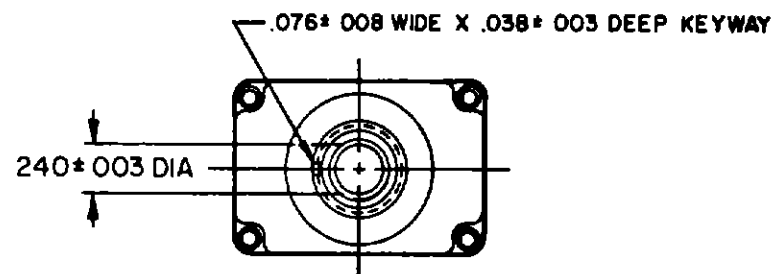


MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG. CODE 91929

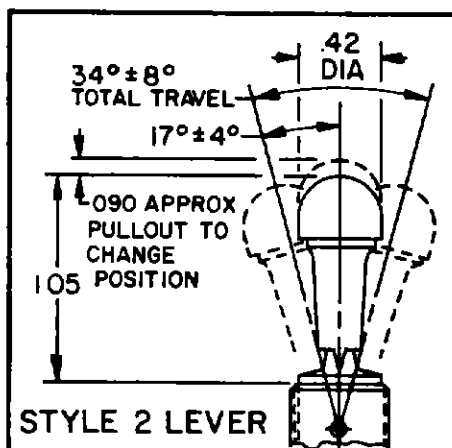
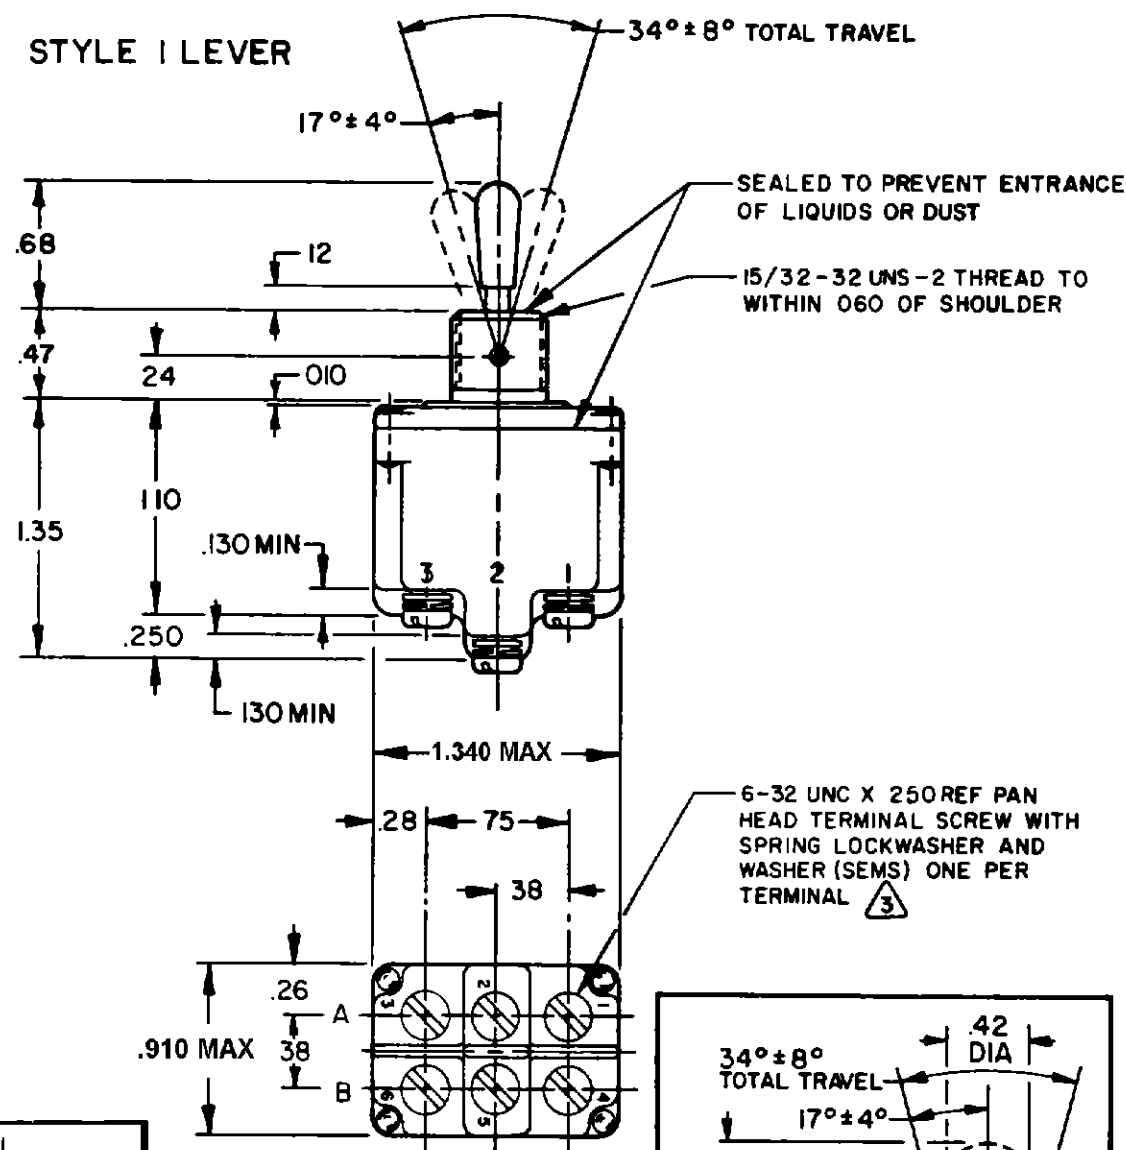
SWITCH-TOGGLE

CATALOG LISTING
2TL11-550 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.
















STYLE 1 LEVER



STYLE 2 LEVER

	CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NUMBER	CURRENT CAPACITY (AMPS)								
				RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
				DC VOLTS		AC VOLTS						
	2 T L II-550	NONE	1	28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
	2 T L II-550 	E, F, K, L, M, N	2	18	75	.5	11	6	5	2	10	8

 "A" LOCKED IN THREE POSITIONS	 "B" LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	 "D" LOCKED OUT OF CENTER POSITION	 "E" LOCKED IN CENTER POSITION	 "F" LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
 "G" LOCKED IN EXTREME POSITION (KEYWAY SIDE)	 "H" LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	 "J" LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	 "K" LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	 "L" LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
 "M" LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	 "N" LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	 "P" LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

 LOCKWASHER (PART NO TS-10013) 	 LOCKING RING (PART NO EN-12449) 
 HEX NUT (2) (PART NO TS-10087) 	

NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- POLE, CIRCUIT DESIGNATION, AND MICRO SWITCH CATALOG LISTING STAMPED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA8
- KEYWAY SHOWN ON LEFT SIDE
- SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE () ± .030
TWO PLACE () ± .015
THREE PLACE () ± .008
ANGLES
WEIGHT 15 LB APPROX