


MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
36CX SERIES
CHART 1

CONVERSION CHART

1,0	.04
4,75	.187
5,1	.200
5,55	.218
7,29	.287
8,5	.33
12,7	.50
17,8	.70
18,3	.72
19,4±0,8	.764±.032
20,3	.80
25,4	1.00
32,0	1.26
40,0	1.57
50,8	2.00
60,35	2.38
80,0	3.15
96,0	3.78
98,0	3.86
101,6	4.00
104,0	4.09
2,5 Kg	5.51 LB
2,75 Kg	6.06 LB
1,13 Kg	2.49 LB

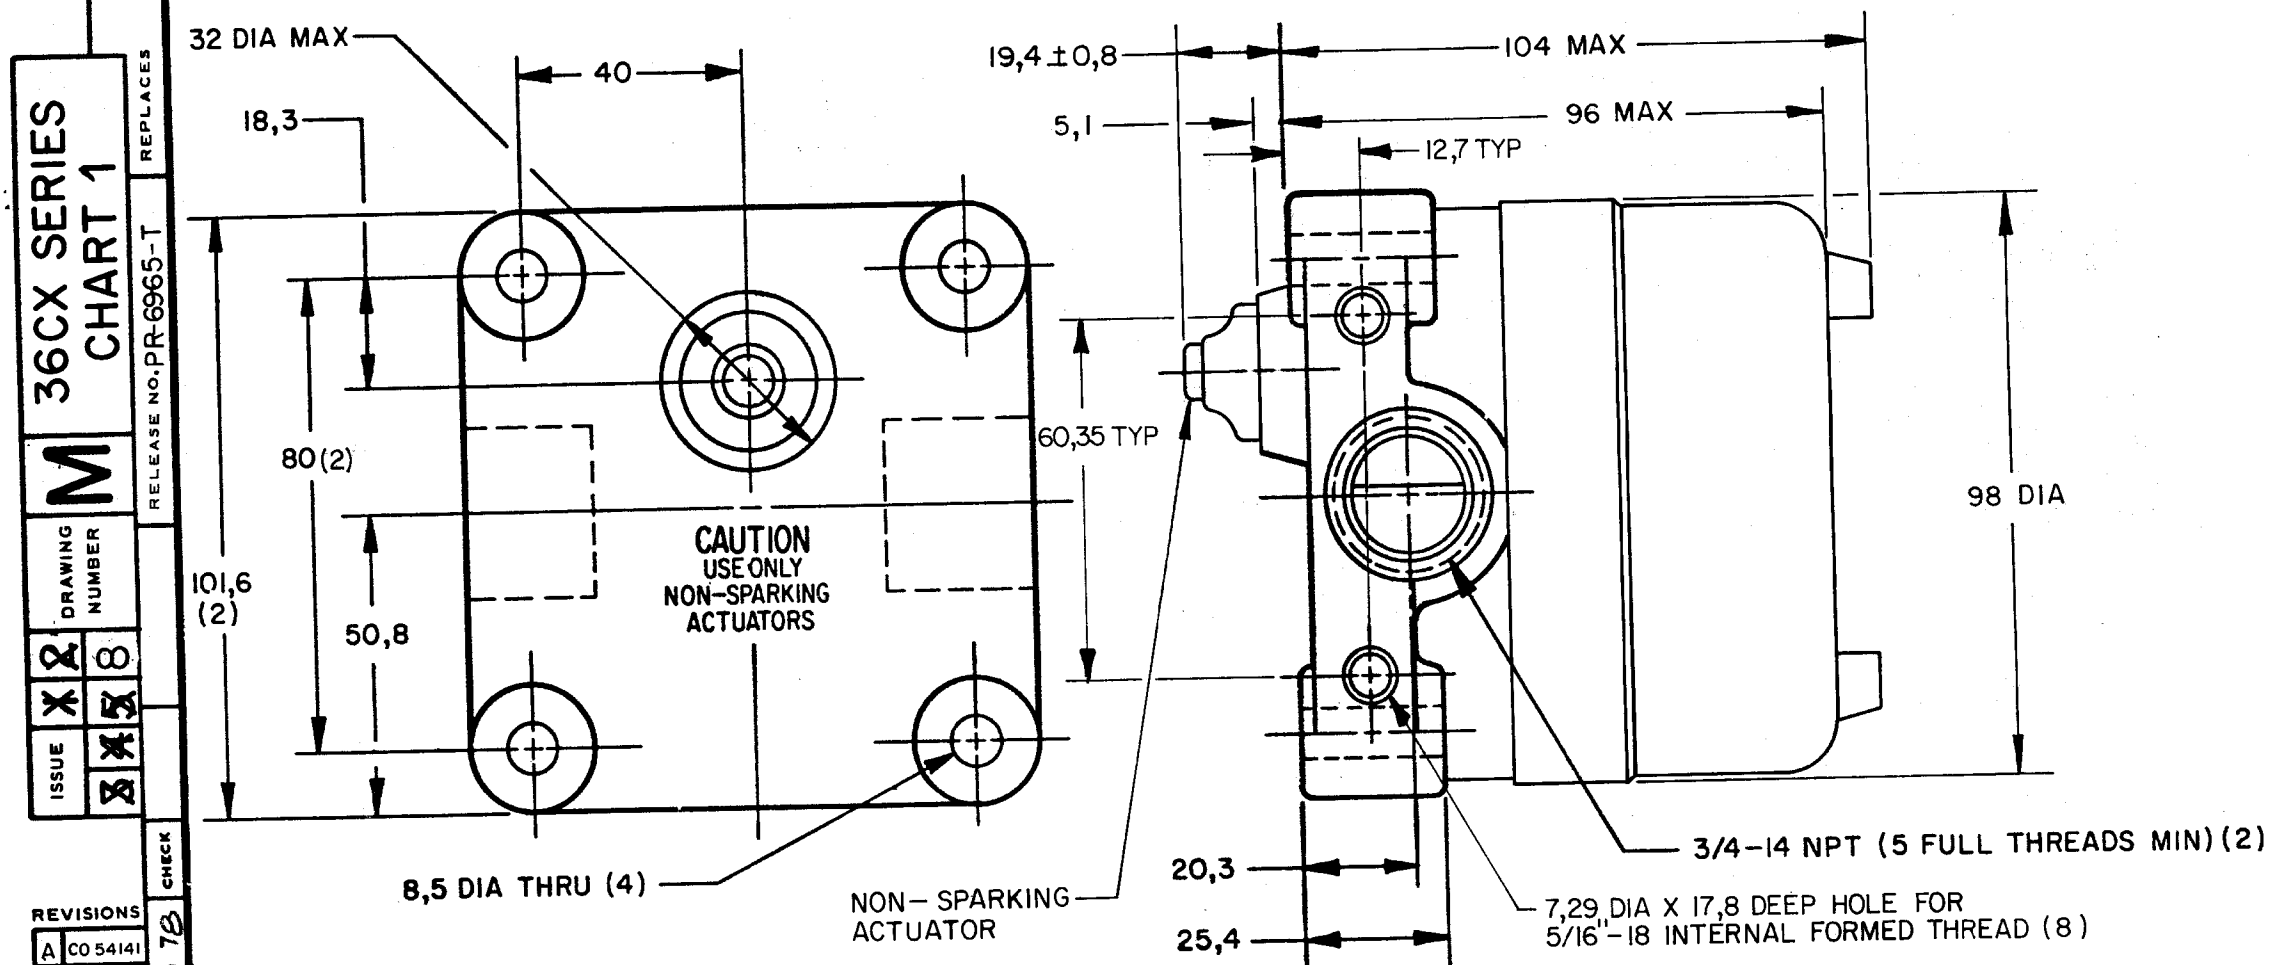


NOTES

- 1 - EXPLOSION PROOF-UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUPS B, C AND D; CLASS II, GROUPS E, F AND G
- 2 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
- 3 - 6-32 UNC X 5,55 REF BINDING HEAD TERMINAL SCREW AND CUP WASHER (3 PER BASIC)
- 4 - INTERNAL ADJUSTMENT IS POSSIBLE RESULTING IN CHANGES OF TRAVEL CHARACTERISTICS IN INCREMENTS OF 0,116 mm
- 5 - FOR USE IN TEMPERATURES UP TO 85°C
- 6 - CHARACTERISTICS PERTAIN TO ALL CHARTED LISTINGS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



SCALE 3/4 TO 1

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	0,81/03
ONE PLACE	X,X	0,47/018	0,36/015
TWO PLACES	X,X,X	0,157/008	0,13/005
THREE PLACES	X,X,X,X		
ANGLES			

SI METRIC ☒ US CUSTOMARY ☐

DESIGN UNITS ☒

R&B MATERIAL-COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE

PROTECTIVE COATINGS ARE APPLIED

WEIGHT 1,13 Kg APPROX

CHARACTERISTICS

OPERATING FORCE	4,0 Kg MAX
PRETRAVEL	2,5 mm MAX
DIFFERENTIAL TRAVEL (EACH BASIC)	2,0 mm MAX
OVERTRAVEL	4,75 mm MIN

CONTACT ARRANGEMENT
S P D T
(EACH BASIC)

REVISIONS

A	C054141	17 FEB 78
B	C053444	17 FEB 78
C	C056479	17 FEB 78
D	C057575	17 FEB 78
E	C058369	17 FEB 78
F	C061401	17 FEB 78
G	C077459	17 FEB 78

FO-02851-A

DRAWN

CHECK

GLH

16 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78

17 FEB 78