

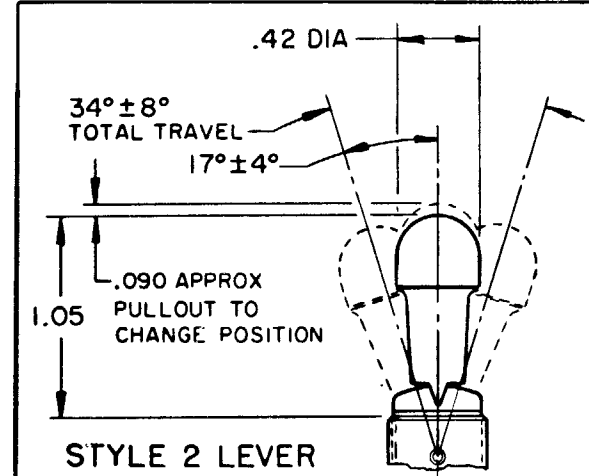
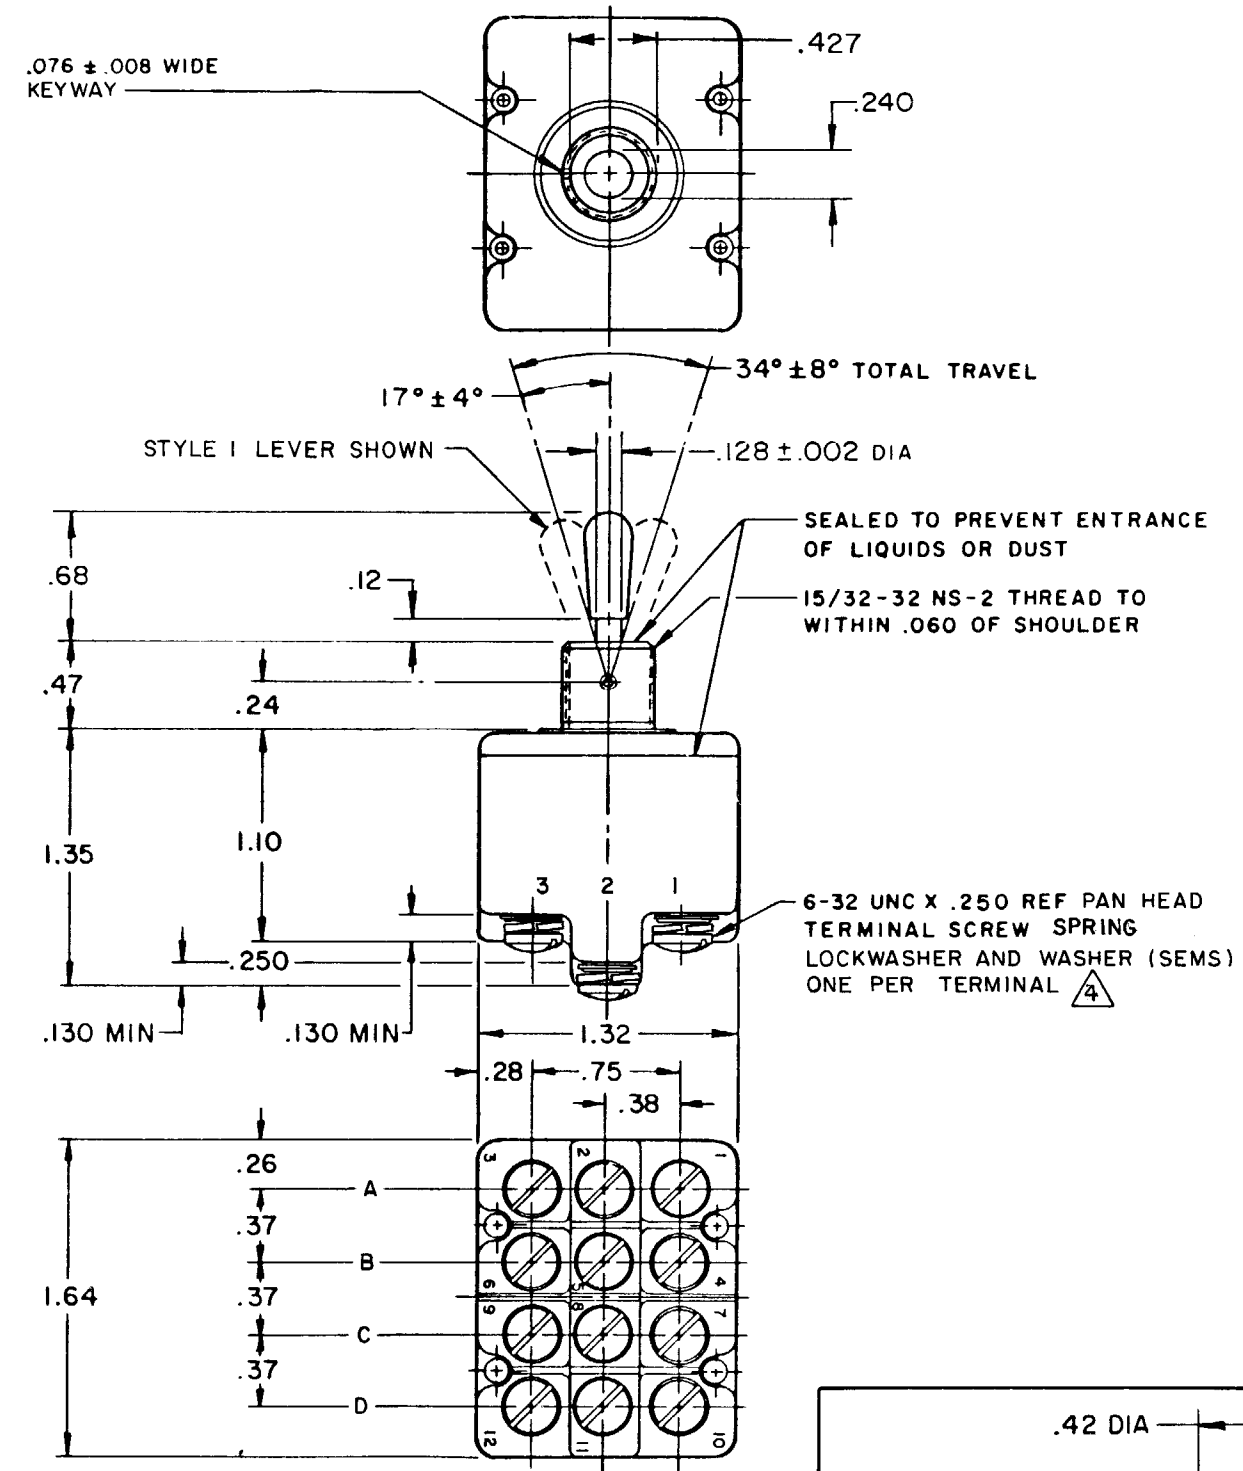
CATALOG LISTING
4TL11-12 SERIES CHART 1
PAGE 1 OF 1
REPLACES
PR-2094
CHECK
17 SEP 71
KAS
DRAWN
MASTER

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929









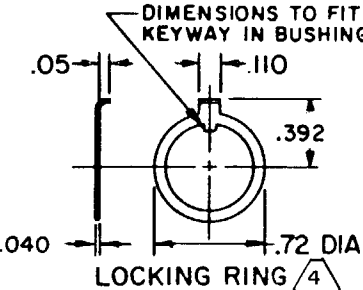

SWITCH-BASIC

CATALOG LISTING
4TL11-12 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CAT. LIST.	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NO.	CURRENT CAPACITY (AMPS)										CONTIN- UOUS
			RESISTIVE LOAD					LAMP	INDUCTIVE				
			DC VOLTS			AC VOLTS		LOAD	LOAD				
30	115	250	115	230	30 VDC	115 VAC	30 VDC	115 VAC					
4TL11-12	NONE	1											
4TL11-12 	A,B,C,D,E,F,G,H,J,K,L,M,N,P	2	20	.75	.5	15	6	5	4	12	15		

"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	"G"  LOCKED IN EXTREME POSITION (KEYWAY SIDE)
"H"  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L"  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)	"M"  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N"  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)
"P"  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)	 LOCKWASHER 				
 LOCKING RING 					
 HEX NUT 					

LEVER ON KEYWAY SIDE	LEVER IN CENTER	LEVER OPPOSITE KEYWAY

- NOTES**
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING, TERMINAL, POLE AND CIRCUIT DESIGNATION MARKED ON SIDE OF SWITCH
 - 3 KEYWAY SHOWN ON LEFT SIDE
 - 4 FURNISHED UNASSEMBLED
 - 5 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
 - 6 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE
- TOGGLE LOCKING, SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE .01 .030
TWO PLACE .001 .015
THREE PLACE .0001 .005
ANGLES .005
WEIGHT