
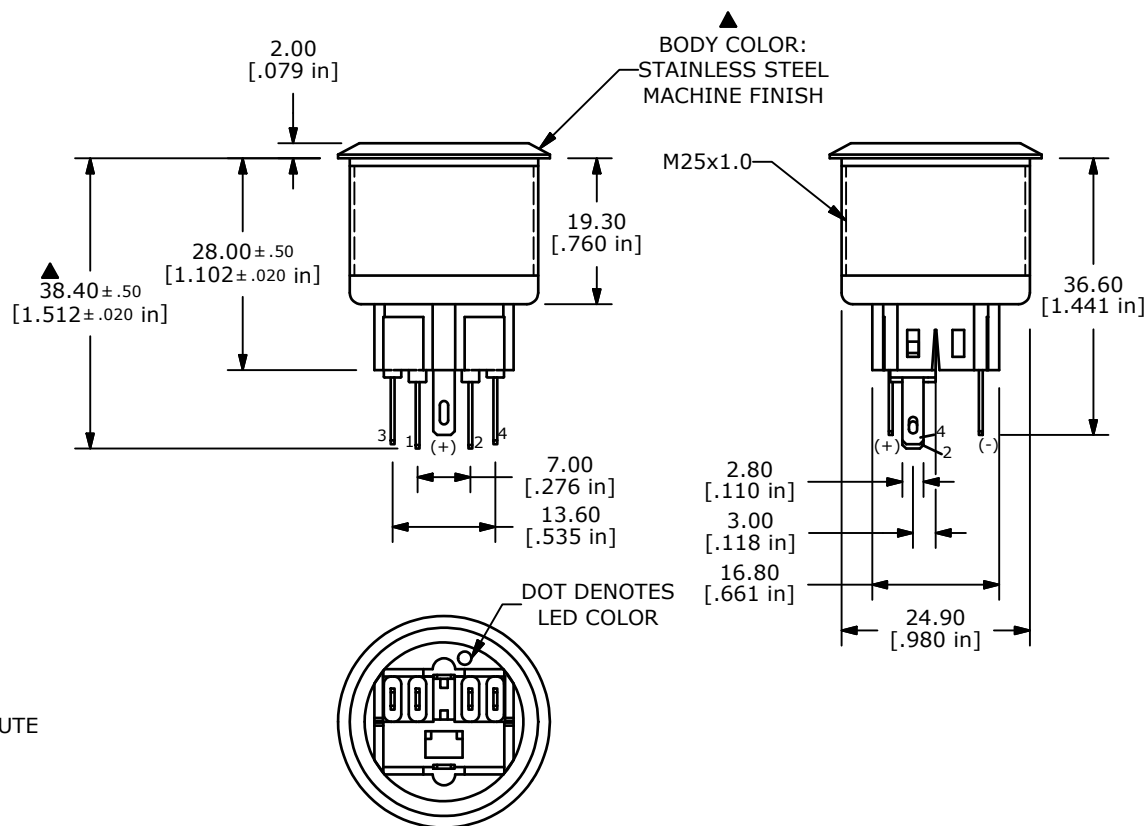




PANEL CUTOUT
MAX. PANEL THICKNESS 10mm

SWITCH FUNCTION ▲	
POS. 1	POS. 2 (MOM)
1-2	3-4

(ON) = MOMENTARY

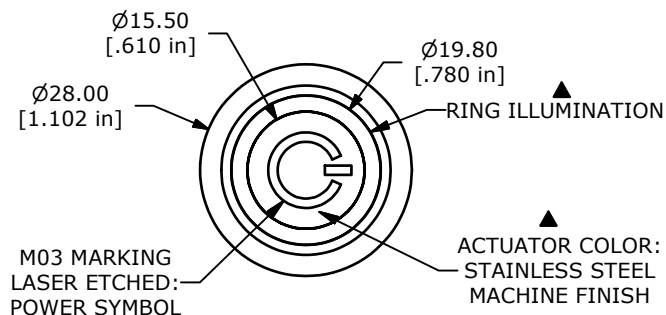

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NOS. FOR REF. ONLY
- FUNCTION: SPDT
- RATING: 2A @ 48VDC
- ILLUMINATION VOLTAGE: 12 V
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000MΩ @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: -20°C TO 70°C
- INGRESS PROTECTION: IP65
- ▲ DENOTES CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT
- ILLUMINATION COLOR: GREEN (FORWARD), GREEN (REVERSE)



TITLE PV8F2Y0SSG-334-M03

B	20417	ADD TERMINATION DIMENSIONS	01/20/12	BMA
A	20243	RELEASE FOR PRODUCTION	10/28/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 1:1	DATE 10/28/2011	DR BGL	DWG 52-PV8S00216	REV B
--------------	--------------------	-----------	---------------------	----------