


## Female Off-The-Shelf

A selection of stocked, female crimp, Datamate Mix-Tek standard layouts.

- ❖ Hexagonal slotted jackscrew style.
- ❖ Crimp tooling on pages 87 to 89.
- ❖ Polarised mouldings.
- ❖ Power contacts rated to 20A, signal to 3A.
- ❖ Mates with connectors on pages 80 and 81.



### POWER CONTACTS ONLY

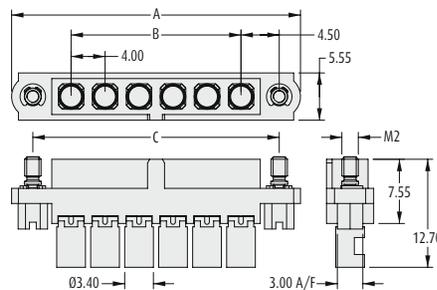

### CALCULATION

<b>A</b>	B + 14
<b>B</b>	(No. of Power contacts - 1) x 4
<b>C</b>	B + 9

### HOW TO ORDER


**M80 - 4000000F1 - XX - 325 - 00 - 000**

Refer to page 76 for stocked sizes.

#### NO. OF POWER CONTACTS

**02, 04, 06, 08, 10**

### SIGNAL AND POWER CONTACTS

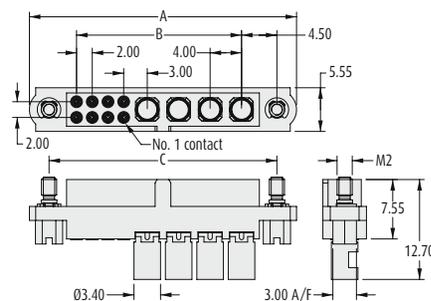

### CALCULATION

<b>A</b>	B + 13
<b>B</b>	(No. of Power contacts - 1) x 4 + Total no. of Signal contacts + 1
<b>C</b>	B + 8

### HOW TO ORDER

**M80 - 4C1 XX 05F1 - XX - 325 - 00 - 000**

Refer to page 76 for stocked sizes.

#### NO. OF SIGNAL CONTACTS

**02, 04, 06, 08, 12**

#### NO. OF POWER CONTACTS

**02, 04**

All dimensions in mm.