



MICRO SWITCH
FREEDPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY - PUSHBUTTON SWITCH

CATALOG LISTING

704PB SERIES CHART I

704PB SERIES
CHART I
PAGE 1 OF 1

M

DRAWING
NUMBER

X2

ISSUE
X6

REPLACES

RELEASE NO. SR 10787

4, MAR '63

LWE

CHECK

4, MAR '63

KAC

CHECK

5, MAY '99

ECO

5, MAY '99

ECO

5, MAY '99

ECO

5, MAY '99



ECO

5, MAY '99

ECO


5, MAY '99

ECO

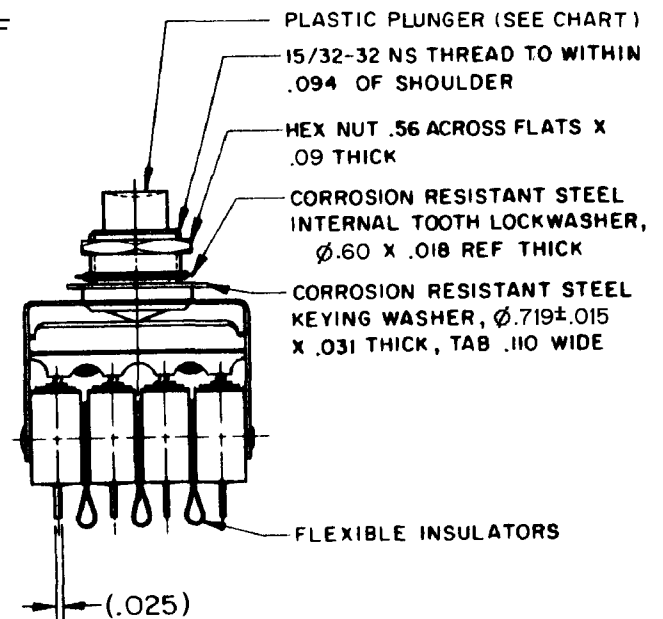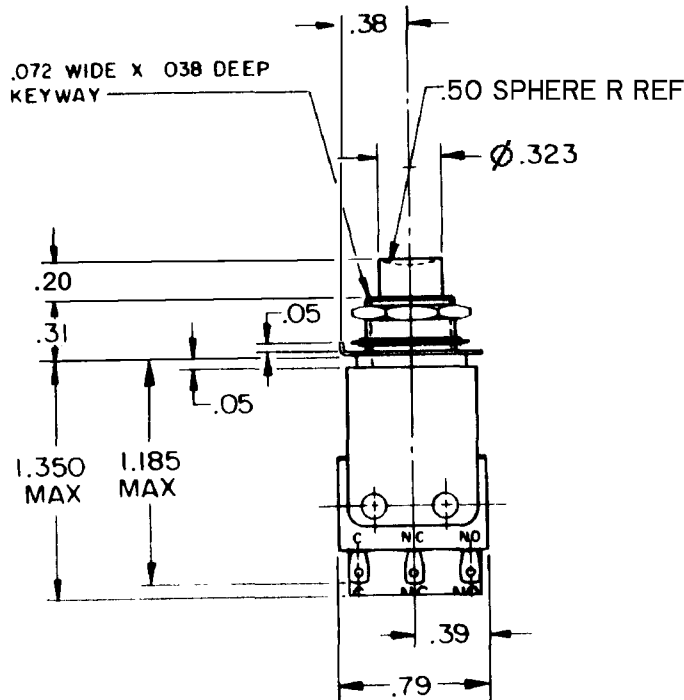

NOTE -

- 1 - UNIT INCLUDES "HM TYPE" BASIC SWITCH (4)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCHES DO NOT NECESSARILY
OPERATE SIMULTANEOUSLY

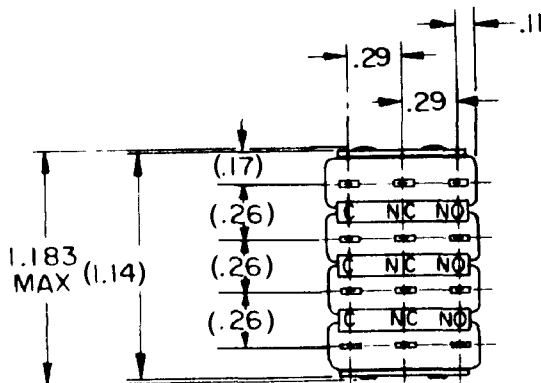

CATALOG LISTINGS	PLUNGER COLOR	RELEASE NO.
704PB1	BLACK	SR 10787
704PB2	RED	SR 10787
704PB3	GREEN	SR 10787

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 35 OZ APPROX
TOTAL TRAVEL - - - - - .100 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (4)

115 VOLTS AC RATING
400 CPS

INDUCTIVE - - - - - 2 AMP
RESISTIVE - - - - - 2 AMP

28 VOLTS DC RATING

INDUCTIVE - - - - - 3 AMP
RESISTIVE - - - - - 5 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .064 LB APPROX

RASTER

FO-50378

DRAWN

OMW

4 FEB 63

CHECK