
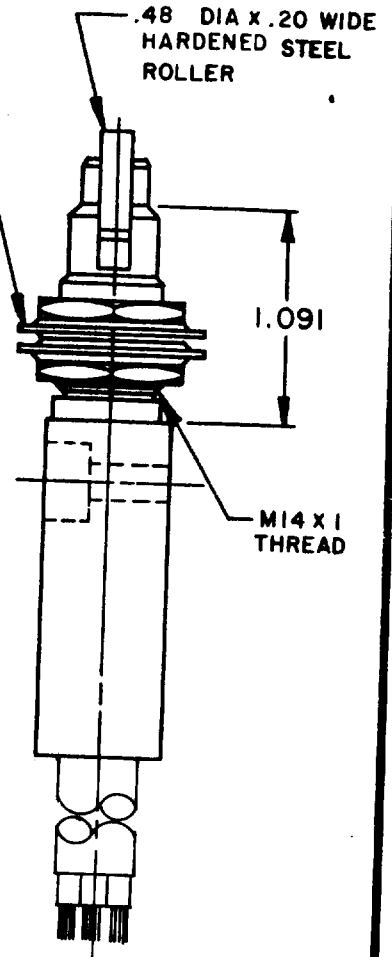
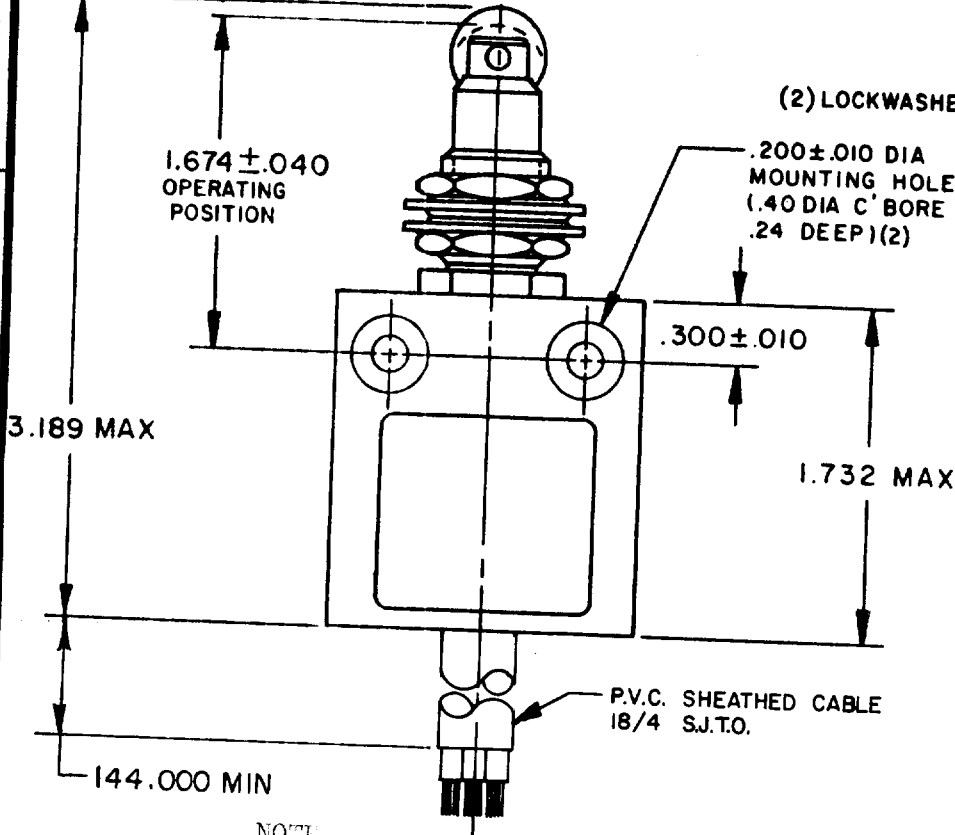


MICRO SWITCH


FREEMONT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL INC.
FED. MFG. CODE 91929

SMALL PRECISION LIMIT SWITCH

CATALOG LISTING
914CE28-12

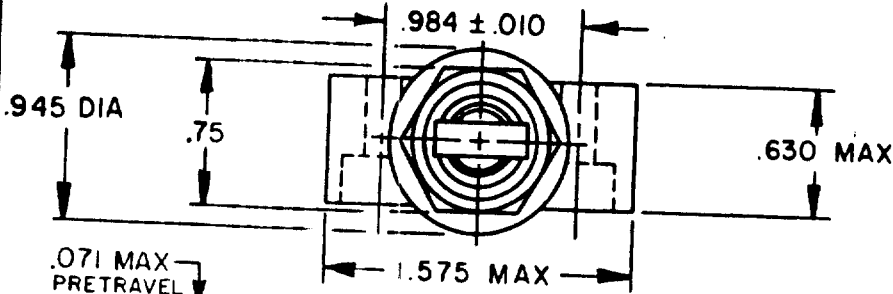

- NOTE
1 - ZINC HOUSING FINISHED WITH GREY PAINT
2 - SWITCH MOUNTS THRU A .571 DIA HOLE
3 - .165 MAX PANEL THICKNESS



CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE-- 2 LBS, 10 1/2 OZ MAX
RELEASE FORCE----- 1 LB MIN
DIFFERENTIAL TRAVEL ----- .004 MAX
OVERTRAVEL ----- .118 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED-HONEYWELL LTD
FILE E41859
5A - 250 VAC
1/10 HP - 125 OR 250 VAC
LR-15775

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

RAW MATERIAL - COMMERCIAL STANDARD

DIMENSIONS ARE IN INCHES AND ARE
TO BE MET BEFORE PROTECTIVE
COATINGS ARE APPLIED

MICRO SWITCH STANDARDS APPLY

WEIGHT



M 914CE28-12

DRAWING
NUMBER

ISSUE

REPLACES

RELEASE NO. PR-15181

CHECK

CHECK

12 NOV 86

CEC

86

NOV

JAS

FO-52648-B

DRAWN