
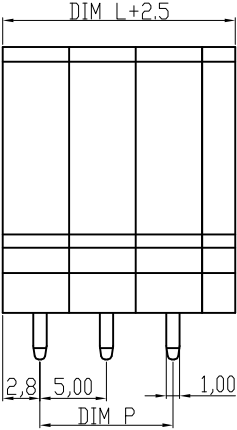
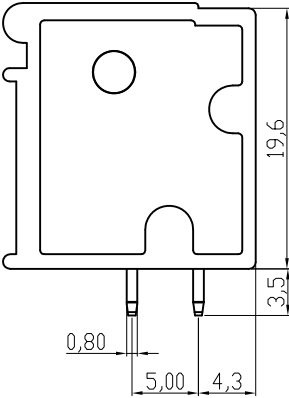
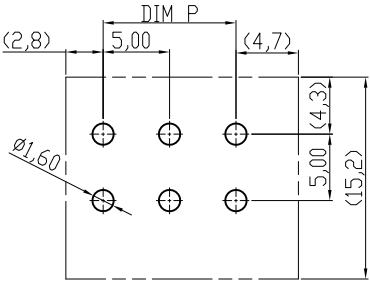


	1	2	3	4	5	6	7																																																																											
A	Material Terminal body(metal housing): steel stamped Terminal screw: Steel Zinc plating "-" slot type Contacts: Brass Surfaces of solder tail: Tin plated Insulator(housing): NL66(UL94V-0) , GREEN Electrical cULus Voltage rating: 300VAC Current rating: 20A Wire range: Solid wire(AWG): 12-22 Stranded wire(AWG): 12-22 Torque(Lb-In): 2.4 Screw: M2.5 Wire strip length: 10-11mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:     DIMENSION <table><tr><td>L</td><td>Nx5.0</td></tr><tr><td>P</td><td>(N-1)x5.0</td></tr></table> N=Number of poles <table><tr><th>Poles</th><th colspan="2">Tolerance</th></tr><tr><td></td><th>DIM L</th><th>DIM P</th></tr><tr><td>2p-6p</td><td>±0.20</td><td>±0.15</td></tr><tr><td>7p-12p</td><td>±0.25</td><td>±0.20</td></tr><tr><td>13p-18p</td><td>±0.30</td><td>±0.25</td></tr><tr><td>19p-24p</td><td>±0.40</td><td>±0.30</td></tr></table>							L	Nx5.0	P	(N-1)x5.0	Poles	Tolerance			DIM L	DIM P	2p-6p	±0.20	±0.15	7p-12p	±0.25	±0.20	13p-18p	±0.30	±0.25	19p-24p	±0.40	±0.30	A																																																				
L								Nx5.0																																																																										
P								(N-1)x5.0																																																																										
Poles								Tolerance																																																																										
								DIM L	DIM P																																																																									
2p-6p	±0.20	±0.15																																																																																
7p-12p	±0.25	±0.20																																																																																
13p-18p	±0.30	±0.25																																																																																
19p-24p	±0.40	±0.30																																																																																
B	B																																																																																	
C	C																																																																																	
D	D																																																																																	
E	E																																																																																	
F	 RECOMMENDER PCB LAYOUT							F																																																																										
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="3">19.04.2010</td><td rowspan="3">Hellwig</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawing-No.</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td rowspan="2"></td><td rowspan="2">ASS 4098 CO</td><td>rev00</td></tr><tr><td></td><td></td><td>Ⓢ</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td>Replace</td><td>Sheet</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td><td></td></tr></table>							Scale	1:1					Date	Name	Customer-No.	TOLERANCE						Drawn	19.04.2010	Alex	X.	±0.50					Approved	19.04.2010	Hellwig	X.X	±0.30					X.XX	±0.10					DIM	TOL							Drawing-No.	X.°	±1°						ASS 4098 CO	rev00			Ⓢ	Drawn	19.04.2010	Alex	Replace	Sheet	Angle	TOL	Id.	Modification	Date	Name				G
Scale								1:1					Date	Name	Customer-No.																																																																			
TOLERANCE						Drawn	19.04.2010	Alex																																																																										
X.	±0.50					Approved	19.04.2010	Hellwig																																																																										
X.X	±0.30																																																																																	
X.XX	±0.10																																																																																	
DIM	TOL							Drawing-No.																																																																										
X.°	±1°						ASS 4098 CO	rev00																																																																										
		Ⓢ	Drawn	19.04.2010	Alex			Replace	Sheet																																																																									
Angle	TOL	Id.	Modification	Date	Name																																																																													
H								H																																																																										
	1	2	3	4	5	6	7																																																																											