



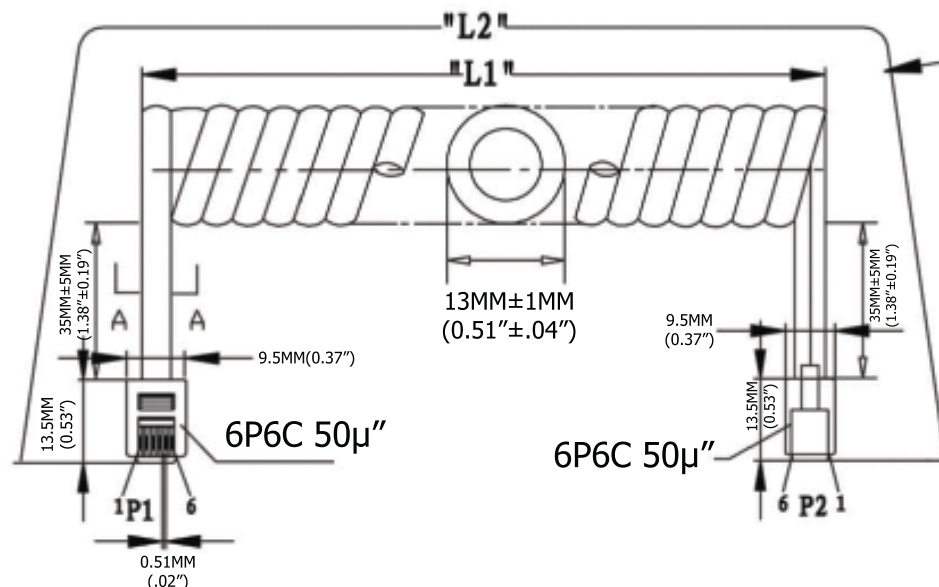

Extended length is with 500g of force

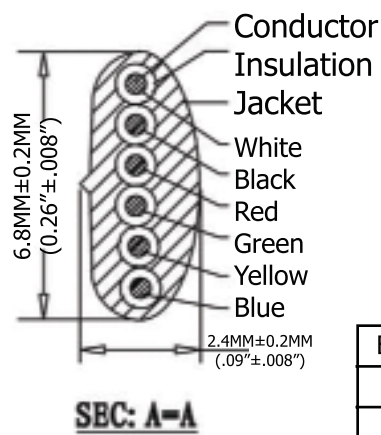

P1		P2
1	WHITE	6
2	BLACK	5
3	RED	4
4	GREEN	3
5	YELLOW	2
6	BLUE	1

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	134.0 Inches
7,620.0MM-8,763.0MM	3,403.6MM

Scale	1:1							Name
TOLERANCE						Drawn	11.02.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

RoHS Complaint

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AT-C-26-6/6/W-25-R

Title

NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM,
Standard Plug, 50μ" of contact plating, WHITE

Drawing No.	
-------------	--

rev00

Replace

	Sheet
--	-------