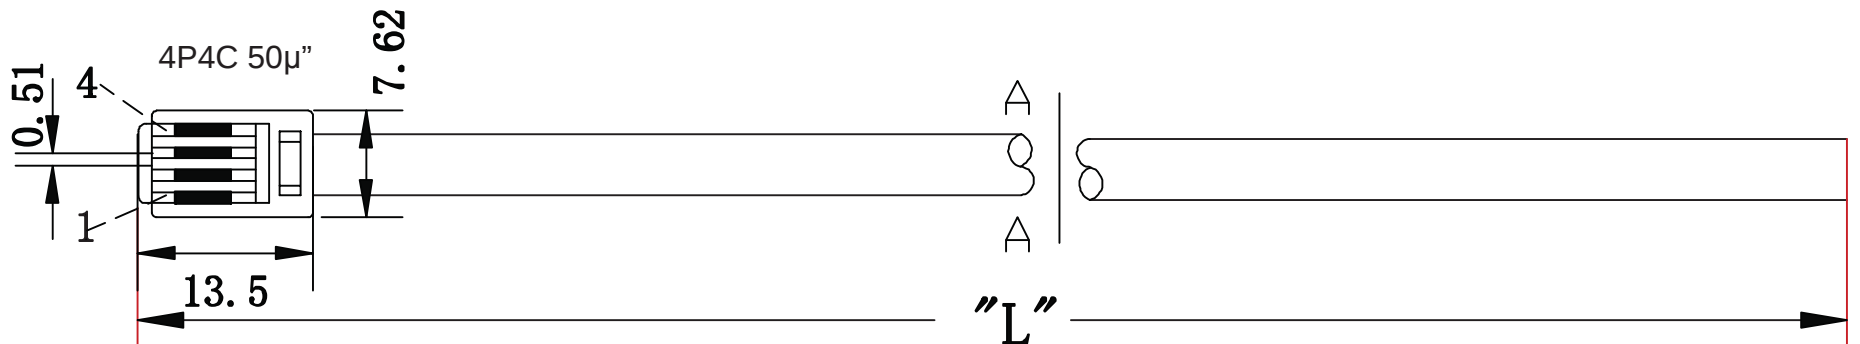


	1	2	3	4	5	6	7																																																																																																					
A									A																																																																																																			
B									B																																																																																																			
C	P1 Conductor: [26AWG(0.16/7)Bare Copper]x4C Insulation: [PP6331 ID:0.95±0.03]x4C Jacket: PVC NOUL 65P Black Red Green Yellow 4.8±0.2 2.4±0.2 <u>SEC:A-A</u> <table><tr><td>P1</td><td></td><td>P2</td></tr><tr><td>1</td><td>BLACK</td><td>1</td></tr><tr><td>2</td><td>RED</td><td>2</td></tr><tr><td>3</td><td>GREEN</td><td>3</td></tr><tr><td>4</td><td>YELLOW</td><td>4</td></tr></table> Note: - Material: Housing-polycarbonate, clear - Terminal-0.36[.014] thick phosphor bronze. - Thick gold in localized gold plate. - Area, Gold Flash over the remainder. - Over 2.54mm[.000100] thick nickel underplate. <table><thead><tr><th>Part Number</th><th>Drawing Number</th><th>Wire Length "L"</th><th>Jacket Color</th><th>Cut Length</th></tr></thead><tbody><tr><td>AT-S-26-4/4/B-5-OE-R</td><td>A</td><td>1,525±20(5ft)</td><td>Black</td><td>1,525-1,535mm</td></tr><tr><td>AT-S-26-4/4/B-7-OE-R</td><td>B</td><td>2,135±30(7ft)</td><td>Black</td><td>2,135-2,145mm</td></tr><tr><td>AT-S-26-4/4/B-10-OE-R</td><td>C</td><td>3,050±60(10ft)</td><td>Black</td><td>3,050-3,060mm</td></tr><tr><td>AT-S-26-4/4/B-12-OE-R</td><td>D</td><td>3,660±60(12ft)</td><td>Black</td><td>3,660-3,670mm</td></tr><tr><td>AT-S-26-4/4/B-14-OE-R</td><td>E</td><td>4,270±60(14ft)</td><td>Black</td><td>4,270-4,280mm</td></tr><tr><td>AT-S-26-4/4/B-25-OE-R</td><td>F</td><td>7,625±100(25ft)</td><td>Black</td><td>7,625-7,635mm</td></tr><tr><td>AT-S-26-4/4/B-50-OE-R</td><td>G</td><td>15,250±150(50ft)</td><td>Black</td><td>15,250-15,260mm</td></tr></tbody></table> 120±10 A, B, C, D 140±10 E, F, G								P1		P2	1	BLACK	1	2	RED	2	3	GREEN	3	4	YELLOW	4	Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length	AT-S-26-4/4/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm	AT-S-26-4/4/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm	AT-S-26-4/4/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm	AT-S-26-4/4/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm	AT-S-26-4/4/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm	AT-S-26-4/4/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm	AT-S-26-4/4/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm	C																																												
P1		P2																																																																																																										
1	BLACK	1																																																																																																										
2	RED	2																																																																																																										
3	GREEN	3																																																																																																										
4	YELLOW	4																																																																																																										
Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length																																																																																																								
AT-S-26-4/4/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm																																																																																																								
AT-S-26-4/4/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm																																																																																																								
AT-S-26-4/4/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm																																																																																																								
AT-S-26-4/4/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm																																																																																																								
AT-S-26-4/4/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm																																																																																																								
AT-S-26-4/4/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm																																																																																																								
AT-S-26-4/4/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm																																																																																																								
D									D																																																																																																			
E									E																																																																																																			
F									F																																																																																																			
G	Unit: mm RoHS Compliant <table><thead><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Title</th></tr></thead><tbody><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>28.06.13</td><td>Wilson</td></tr><tr><td>X.</td><td>±X</td><td></td><td></td><td></td><td></td><td>Approved</td><td>28.06.13</td><td>Groll</td></tr><tr><td>X.X</td><td>±X</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±X</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±X°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±X°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="3">Replace</td></tr></tbody></table> ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us <table><thead><tr><th colspan="2">Title</th></tr></thead><tbody><tr><td colspan="2">Modular cable - Straight/Open</td></tr><tr><td colspan="2">4P4C 50µ", 26AWG, Black, 5-50 feet</td></tr><tr><td colspan="2">ASSMANN WSW-No.</td></tr><tr><td colspan="2">AT-S-26-4/4/B-xx-OE-R</td></tr><tr><td colspan="2">Drawing-No.</td></tr><tr><td colspan="2">rev00</td></tr><tr><td colspan="2">Sheet</td></tr><tr><td colspan="2">1/1</td></tr></tbody></table>								Scale	Free					Date	Name	Title	TOLERANCE						Drawn	28.06.13	Wilson	X.	±X					Approved	28.06.13	Groll	X.X	±X								X.XX	±X								DIM	TOL								X.°	±X°								X.X°	±X°								Angle	TOL	Id.	Modification	Date	Name	Replace			Title		Modular cable - Straight/Open		4P4C 50µ", 26AWG, Black, 5-50 feet		ASSMANN WSW-No.		AT-S-26-4/4/B-xx-OE-R		Drawing-No.		rev00		Sheet		1/1		G
Scale	Free					Date	Name	Title																																																																																																				
TOLERANCE						Drawn	28.06.13	Wilson																																																																																																				
X.	±X					Approved	28.06.13	Groll																																																																																																				
X.X	±X																																																																																																											
X.XX	±X																																																																																																											
DIM	TOL																																																																																																											
X.°	±X°																																																																																																											
X.X°	±X°																																																																																																											
Angle	TOL	Id.	Modification	Date	Name	Replace																																																																																																						
Title																																																																																																												
Modular cable - Straight/Open																																																																																																												
4P4C 50µ", 26AWG, Black, 5-50 feet																																																																																																												
ASSMANN WSW-No.																																																																																																												
AT-S-26-4/4/B-xx-OE-R																																																																																																												
Drawing-No.																																																																																																												
rev00																																																																																																												
Sheet																																																																																																												
1/1																																																																																																												
H									H																																																																																																			
	1	2	3	4	5	6	7																																																																																																					