
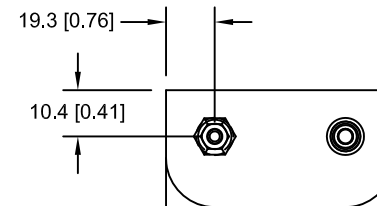


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/31/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

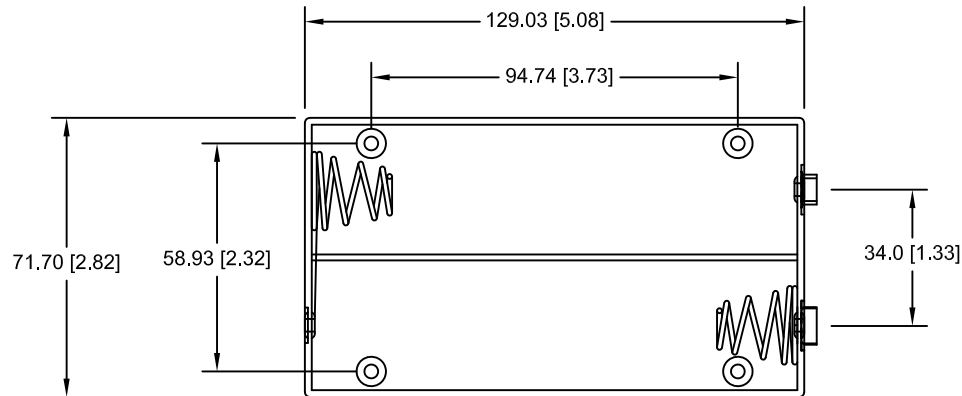

NOTES:

SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
TEMPERATURE RANGE: -10°C to +100°C
RIVETS: BRASS, NICKLE PLTD.
SPRING: SPRING STEEL, NICKLE PLTD.
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
ROHS 2 COMPLIANT

Tolerance (Except as noted)	<div><div><div></div><div></div><div></div></div><div>MPD</div></div> Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title 4 "D" CELL HOLDER WITH SOLDER LUGS		
Angular ± 3°	Date 5/31/13	Drawing Number BC24DSF	