MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
BZE6-2RQ7

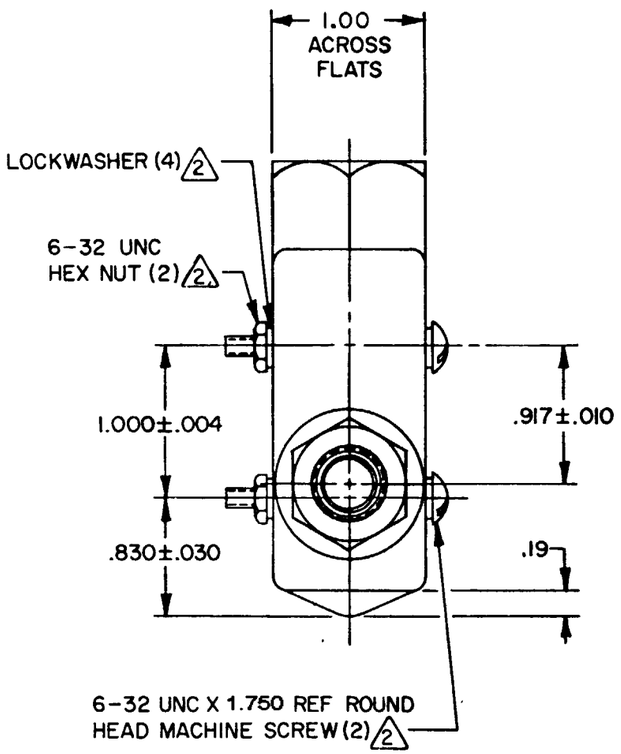

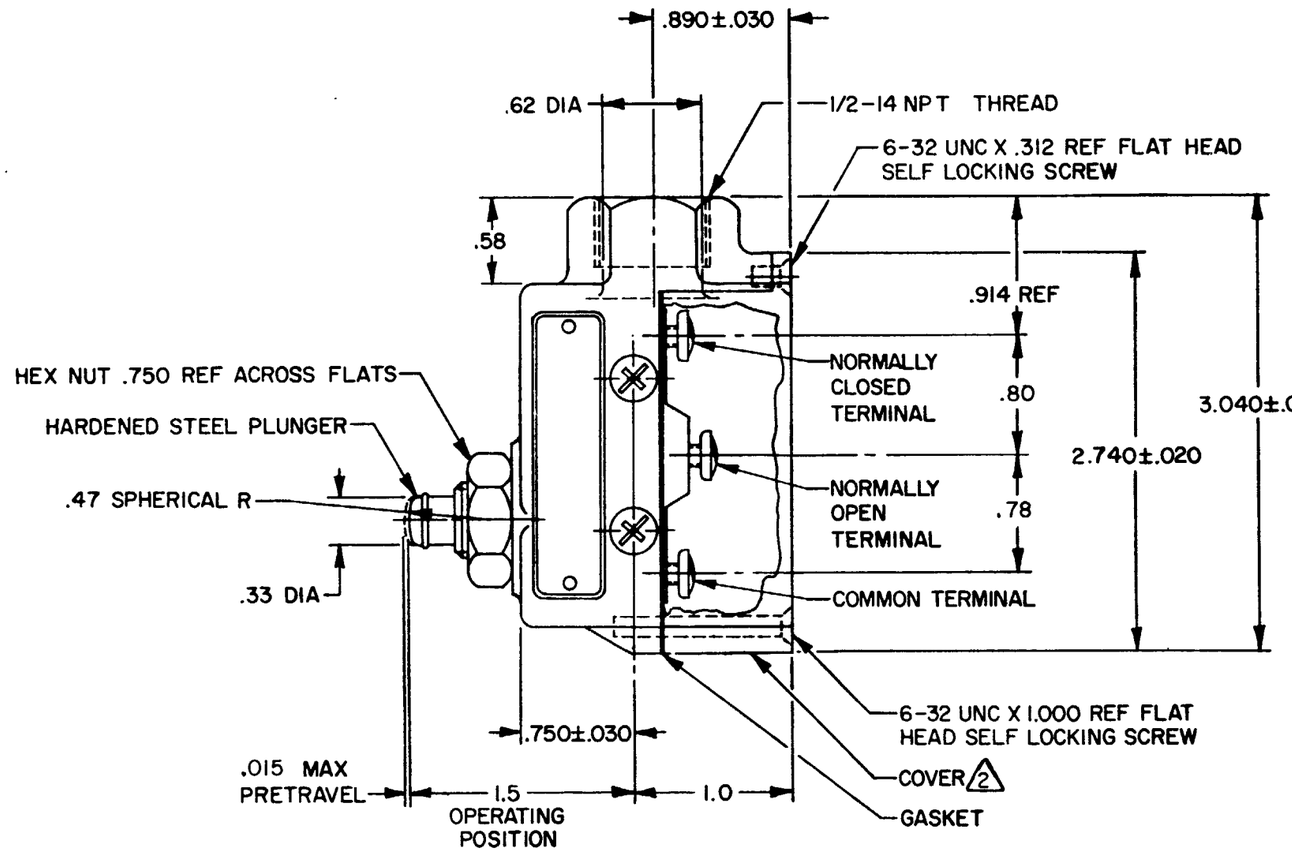

NOTES –

1 – 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3) FURNISHED UNASSEMBLED
2
3 – SEAL RATING: NEMA1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	3-5 OZ
RELEASE FORCE	2 1/2 OZ MIN
DIFFERENTIAL TRAVEL	.002 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BZ-2RQ733

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

CODE L9 10A–125, 250 OR 480 VAC
1/2A-125 VDC; 1/4A-250 VDC

CE 1.5A, 240 Vac

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES

WEIGHT .53 LB

DRAWING NUMBER M BZE6-2RQ7
REPLACES
RELEASE NO. PR-7339
29AUG07
ISSUE 9 PSR

REVISIONS			
A	C038200	J A L 29 AUG 77	2 SEP 77
B	PR 7339	T M M 9 AUG 78	ROB
C	C053191-G	CJH 2 MAY 84	
D	C055989	JAS 6 NOV 84	CHECK
E	C054958	G J W 11 MAR 85	77 SEP
F	C072618	LJF 14 SEP 92	2
G	0016894	KRB 10 NOV 05	K P K
H	0033014	BS 29AUG07	CHECK

DRAWN J A L 29 AUG 77
RASTER FO-5285 I-A