MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH — ENCLOSED

CATALOG LISTING
DTF2-2RQ9-LH

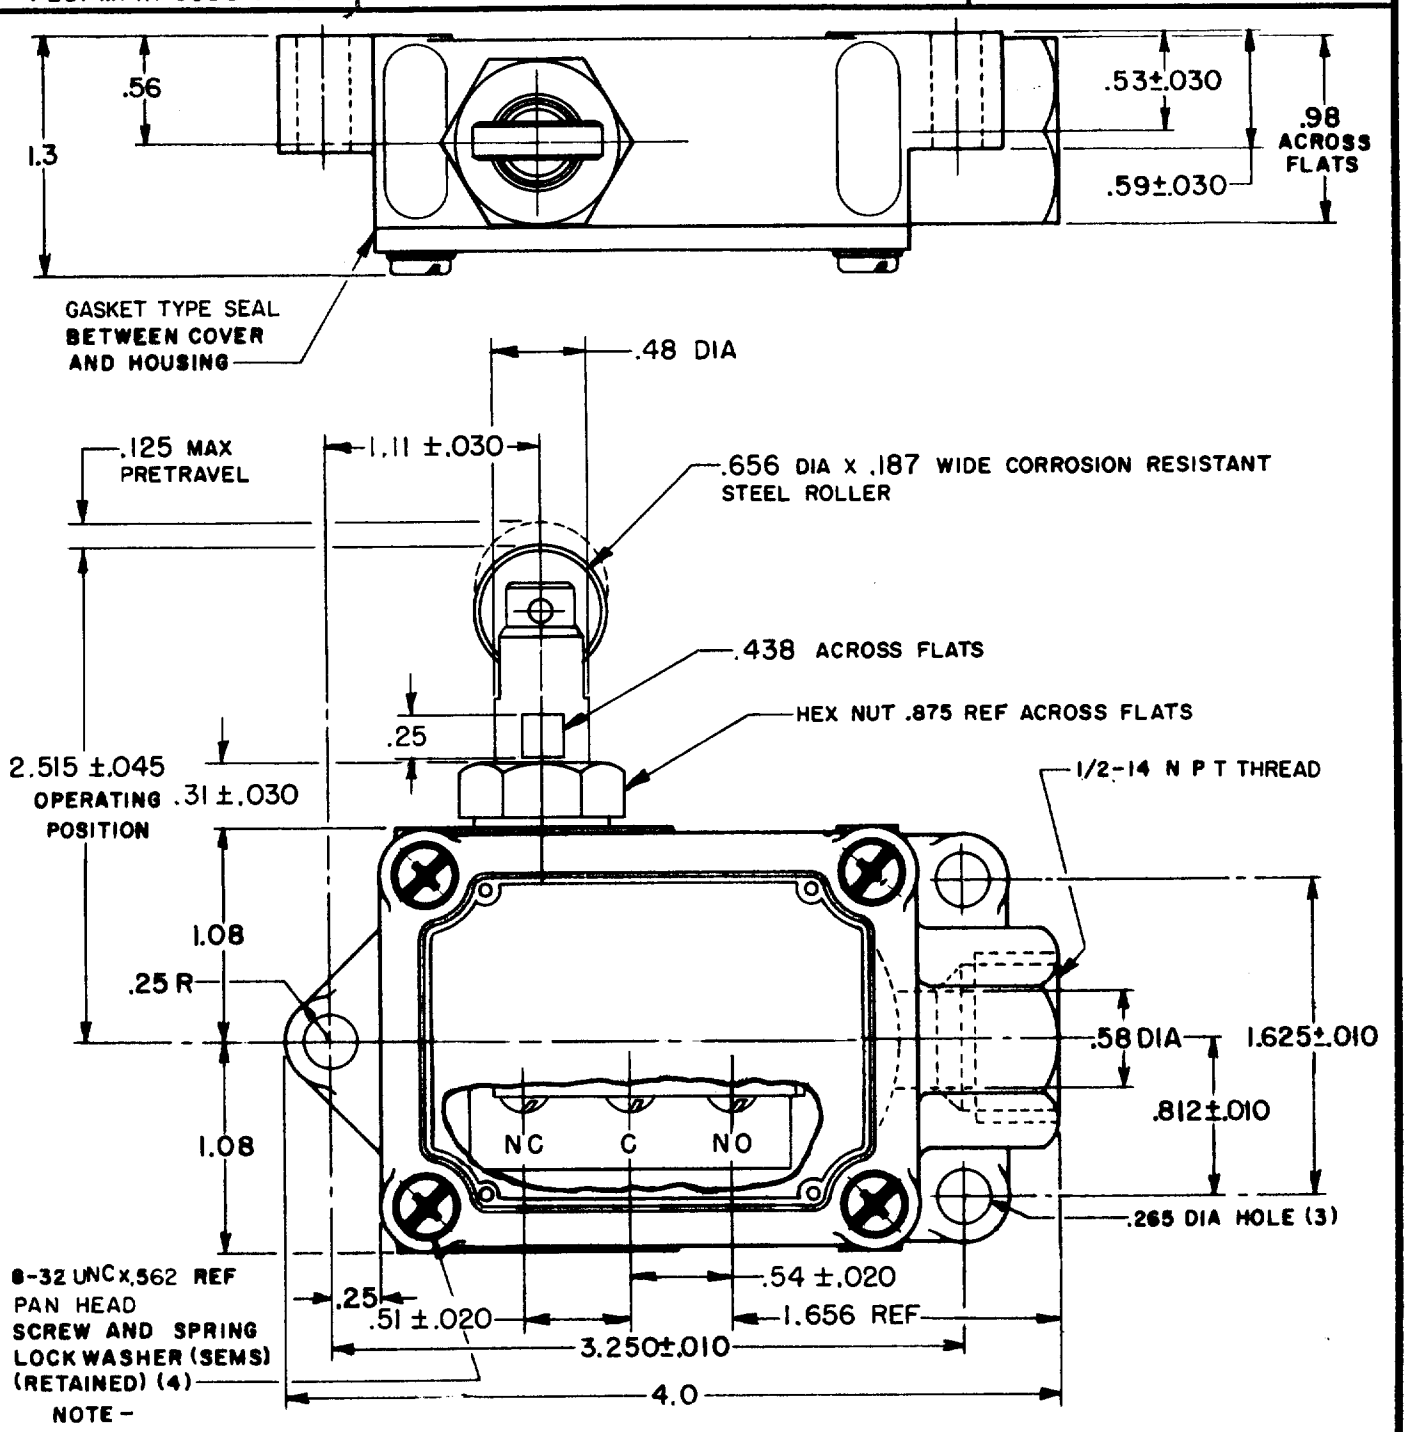

NOTE –

1 - ROLLER PLUNGER ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
2 - 4-40 NC X .125 REF LONG ROUND HEAD TERMINAL SCREW AND LOCKWASHER (6)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE – – – – – 2 1/2 LB MAX

RELEASE FORCE – – – – – – – – 1/4 LB MIN

DIFFERENTIAL TRAVEL – – – – – .060 MAX

OVERTRAVEL – – – – – – – – – – – .125 MIN

SWITCH – BASIC REPLACEMENT – – – DT-2R3-A7

ELECTRICAL DATA

CONTACT ARRANGEMENT	BREAK DISTANCE
D P D T	.020 MIN

-L59- 10 A-125 OR 250 VAC
0.3 A-125 VDC ; 0.15 A-250 VDC

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

(M)DTF2-2RQ9 ISSUE 4
REPLACES
RELEASE NO.
M DTF2-2RQ9-LH
DRAWING NUMBER
ISSUE 11

REVISIONS

A	CO 9600	K.L.B. 27, FEB '59	
B	CO 46992-C	CJH 9 OCT 80	14FEB06
C	CO 51000-C	CJH 18 OCT 83	BP
D	C054997	TSK 3 MAY 86	
E	C071134	TSM 27 SEP 91	
F	C072788	G J W 14 SEP 92	27FEB59
G	0018962	VKR 14FEB06	KFM

CHECK
DRAWN K. L. B. 27, FEB '59
FO-50378