

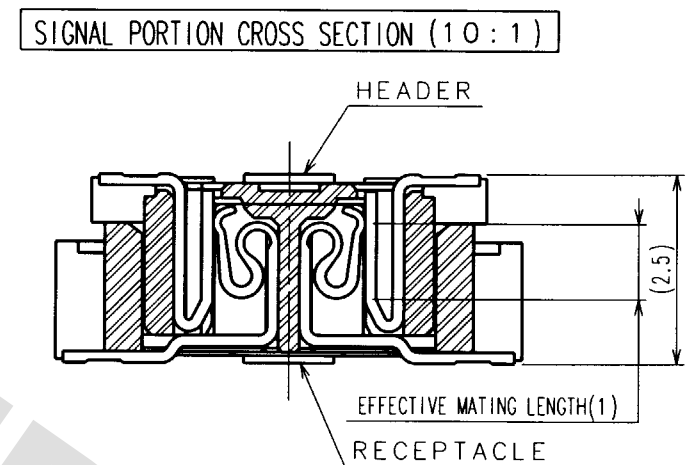


TO
PCK

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL					
		LEAD: GOLD FLASH OVER NICKEL					
1	LCP	BEIGE	UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			J. Matsukawa 00.04.28	J. Matsukawa 00.04.28	H. Okawa 00.04.28	T. Yoshimura 00.05.09	
		DRAWING NO.		PART NO.			
SCALE 5 : 1		EDC3-152613		FX11B-80P-SV			
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.		CODE NO.			1 / 1
				CL573-0558-4			

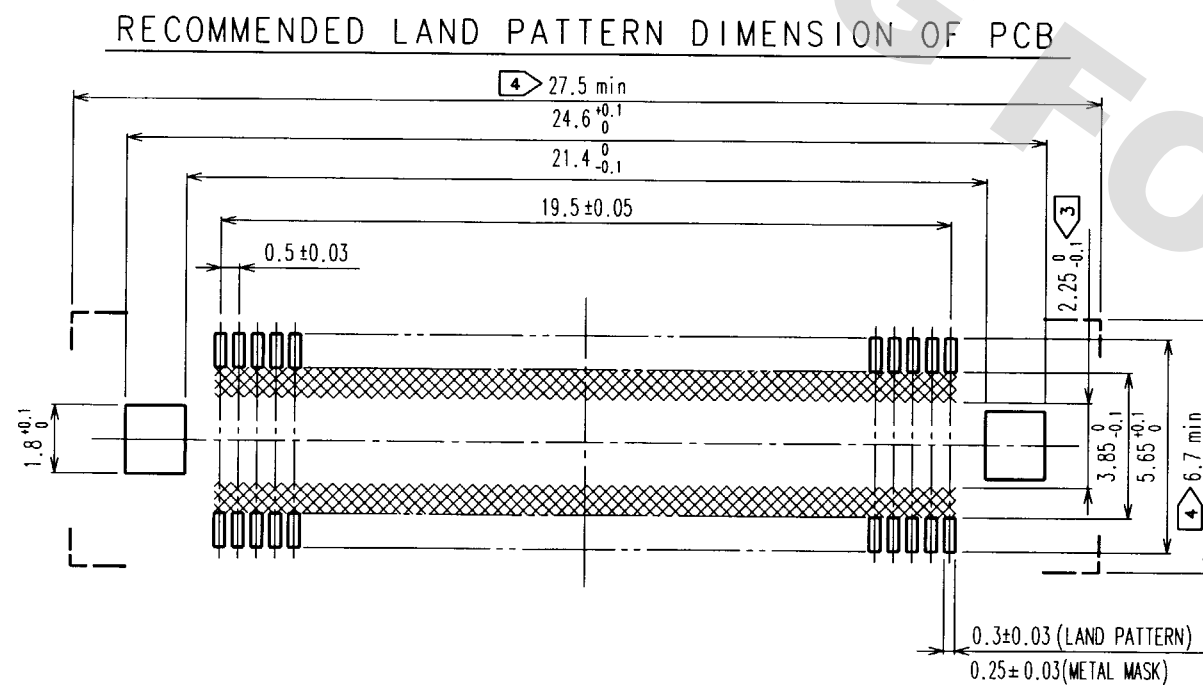

NOTES 1 SMT LEAD-COPLANARITY:0.1 MAX.
2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR
LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
⑤ DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR
CANNOT BE MATED.