


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

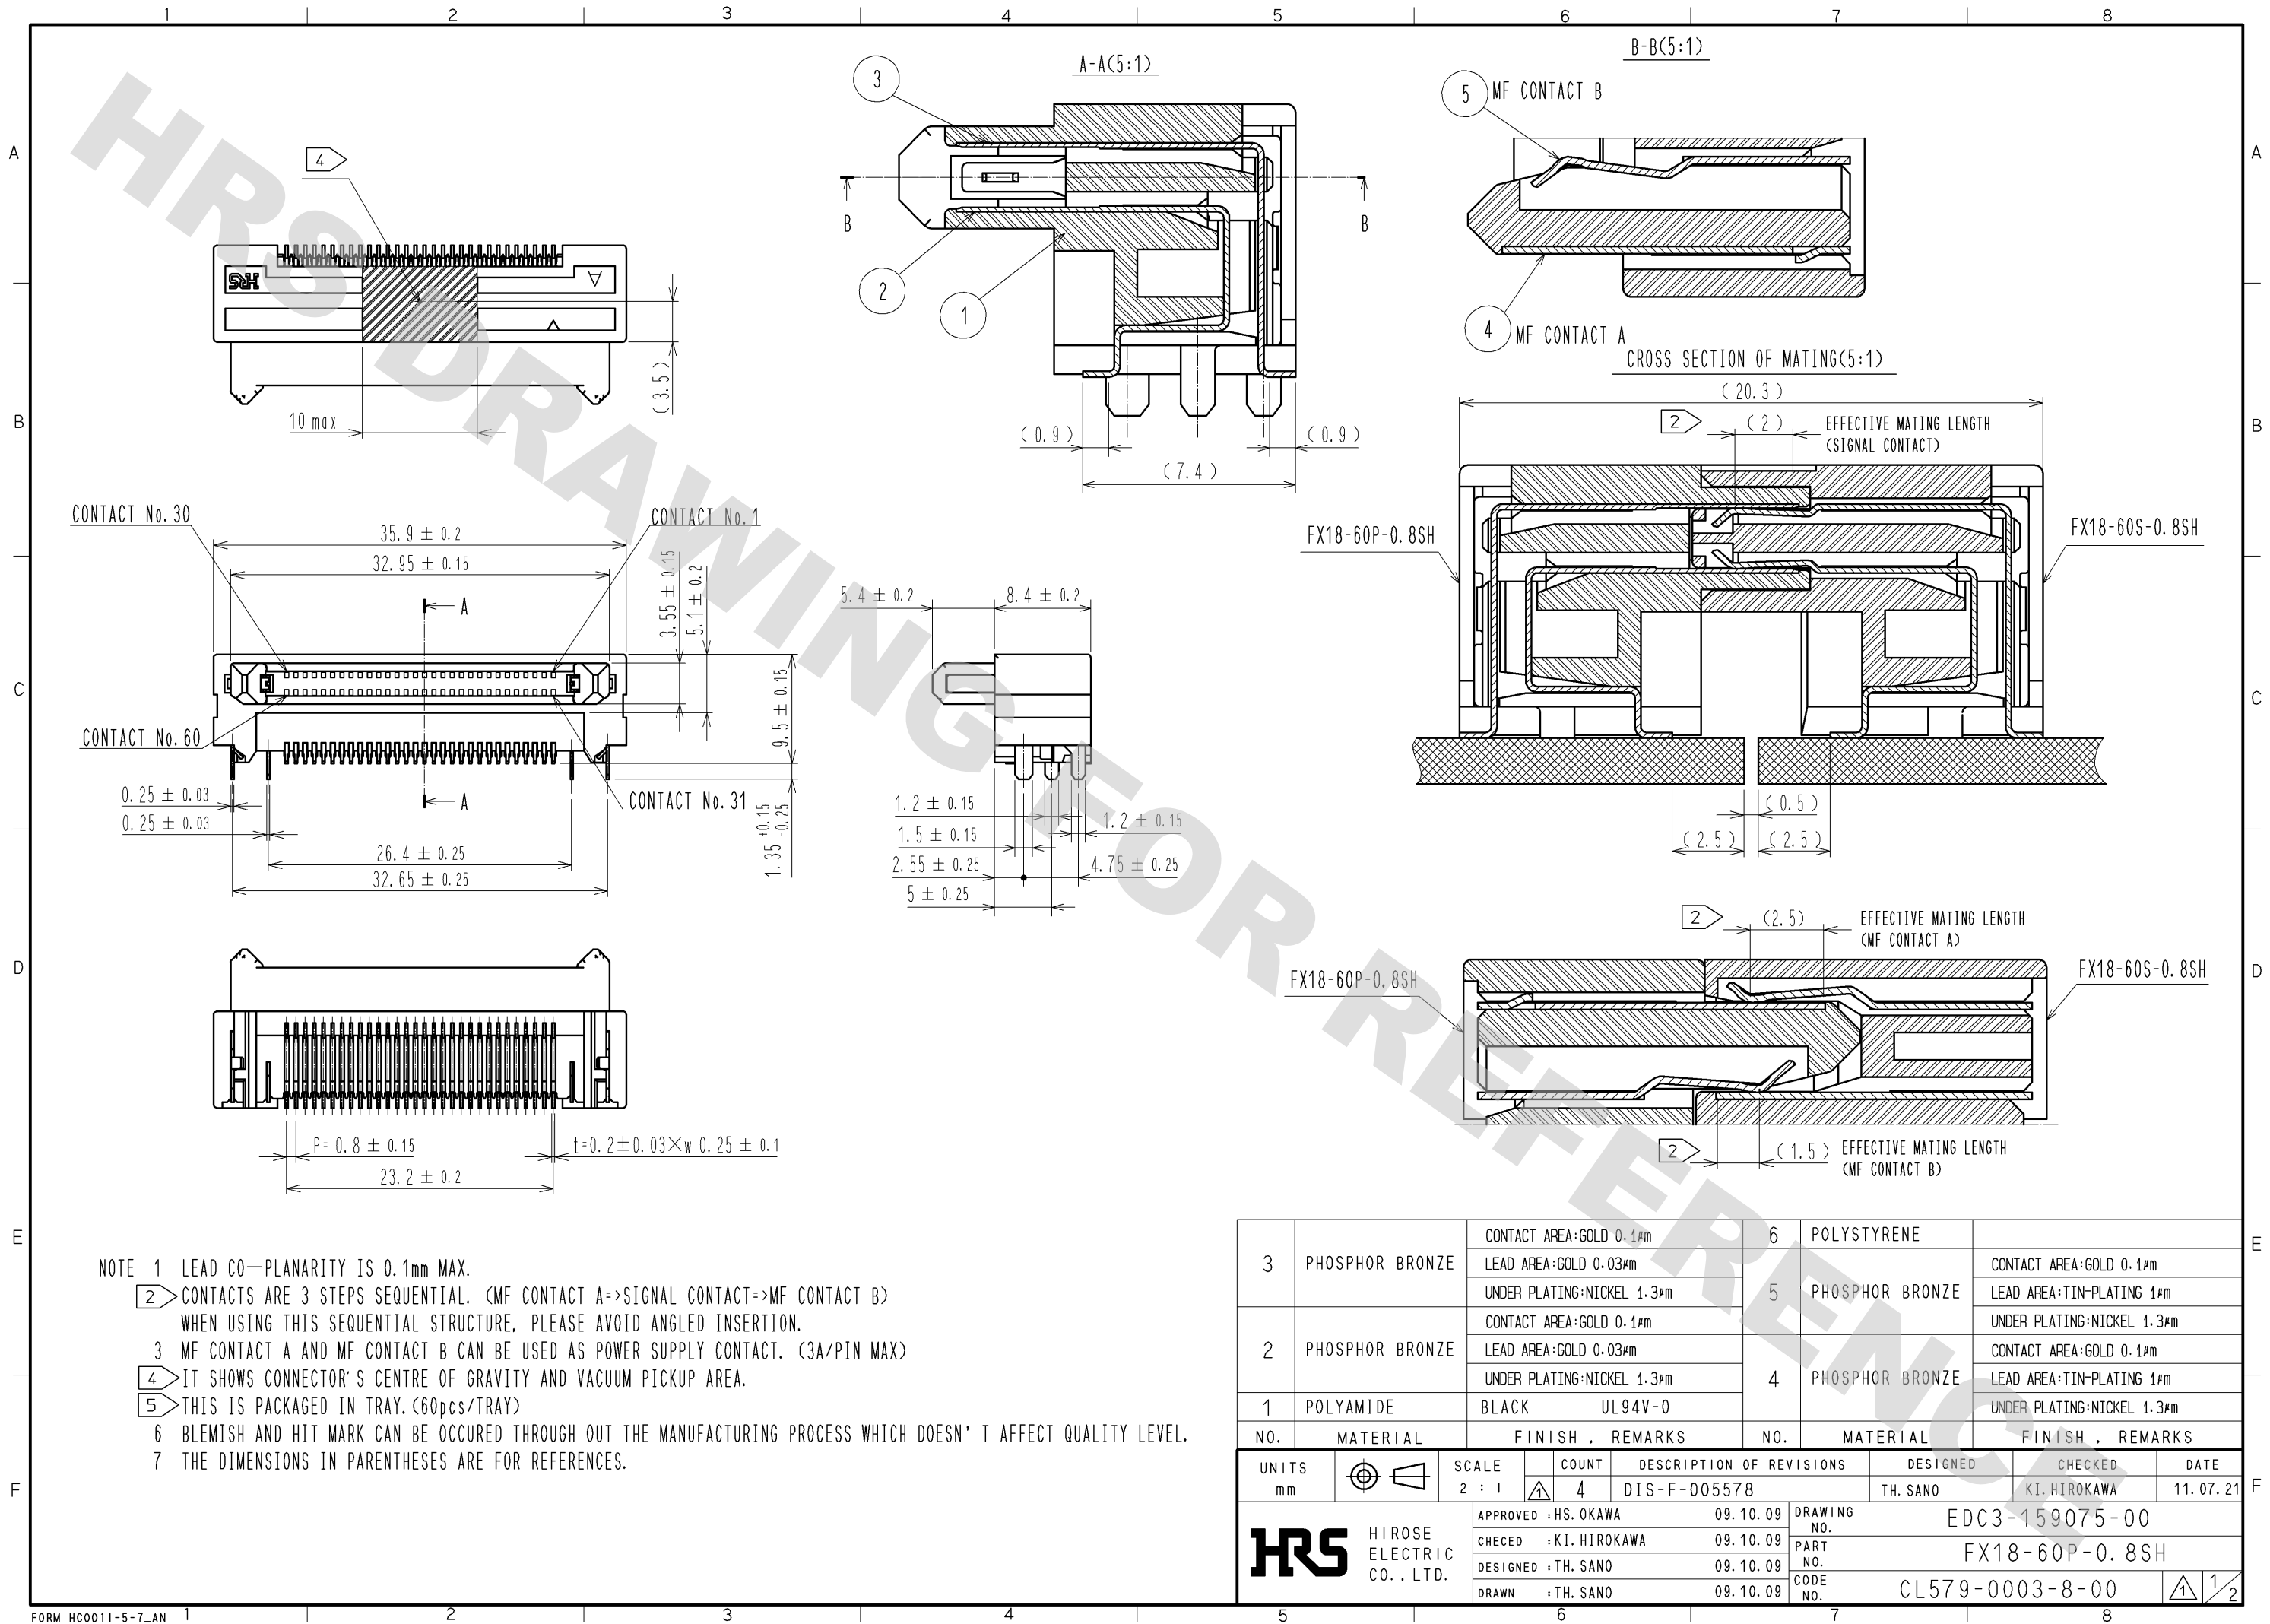

NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.
2 CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.
3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
4 IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.
5 THIS IS PACKAGED IN TRAY. (60pcs/TRAY)
6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm	6	POLYSTYRENE	
		LEAD AREA:GOLD 0.03μm	5	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm
		UNDER PLATING:NICKEL 1.3μm			LEAD AREA:TIN-PLATING 1μm
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm			UNDER PLATING:NICKEL 1.3μm
		LEAD AREA:GOLD 0.03μm	4	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm
		UNDER PLATING:NICKEL 1.3μm			LEAD AREA:TIN-PLATING 1μm
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.3μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-F-005578	DESIGNED TH. SANO
		APPROVED : HS. OKAWA	09.10.09	DRAWING NO.	EDC3-159075-00
		CHECED : KI. HIROKAWA	09.10.09	PART NO.	FX18-60P-0.8SH
		DESIGNED : TH. SANO	09.10.09	CODE NO.	CL579-0003-8-00
		DRAWN : TH. SANO	09.10.09		

HRS

DRAWING NO.	EDC3-159075-00
PART NO.	FX18-60P-0.8SH
CODE NO.	CL579-0003-8-00