


FB-EM-30343-000


SHT 1.1

RED CONTROLLED

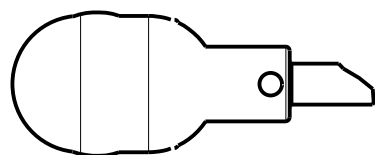

TOP VIEW
W/WINDSHIELD SHOWN
SCALE 1:1


$\varnothing 19,0 \pm 0,3$
[.748 $\pm$.012]

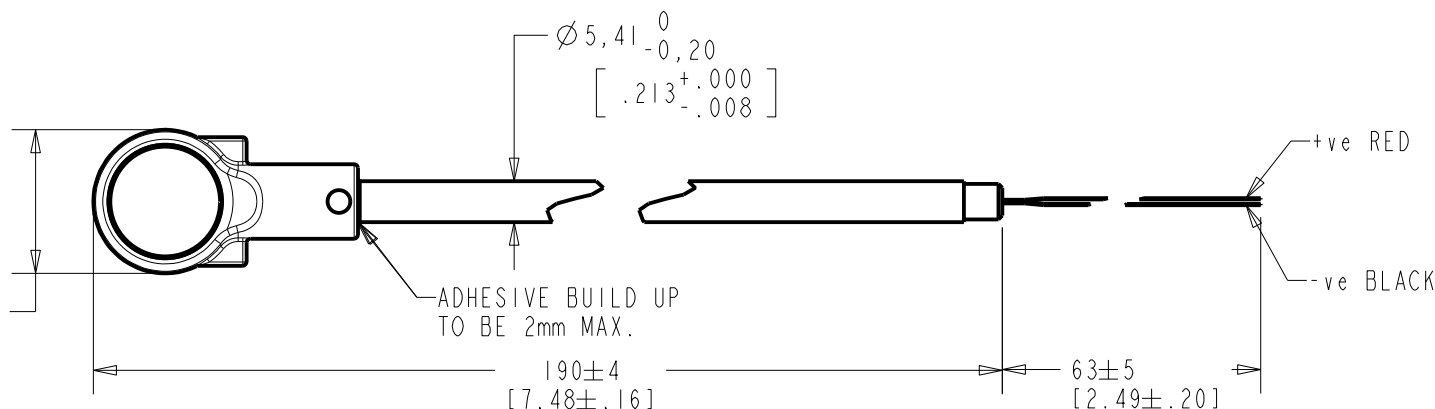

PLASTIC HOUSING, BLACK



6,10 $\pm$ 0,12
[.240 $\pm$.005]



WIRES
2mm STRIPPED & TINNED ENDS

WIRE COLOR			WEIGHT GRAMS
+ve	OUTPUT	-ve	
RED	---	BLACK	---

DIMENSIONS IN MILLIMETERS [INCHES]

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	C40101206	3-7-13	Active	C
B	C10107748	8-12-08		
A	C10107379	6-26-08		

SCALE: 1:1

DO NOT SCALE DRAWING


TITLE: BOOM MICROPHONE FB-EM-30343-000

OUTLINE DRAWING

SHT 1.1

DR. BY	DATE
TT	6-26-08
CK. BY	DATE
GJP	7-15-08
APP. BY	DATE
GJP	7-15-08

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.


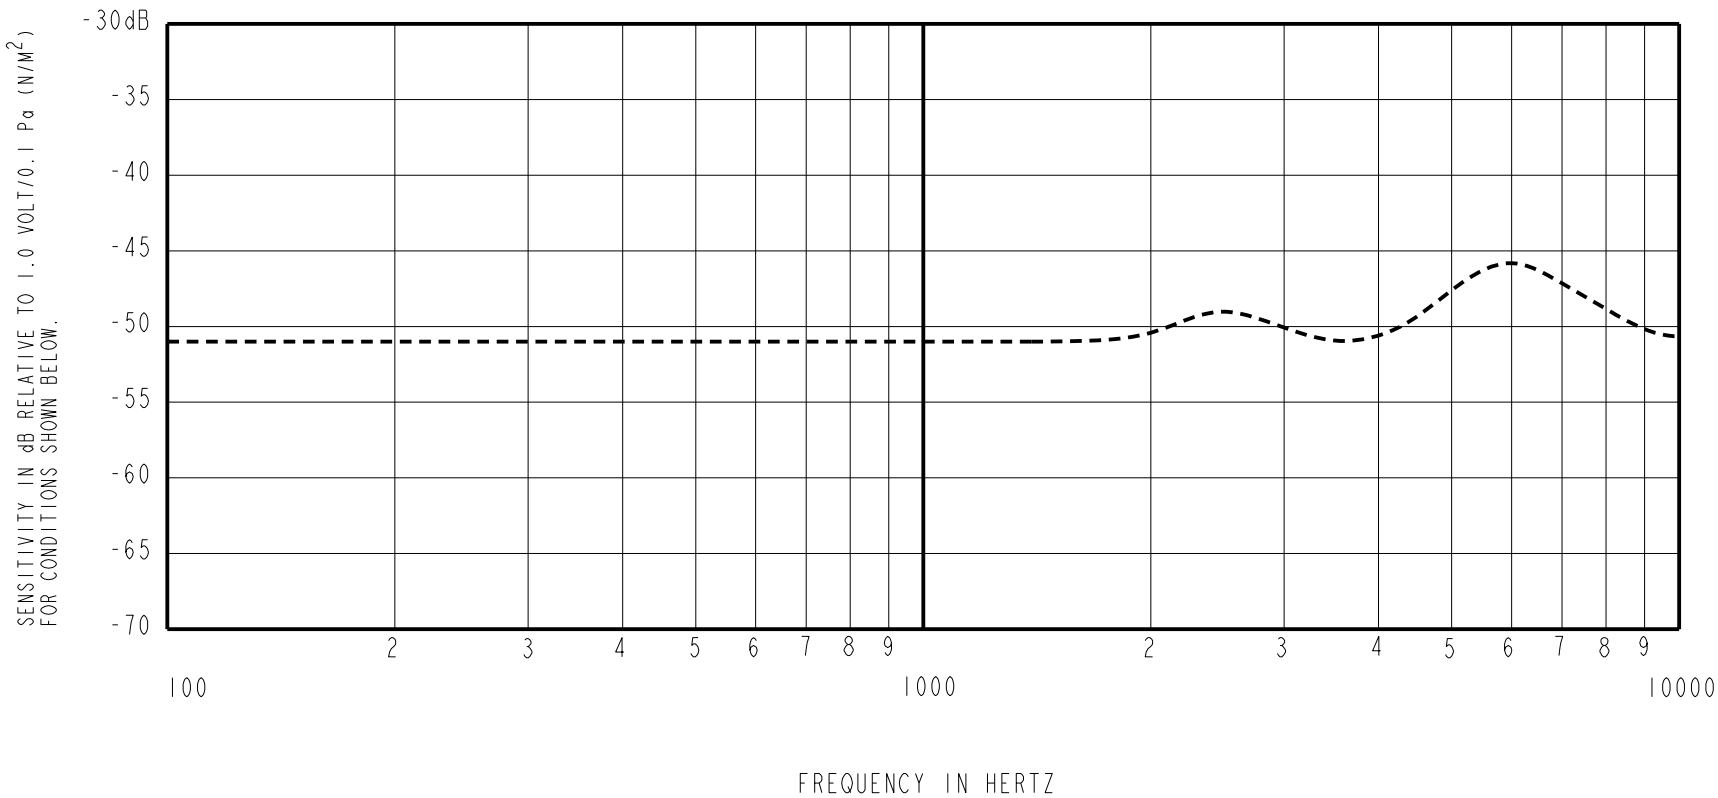


FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
300	---	-51.0	---	-4.0	+4.0
1000	-55.0	-51.0	-47	0.0	0.0
2000	---	-50.5	---	-4.0	---
6000	---	-46.5	---	0.0	+9

RED CONTROLLED

NOTES:

- MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- TEST CONDITIONS:
HEAD OF BOOM EXPOSED TO 74 dBSPL SWEPT SOUND FIELD AT 6mm FROM VOICE APERTURE.
ARTIFICIAL VOICE:
B & k 4227 MOUTH SIMULATOR.
- FOR MICROPHONE CAPSULE SPEC. SEE DRAWING WP-25993-D63
- SURVIVES 3m SUBMERSION BASED ON QUALIFICATION TESTING. 100% TEST 30 MINUTES 1m SUBMERSION; SENSITIVITY WITHIN 3dB OF INITIAL SENSITIVITY AFTER DRIED FOR 30 MINUTES AT ROOM TEMPERATURE.

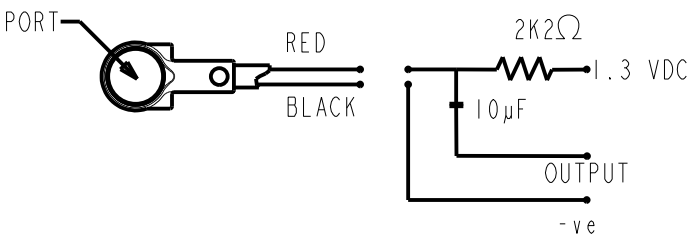

LEAD IDENTIFICATION
& TEST CIRCUIT

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	C40101206	3-7-13	Active	C
B	C10107748	8-12-08		
A	C10107379	6-26-08		
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY TT	DATE 6-26-08
TITLE: BOOM MICROPHONE FB-EM-30343-000			CK. BY GJP	DATE 7-15-08
			APP. BY GJP	DATE 7-15-08
PERFORMANCE SPECIFICATION			SHT 2.1	





PROPRIETARY NOTE: THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF KNOWLES ELECTRONICS, LLC. OR ITS AFFILIATED ENTITIES. IT IS ISSUED FOR THE EXCLUSIVE USE OF THE RECIPIENT AND IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER WITHOUT PRIOR WRITTEN PERMISSION OF, AND MUST BE RETURNED UPON REQUEST BY, KNOWLES ELECTRONICS, LLC.

FB-EM-30343-000

RED CONTROLLED

NOTES:

1. ITEM NUMBERS (SHOWN THUS **b**) ON DRAWING CORRESPOND WITH ITEM NUMBERS ON BILL OF MATERIAL.
2. ATTACH ITEM **4** TO ITEM **1** IN 4 PLACES MINIMUM ON EACH SIDE USING CEMENT.
3. SEAL BOOM END WITH ITEM **10**. BUILD UP TO BE 2mm MAX.
4. SEAL WHOLE HEAD CAVITY WITH ITEM **9**, WIRE HOLE MUST BE FILLED, ADHESIVE BUILD UP TO BE 2mm MAX.

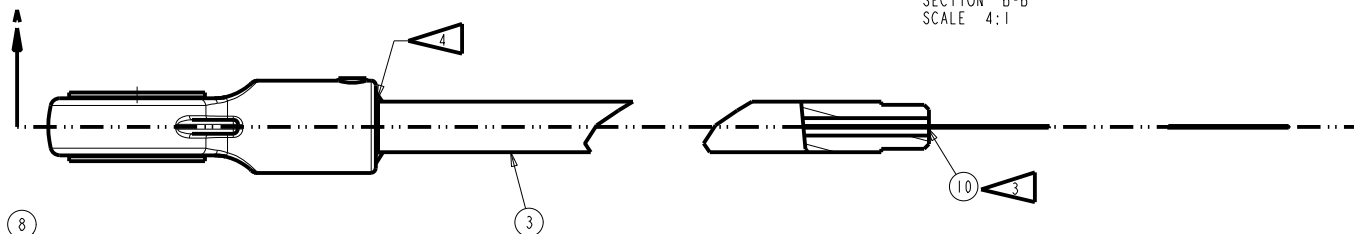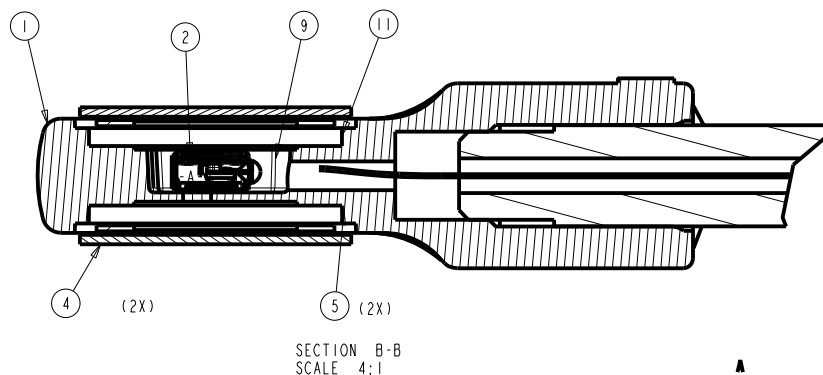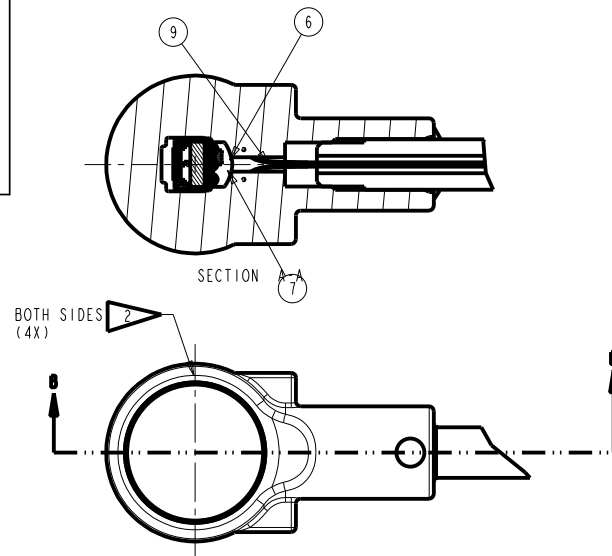

MATERIAL				SEE BILL OF MATERIALS		FINISH		RELEASE LEVEL		REVISION	
REF. 10-1747				A C10107379		B C10107748		Active		C	
B C10107748				RENAME IN PROVE		FROM FB-30343-000		SCALE: 2:1		DO NOT SCALE DRAWING	
C C40101206				UPDATE THE REVISION		00 3-7-13		DR. BY DATE		TT 6-26-08	
								CH. BY DATE		GJP 7-15-08	
								APP. BY DATE		GJP 7-15-08	
								KNOWLES ELECTRONICS		FB-EM-30343-000	
								ITASCA, ILLINOIS U.S.A.		SHEET 3.1	
								BOOM MICROPHONE			
								ASSEMBLY			

FB-EM-30343-000			KNOWLES ELECTRONICS			FB-EM-30343-000				
Sheet 4.1			ITASCA, ILLINOIS U.S.A.			Sheet 4.1				
Dr.	By	Date	Subject: BOOM MICROPHONE ASSEMBLY			Revision				
	TT	6-26-08				C				
	Ch.	GJP							7-15-08	
App.	GJP	7-15-08				Release Level				
						Active				
COL. 1			2	3			4		Item No.	Line No.
Part or Dwg. no.			Tot. Req.	Nomenclature:			Applicable Specs or Remarks			
FB-218-500			1	HOUSING					1	1
WP-25993-D63			1	MICROPHONE ASSEMBLY					2	2
FB-189-167			1	FLEXIBLE BOOM 6 mm					3	3
FB-223			2	SCREEN DISC					4	4
FB-234			2	MEMBRANE					5	5
FB-070-050			1	WIRE BLACK TEFLON					6	6
FB-070-049			1	WIRE RED TEFLON					7	7
FB-042			1	WINDSHIELD					8	8
13-092-120101			A/R	CEMENT					9	9
13-591			A/R	SILICONE SEALANT					10	10
13-092-130102			A/R	CEMENT					11	11

RED CONTROLLED

REVISION	A	c.o. C10107379
	B	c.o. C10107748
	RENAME IN PRO/E FROM FB-30343-000 TO FB-EM-30343-000 TT 8-12-08	
	C	c.o. C40101206
	FB-234 WAS FB-038 00 3-7-13	

FB-EM-30343-000
Sheet 4.1

PROPRIETARY NOTE: THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF KNOWLES ELECTRONICS, LLC. OR ITS AFFILIATED ENTITIES. IT IS ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, USED, OR DISCLOSED TO ANY THIRD PARTY PARTIALLY OR WHOLLY IN ANY MANNER WITHOUT PRIOR WRITTEN PERMISSION OF, AND MUST BE RETURNED UPON REQUEST BY, KNOWLES ELECTRONICS, LLC.

ITEM: 1000 PART: 000 PMW REV: 0