


SMD Power Inductors (NR series)

NR3012T100M

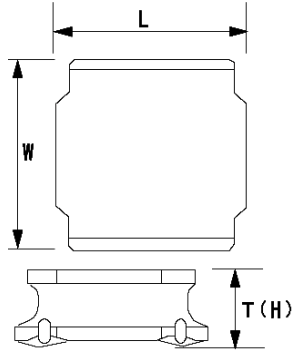

■ Features

- Item Summary
10 μ H(\pm 20%), 540mA, 630mA
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 2000pcs

■ Products characteristics table


CaseSize (EIA/JIS)	-/3012
Inductance	10 μ H(\pm 20%)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	540mA
Rated Current -Temperature Rise Current	630mA
DC Resistance (max)	0.348 Ω
Avg. of DC Resistance	0.29 Ω
Temperature Range	-25°C to 120°C
Self-resonant Frequency (min)	32MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	3mm \pm 0.1
W	3mm \pm 0.1
H	1.2mm max

■ Recommended Land Patterns

【推奨ランドパターン】 実装上の注意 ・実装状態を確認の上ご使用ください。また、ご購入の際は、 ・本製品のはんだ付けはリフローはんだ工法に限り、
【Recommended Land Patterns】 Surface Mounting ・Mounting and soldering conditions should be checked beforehand. ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NR series/NR series H type/S type /V type)			
Type	A	B	C
NR 3010, NRH3010,			
NR 3012, NRH3012, NRV3012,	0.8	2.2	2.7
NR 3015, NPS3015			

unit:mm