

**◆PART NUMBER**

| □□□              |      | □□□□     |      | □□□□□       |  | □                     | □□□                    | □□         | D×L       |
|------------------|------|----------|------|-------------|--|-----------------------|------------------------|------------|-----------|
| Rated Voltage    |      | Series   |      | Capacitance |  | Capacitance Tolerance | Option                 | Clamp Code | Case Size |
| ↑                |      | ↑        |      | ↑           |  | ↑                     | ↑                      | ↑          | ↑         |
| Rated Voltage(V) | Code | Cap.(μF) | Code |             |  | M±20%                 | Three stopping clamp   |            | 51×138    |
| 350              | 350  | 5600     | 5600 |             |  | K±10%                 | Two stopping clamp     |            | 90×241    |
| 450              | 450  | 8200     | 8200 |             |  |                       | Without stopping clamp |            |           |

Please indicate the above information, which you inquire.


Example

•Y-type clamp(Three stopping clamp) 400 LSU 5600 M TY 77×141

**◆PACKAGING SPECIFICATION**


| SIZE |        | PACKAGE QUANTITY<br>(pcs/box) | WEIGHT(REFERENCE)<br>(g/pc) | PACKAGE DIMENSIONS<br>W×D×H(mm) |
|------|--------|-------------------------------|-----------------------------|---------------------------------|
| φ36  | 36×50  | 60                            | 90                          | 460×420×255                     |
|      | 36×63  | 60                            | 110                         | 460×420×255                     |
|      | 36×83  | 60                            | 140                         | 460×420×295                     |
|      | 36×98  | 60                            | 170                         | 460×420×355                     |
|      | 36×118 | 60                            | 200                         | 460×420×355                     |
| φ51  | 51×83  | 30                            | 340                         | 525×485×215                     |
|      | 51×98  | 30                            | 390                         | 525×485×215                     |
|      | 51×118 | 30                            | 420                         | 525×485×215                     |
|      | 51×138 | 30                            | 460                         | 525×485×245                     |
|      | 51×148 | 30                            | 520                         | 525×485×245                     |
| φ64  | 64×99  | 20                            | 490                         | 525×485×215                     |
|      | 64×109 | 20                            | 540                         | 525×485×215                     |
|      | 64×119 | 20                            | 580                         | 525×485×245                     |
|      | 64×139 | 20                            | 640                         | 525×485×245                     |
|      | 64×149 | 20                            | 730                         | 525×485×245                     |
|      | 64×189 | 10                            | 820                         | 551×340×295                     |

| SIZE |        | PACKAGE QUANTITY<br>(pcs/box) | WEIGHT(REFERENCE)<br>(g/pc) | PACKAGE DIMENSIONS<br>W×D×H(mm) |
|------|--------|-------------------------------|-----------------------------|---------------------------------|
| φ77  | 77×101 | 10                            | 640                         | 680×320×215                     |
|      | 77×121 | 10                            | 730                         | 680×320×245                     |
|      | 77×141 | 10                            | 820                         | 680×320×245                     |
|      | 77×151 | 8                             | 950                         | 551×340×295                     |
|      | 77×191 | 8                             | 1100                        | 551×340×295                     |
| φ90  | 90×121 | 10                            | 950                         | 680×320×245                     |
|      | 90×141 | 10                            | 1100                        | 680×320×245                     |
|      | 90×151 | 8                             | 1300                        | 551×340×295                     |
|      | 90×191 | 8                             | 1500                        | 551×340×295                     |
|      | 90×221 | 6                             | 1900                        | 450×340×345                     |
|      | 90×241 | 6                             | 2200                        | 450×340×345                     |

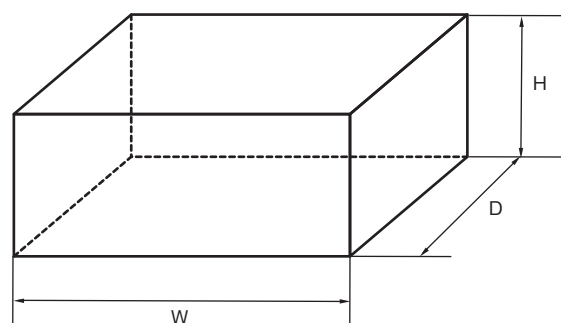

※Please contact us for Stud mounting screw terminal capacitors.

◆Dimensions in mm (not to scale)

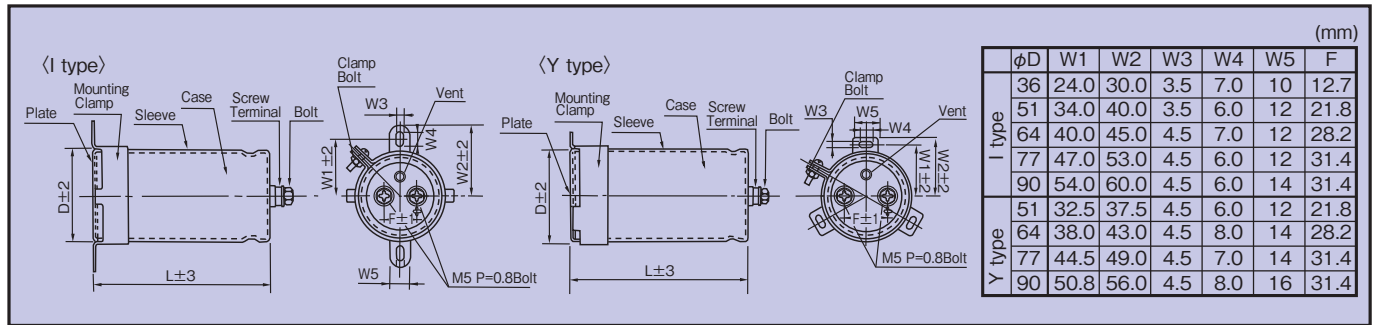


<Note> The terminal bolt and clamp is separately supplied and not attached to the product.

◆Tightening torque of bolt and Permissible current of terminal.

| Clamp Bolt | Recommended Tightening torque | Terminal | Recommended Tightening torque (Permissible Range) | Permissible Current of Terminal |
|------------|-------------------------------|----------|---------------------------------------------------|---------------------------------|
| M3         | 0.6[N·m]                      | M5       | 2.2(1.5~3.2) [N·m]                                | 60Arms                          |
| M4         | 1.3[N·m]                      | M6       | 3.2(3.0~3.5) [N·m]                                | 100Arms                         |
|            |                               | M8       | 6.3(5.8~6.8) [N·m]                                | 120Arms                         |

◆Stud Mounting Type

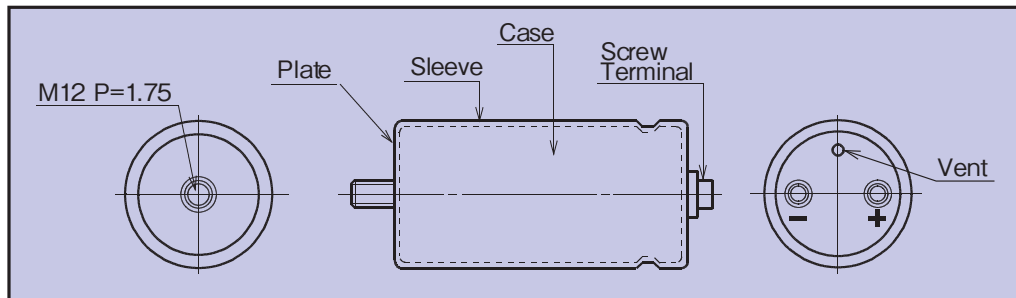

※Please contact us for Stud mounting screw terminal capacitors.