

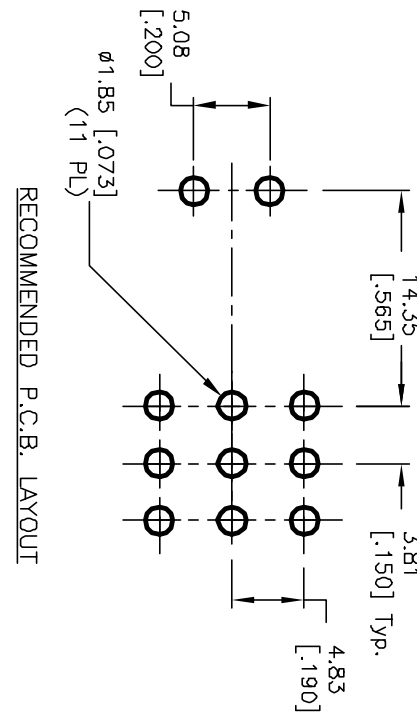


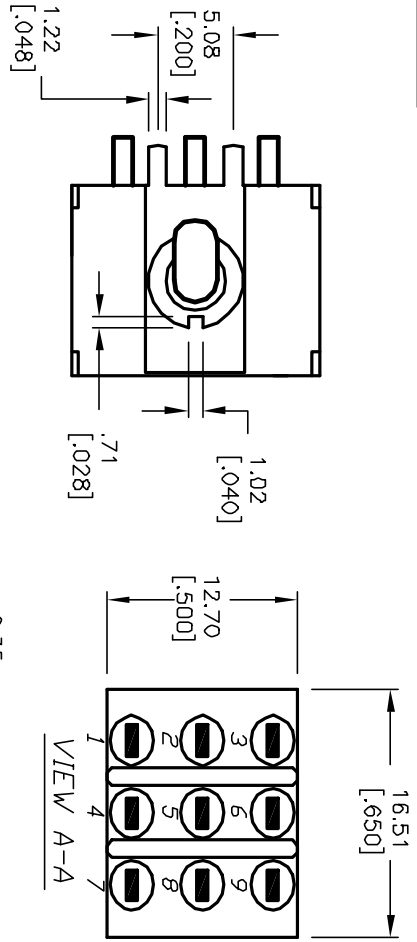

RECOMMENDED P.C.B. LAYOUT

| SWITCH FUNCTION |        |                |
|-----------------|--------|----------------|
| PDS. 1          | PDS. 2 | PDS. 3         |
| DN              | NONE   | DN             |
| 2-3,5-6<br>8-9  | DPEN   | 2-1,5-4<br>8-7 |

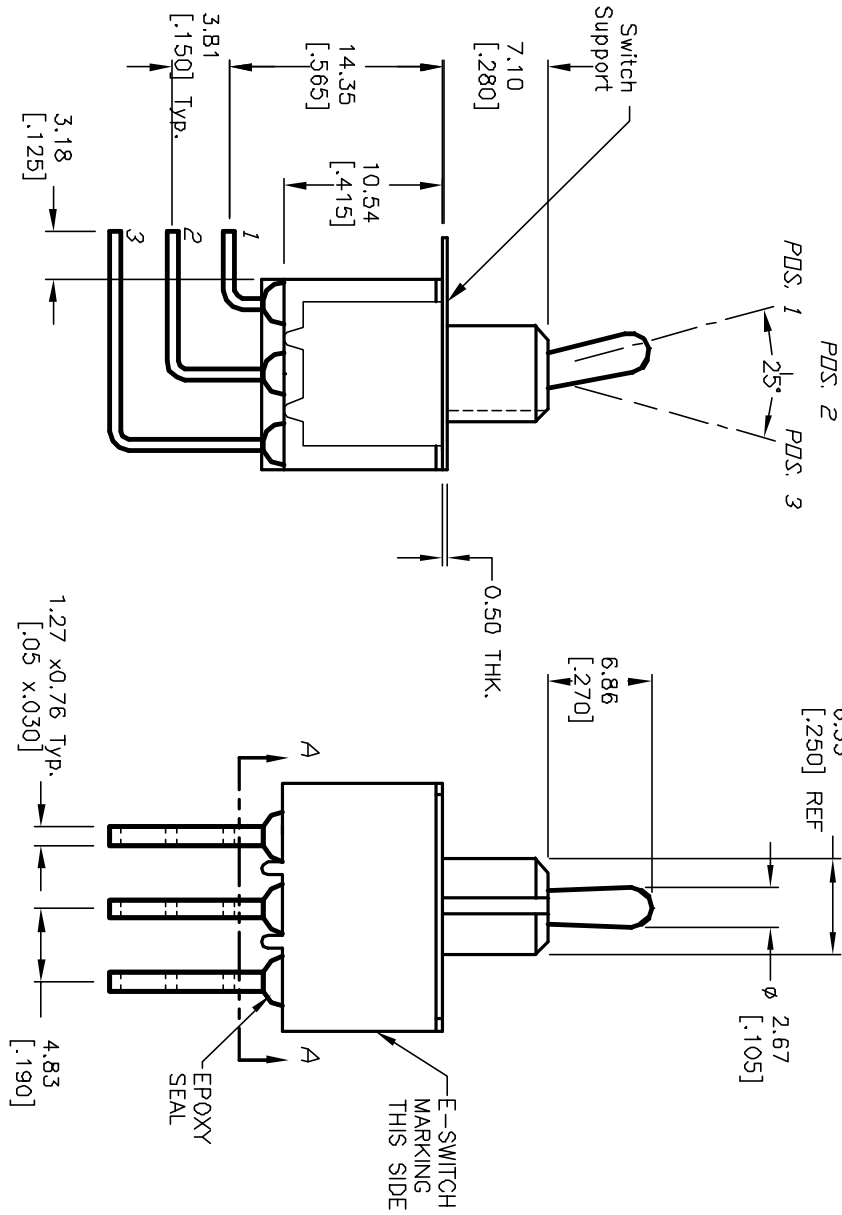

NOTES: CIRCUIT: 3PDT

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @120VAC or 28VDC; 2A @250VAC.
5. CONTACT MATERIAL: Copper Alloy W/SILVER Plate at full load.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

**E-SWITCH®**

| TITLE                                                                                                        |         |                         |             |
|--------------------------------------------------------------------------------------------------------------|---------|-------------------------|-------------|
| A                                                                                                            | 12078   | RELEASED FOR PRODUCTION | 4/19/02 CJB |
| DESCRIPTION                                                                                                  |         |                         |             |
| REV.                                                                                                         | ECN No. | DATE                    | CHKD        |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |         |                         |             |
| SCALE                                                                                                        |         | DATE                    |             |
| 2:1                                                                                                          |         | 4/19/02                 |             |
| DR                                                                                                           |         | DWG                     |             |
| CB                                                                                                           |         | T131015                 |             |
| REV                                                                                                          |         | REV                     |             |
| A                                                                                                            |         | A                       |             |