

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BM-1RS-A2

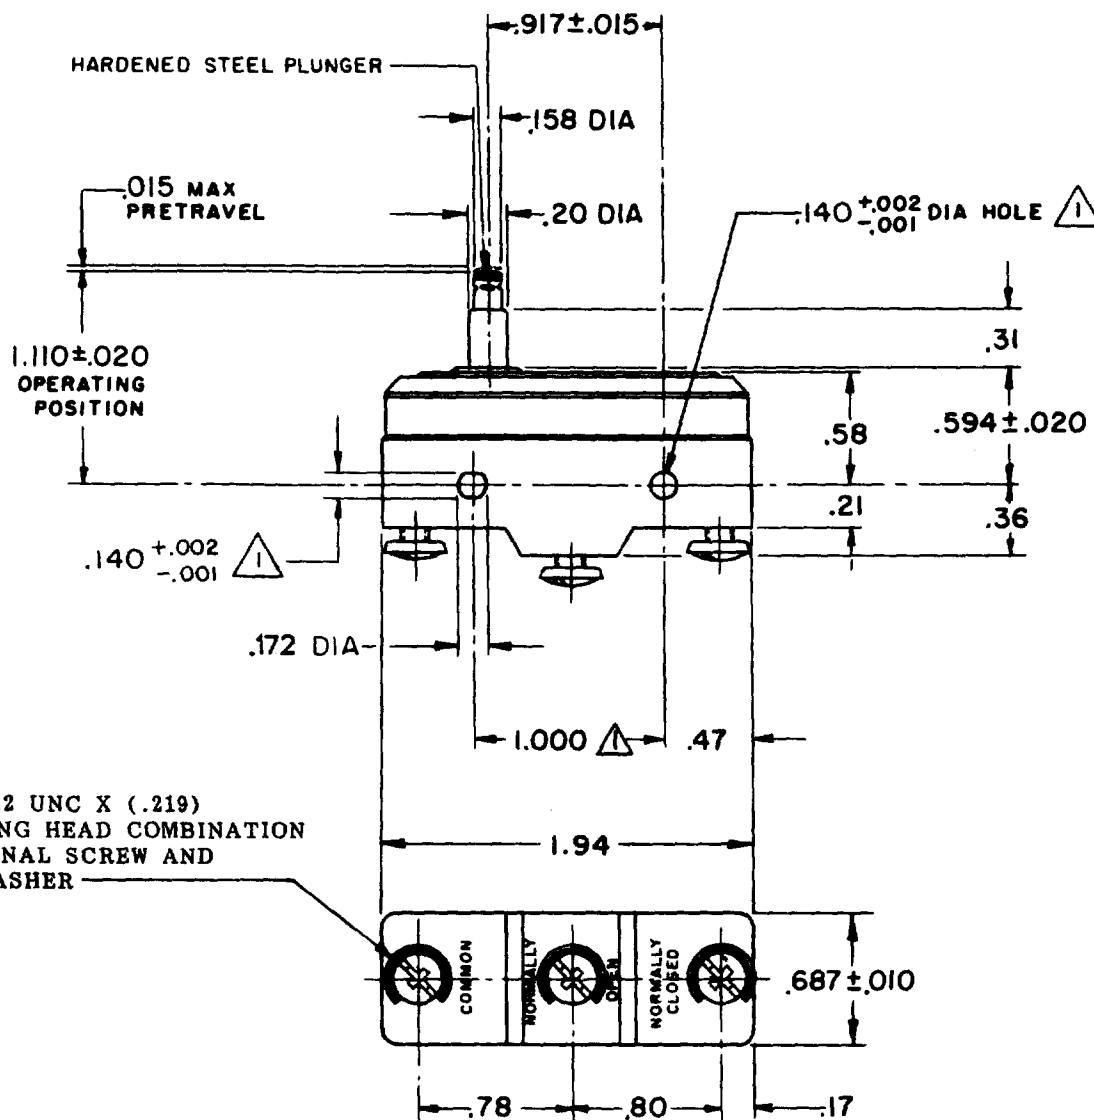

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE -

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-10 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .0005-.0010
OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L161-

22 A-125; 250, OR 480 VAC
1/2 HP-125 VAC; 1 HP-250 VAC

L288
L315
L318



22A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES 1/2°

WEIGHT .063 LB

BM-1RS-A2

DRAWING
NUMBER

ISSUE
X 2
X 6
X 3

REVISIONS

A C032342
GLH
6 AUG 73
B C044156
SJS
20 APR 78
C C0-
73287-J
JAL
22 NOV 83
D C0-
77589
KDR
29 MAR 94
E 0035411
JA
23NOV07

RASTER

FO-50378-1A

DRAWN

REPLACES

RELEASE NO. PR-1004

23NOV07

CHECK

18DEC69

RFS

CHECK

18DEC69

LS

CHECK

5 DEC. 69

6 CH