

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**SWITCH - BASIC**

CATALOG LISTING

BZ-2R291-A4**AGR9145****BZ-2R291-A4**

PAGE 1 OF 1

MDRAWING
NUMBER

5

ISSUE

REPLACES

RELEASE NO. PR-15521

CHECK

REVISIONS

A	CO-73287-0	20 OCT 93
B	CO-77588	29 MAR 94
C	CO93346	DLT 4 SEP 98
D	0017978	LKM 20 FEB 06

CHECK

87

9 APR 87

9 APR 87

9 APR 87


9 APR 87

9 APR 87

FORMTEK


FO-52846-A

DRAWN

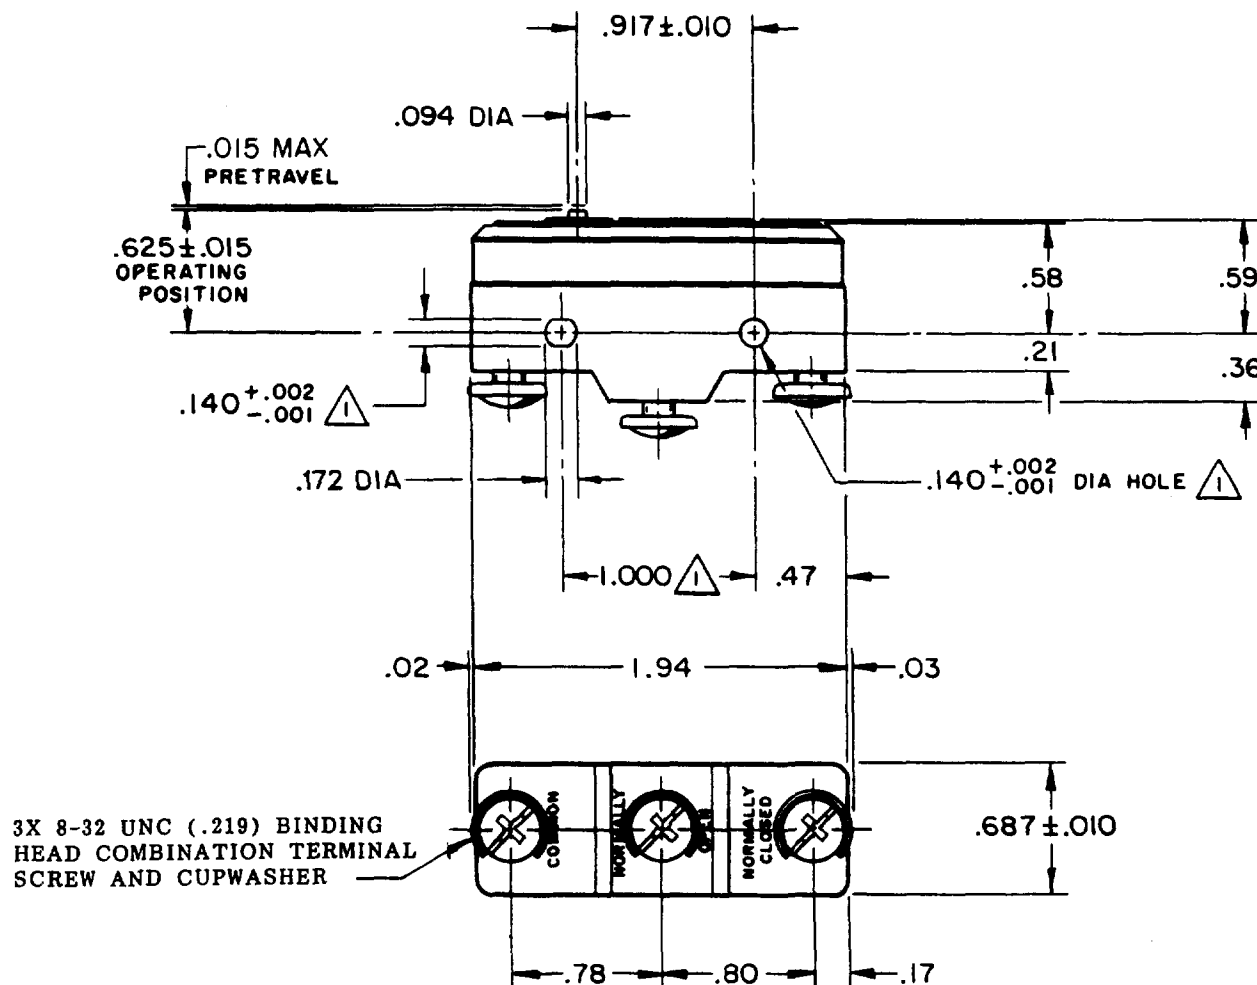

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE - - - - - 9 - 13 OZ
RELEASE FORCE - - - - - 4 OZ MIN
DIFFERENTIAL TRAVEL - - - .0004 - .0020
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L315
L306

CE 05
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

DESIGN	TOL.	DESIGN	TOL.
NO PLACES	X	1/04	X
ONE PLACE	X,X	0.4/018	X,X
TWO PLACES	X,XX	0.16/008	X,XX
THREE PLACES	X,XXX	0.13/006	X,XXX

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .063 LB