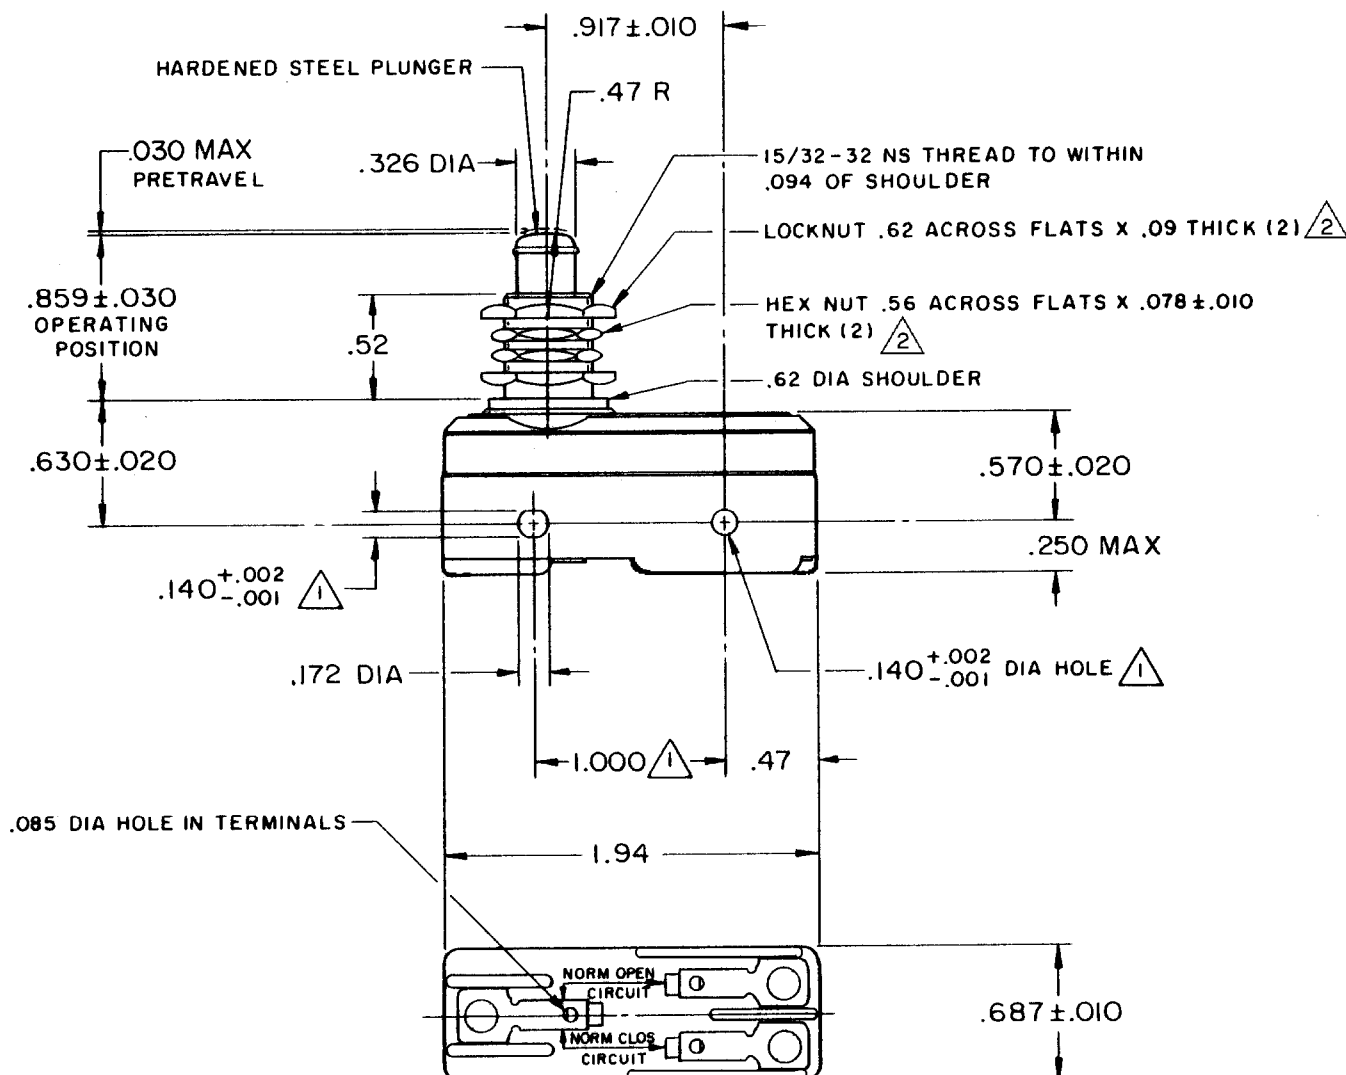


MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-7RQ1**NOTES**

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----22-28 OZ

RELEASE FORCE-----4 OZ MIN

DIFFERENTIAL TRAVEL-----.0025-.0050

OVERTRAVEL-----.219 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC. LISTED RATING
15A-125, 250 OR 480 VAC
-L96- 1/8HP-125 VAC; 1/4HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

-L288-
-L299-
-L306-

CE ® SP
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT .081 LB

BZ-7RQ1

PAGE 1 OF 1

DRAWING NUMBER

MISSUE
18**REVISIONS****A** COI7410

GCH

9 SEP 63

B CO46304

J A P

12 OCT 79

C CO

58037

SMA

1 OCT 85

D CO-

78874

DLT

18 NOV 94

E CO-82133

CSL

31 JUL 96

F CO93346

DLT

11 SEP 98

G CO-

94212-J

JJA

5 OCT 99

CHECK

30 SEPT 63

CHECK

DAW

30 SEPT 63

CHECK

DAW

30 SEPT 63

CHECK

DAW

30 SEPT 63

CHECK

DAW

30 SEPT 63

CHECK

DAW

FORMTEK

FO-52848

DRAWN