

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-7RW2T04

M8805/I-056

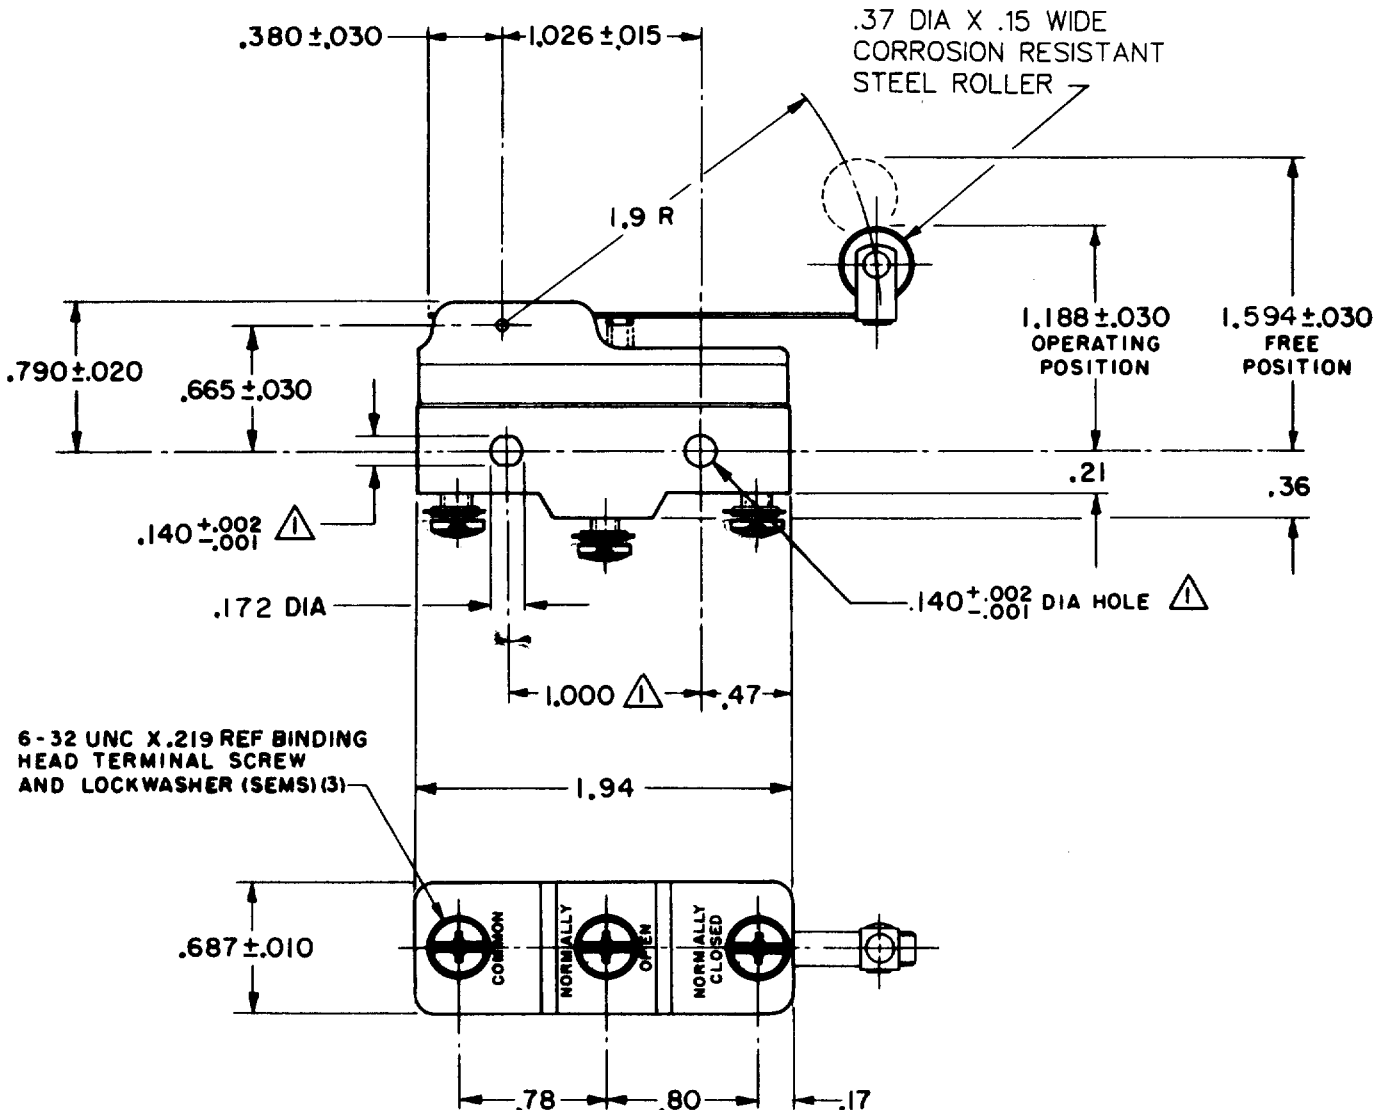

NOTE-
△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 1-4.5 OZ
RELEASE FORCE — — — — 0.75 OZ MIN
PRETRAVEL — — — — .469 MAX
DIFFERENTIAL TRAVEL — — — .150 MAX
OVERTRAVEL — — — — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT .076 LB

M BZ-7RW2T04

DRAWING NUMBER

ISSUE

REVISIONS

A 0022575

M B F

B JAN 68

CO

B 22575

G.F.S

8 AUG 68

C CO-

69351-D

JWB

18 JUL 91

D CO-

75422

JWB

DEC 93

FO-50378-1A

DRAWN

REPLACES

RELEASE NO.

CHECK

22 JAN 68

CNT

26 JAN 68

LSD

CHECK

8 JAN 68

M B F