

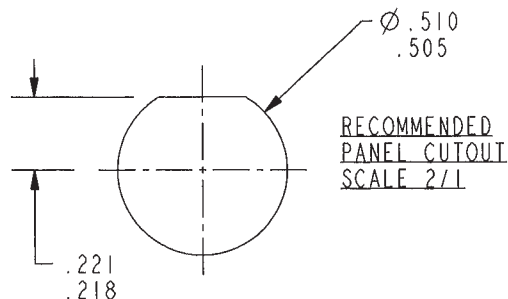



DASH NUMBER	MODEL NUMBER	LETTER CODE	IMPD Ω	A DIA	B DIM	C DIM	D DIM	E DIA
-1	CBBJR26	A	50	.046	.24	.090	.050	.0625
-2	UCBBJR26		75	.029				
-3	CBBJR26A		50	.046	.34	.090	.058	.070
-4	UCBBJR26A		75	.029				

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROMOT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			
REV	DESCRIPTIONS	DATE	APPROVED
E	REVISED PER ECO 16623	7-18-08	ORamen

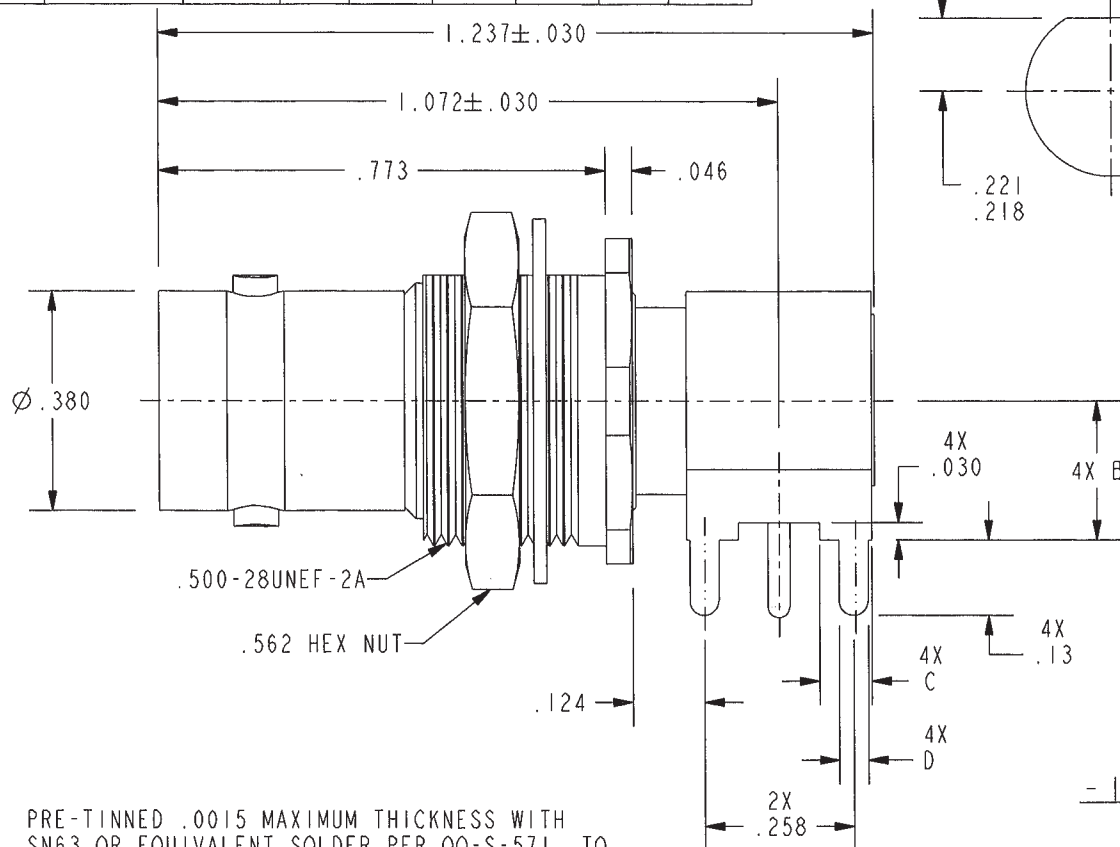

SCALE 1/1

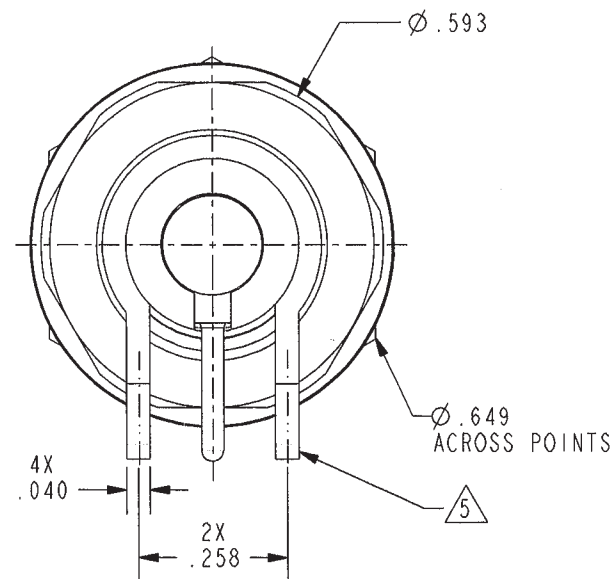

-1 SHOWN

RED INDICATES ORIGINAL

5. PRE-TINNED .0015 MAXIMUM THICKNESS WITH SN63 OR EQUIVALENT SOLDER PER QQ-S-571, TO WITHIN .060 MAXIMUM OF SHOULDER AFTER PLATING

4. MAXIMUM PANEL THICKNESS .156

3. EXAMPLE OF COMPLETE MODEL NUMBER:


CBBJR26 A

BASIC MODEL NUMBER LETTER CODE

2. FINISH: TFS-1A (NICKEL)

1. 50 & 75 Ω RIGHT ANGLE CIRCUIT BOARD AND INSULATED BULKHEAD MOUNTING BNC RECEPTACLE

NOTES: UNLESS OTHERWISE SPECIFIED.

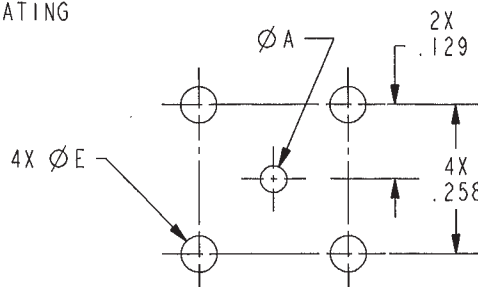

RECOMMENDED MTG HOLE PATTERN SCALE 3/1

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 ANGLE ± 1°	
DRN N JOHNSON	5-15-08	MATERIAL:	TITLE:
CHK gm	6-23-08	FINISH:	U/CBBJR26/A
QULITY			
MANUF			
APPROVED gm	7/17/08	SIZE	CAGE CODE
PROTE FILE NO. 1-0053	DO NOT SCALE DWG	A 14949	DRAWING NO. 1-0053
NEXT ASSY		SCALE 3/1	DATE 10-30-84
		SHEET 1C	REV. E