MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
DT-2R4-A7

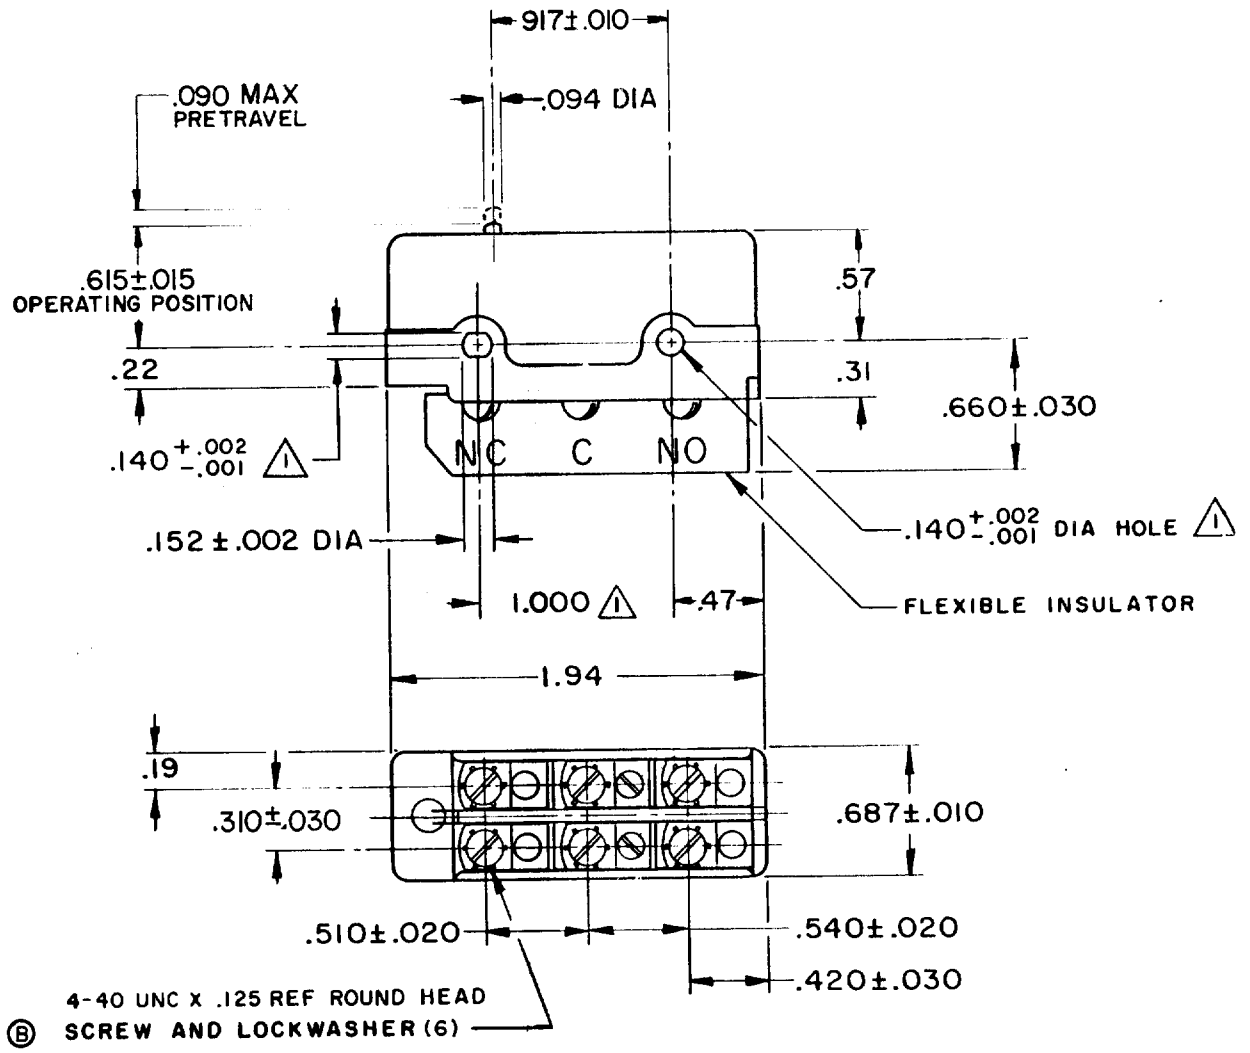

NOTE -
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 12-20 OZ
RELEASE FORCE ——— 1 OZ MIN
DIFFERENTIAL TRAVEL ——— .040-.060
OVERTRAVEL ——— .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

-L59- UNDERWRITERS' LAB. INC. LISTED RATING
10 A-125 OR 250 VAC
0.3 A-125 VDC ; 0.15 A-250 VDC

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .075 LB

DRAWN L E B 28 MAY 63
CHECK LSD 19 Jun 63

REVISIONS

A	C017725	L E B 28 MAY 63
B	C024941	M B S 21 NOV 68
C	C026075	M B S 26 AUG 69
D	C037528	C J H 31 AUG 76
E	CO 39046	G A S 16 SEPT 77
F	C061634	T S K 17 JUL 87

ISSUE 10 11 12 13
DRAWING NUMBER M DT-2R4-A7
RELEASE NO.
REPLACES
CHECK

FO-50378