

NEMA line Outlet 5-15R, Snap-in Mounting, Front Side, IDC- or Quick-connect Terminal



Snap-In Version

**Description**

- Panel Mount:
Snap-in, Front Side
- 1 Function:
Line Outlet Protection class I
- Quick connect terminals or wires

Approvals

- UL File Number: E96454
- CSA File Number: 73690

Characteristics


- Designed for standard applications

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Mounting instruction](#), [Detailed request for product](#)


Technical Data

Ratings UL/CSA	15 A / 125VAC; 60 Hz
Allowable Operation Temp.	-25 °C to +60 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Quick-Connect or Wire (solid)
Panel Thickness s	Snap-in 0.8mm to 2 mm
Material: Housing	Thermoplastic, black

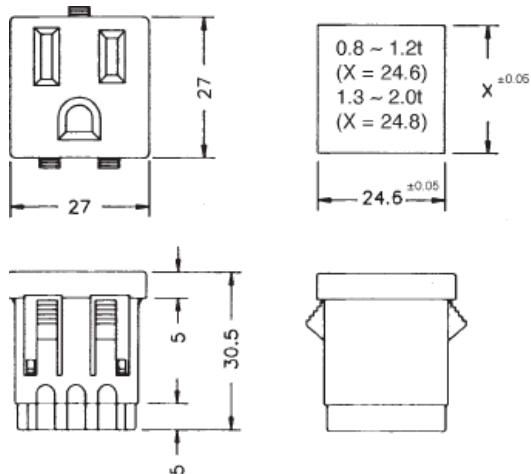
Dimensions

Panel thickness	X
0.8 - 1.2 mm	24.6 mm
1.3 - 2.0 mm	24.8 mm

Mounting instructions

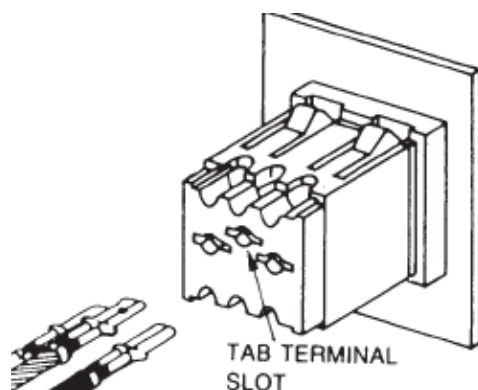

Quick connect mounting (5.2mm x 0.5mm)

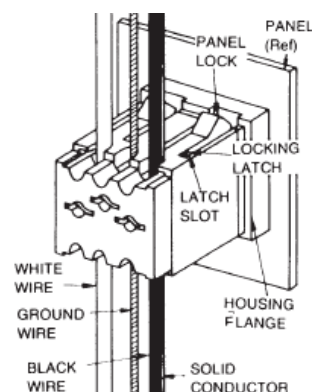

Solid Wire connection (12-14AWG)

Variants

Type	Protection Class	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
0710	I	Snap-in	0.8 -2	Quick connect terminals or wires	4300.0703

Packaging unit

120 Pcs

Mating Inlets/Plugs

Category / Description

[Power Supply Cord Overview complete](#)

EU Power Supply Cord with IEC Connector C19, straight/ angled	6004.0395
US Power Supply Cord with IEC Connector C13, straight	6009.1315
US Power Supply Cord with IEC Connector C19, straight	6009.5195
JP Power Supply Cord with IEC Connector C13, straight	6047.6414

[Power Supply Cord further types to 0710](#)[Power Supply or Interconnection Cord Overview complete](#)

Diverse Power Supply and Interconnection Cords 2.5 A	CS01.0221.150
Diverse Power Supply and Interconnection Cords 2.5 A	CS02.0221.150

[Power Supply or Interconnection Cord further types to 0710](#)